



Metal Oxide Resistors, Special Purpose, High Voltage



The ROX is an excellent choice for high voltage systems with the advantage of high wattage and space saving dimensions.

Note

* This datasheet provides information about parts that are RoHS-compliant and /or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details

FEATURES

- Low TCR: ± 200 ppm/ $^{\circ}$ C standard; ± 100 ppm/ $^{\circ}$ C, ± 50 ppm/ $^{\circ}$ C available; non-inductive only available with TC of ± 200 ppm/ $^{\circ}$ C
- Tolerance: ± 1 %; ± 2 %; ± 5 %; ± 10 %
- High voltage (up to 45 kV)
- For oil bath or open air operation
- Standard ROX product is coated; optional uncoated version of the ROX product is available on request
- Matched sets available
- Special testing available upon request
- Applications: HV power supplies; laboratory equipment; power control; aeronautical
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL MODEL | HISTORICAL MODEL | POWER RATING | | | MAXIMUM WORKING VOLTAGE (1) V | RESISTANCE RANGE (2) Ω | TOLERANCE \pm % | TEMPERATURE COEFFICIENT (3) \pm ppm/ $^{\circ}$ C |
|--------------|------------------|-------------------------------|-------------------------------|--------------------------------|----------------------------------|----------------------------------|----------------------|--|
| | | $P_{25^{\circ}\text{C}}$ W | $P_{70^{\circ}\text{C}}$ W | $P_{125^{\circ}\text{C}}$ W | | | | |
| ROX050 | ROX-1/2 | 2 | 1.4 | 1 | 2K | 1M to 100M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 100M | 1, 2, 5, 10 | 100 |
| | | | | | | 100 to 1G | 1, 2, 5, 10 | 200 |
| ROX050..P | ROX-1/2P | 2.8 | 1.96 | 1.4 | 2K | 1M to 100M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 100M | 1, 2, 5, 10 | 100 |
| | | | | | | 100 to 1G | 1, 2, 5, 10 | 200 |
| ROX075 | ROX-3/4 | 3 | 2.16 | 1.5 | 5K | 1M to 100M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 500M | 1, 2, 5, 10 | 100 |
| | | | | | | 100 to 3G | 1, 2, 5, 10 | 200 |
| ROX075..N | ROX-3/4N | 3 | 2.16 | 1.5 | 5K | 100 to 1M | 1, 2, 5, 10 | 200 |
| ROX075..P | ROX-3/4P | 4.2 | 3.02 | 2.1 | 5K | 1M to 100M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 500M | 1, 2, 5, 10 | 100 |
| | | | | | | 100 to 3G | 1, 2, 5, 10 | 200 |
| ROX075..NP | ROX-3/4NP | 4.2 | 3.02 | 2.1 | 5K | 100 to 1M | 1, 2, 5, 10 | 200 |
| ROX100 | ROX-1 | 4 | 2.88 | 2 | 7.5K | 1M to 100M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 500M | 1, 2, 5, 10 | 100 |
| | | | | | | 150 to 3G | 1, 2, 5, 10 | 200 |
| ROX100..N | ROX-1N | 4 | 2.88 | 2 | 7.5K | 100 to 1M | 1, 2, 5, 10 | 200 |
| ROX100..P | ROX-1P | 5.6 | 4.03 | 2.8 | 7.5K | 1M to 100M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 500M | 1, 2, 5, 10 | 100 |
| | | | | | | 150 to 3G | 1, 2, 5, 10 | 200 |
| ROX100..NP | ROX-1NP | 5.6 | 4.03 | 2.8 | 7.5K | 100 to 1M | 1, 2, 5, 10 | 200 |
| ROX150 | ROX-1-1/2 | 5 | 3.6 | 2.5 | 11K | 1M to 100M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 500M | 1, 2, 5, 10 | 100 |
| | | | | | | 200 to 3G | 1, 2, 5, 10 | 200 |
| ROX150..N | ROX-1-1/2N | 5 | 3.6 | 2.5 | 11K | 100 to 1M | 1, 2, 5, 10 | 200 |



| STANDARD ELECTRICAL SPECIFICATIONS | | | | | | | | |
|------------------------------------|------------------|-------------------------|-------------------------|--------------------------|---|--------------------------------------|------------------|--|
| GLOBAL MODEL | HISTORICAL MODEL | POWER RATING | | | MAXIMUM WORKING VOLTAGE ⁽¹⁾ V | RESISTANCE RANGE ⁽²⁾ Ω | TOLERANCE ± % | TEMPERATURE COEFFICIENT ⁽³⁾ ± ppm/°C |
| | | P _{25 °C} W | P _{70 °C} W | P _{125 °C} W | | | | |
| ROX150..P | ROX-1-1/2P | 7 | 5.04 | 3.5 | 11K | 1M to 100M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 500M | 1, 2, 5, 10 | 100 |
| | | | | | | 200 to 3G | 1, 2, 5, 10 | 200 |
| ROX150..NP | ROX-1-1/2NP | 7 | 5.04 | 3.5 | 11K | 100 to 1M | 1, 2, 5, 10 | 200 |
| ROX200 | ROX-2 | 6 | 4.32 | 3 | 15K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 205 to 3G | 1, 2, 5, 10 | 200 |
| ROX200..N | ROX-2N | 6 | 4.32 | 3 | 15K | 100 to 1M | 1, 2, 5, 10 | 200 |
| ROX200..P | ROX-2P | 8.4 | 6.05 | 4.2 | 15K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 205 to 3G | 1, 2, 5, 10 | 200 |
| ROX200..NP | ROX-2NP | 8.4 | 6.05 | 4.2 | 15K | 100 to 1M | 1, 2, 5, 10 | 200 |
| ROX300 | ROX-3 | 10 | 7.2 | 5 | 22.5K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 330 to 3G | 1, 2, 5, 10 | 200 |
| ROX300..N | ROX-3N | 10 | 7.2 | 5 | 22.5K | 400 to 10M | 1, 2, 5, 10 | 200 |
| ROX300..P | ROX-3P | 14 | 10.1 | 7 | 22.5K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 330 to 3G | 1, 2, 5, 10 | 200 |
| ROX300..NP | ROX-3NP | 14 | 10.1 | 7 | 22.5K | 400 to 10M | 1, 2, 5, 10 | 200 |
| ROX400 | ROX-4 | 12 | 8.64 | 6 | 30K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 600 to 3G | 1, 2, 5, 10 | 200 |
| ROX400..N | ROX-4N | 12 | 8.64 | 6 | 30K | 500 to 10M | 1, 2, 5, 10 | 200 |
| ROX400..P | ROX-4P | 16.8 | 12.1 | 8.4 | 30K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 600 to 3G | 1, 2, 5, 10 | 200 |
| ROX400..NP | ROX-4NP | 16.8 | 12.1 | 8.4 | 30K | 500 to 10M | 1, 2, 5, 10 | 200 |
| ROX500 | ROX-5 | 16 | 11.5 | 8 | 37.5K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 750 to 3G | 1, 2, 5, 10 | 200 |
| ROX500..N | ROX-5N | 16 | 11.5 | 8 | 37.5K | 500 to 10M | 1, 2, 5, 10 | 200 |
| ROX500..P | ROX-5P | 22.4 | 16.1 | 11.2 | 37.5K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 750 to 3G | 1, 2, 5, 10 | 200 |
| ROX500..NP | ROX-5NP | 22.4 | 16.1 | 11.2 | 37.5K | 500 to 10M | 1, 2, 5, 10 | 200 |
| ROX600 | ROX-6 | 20 | 14.4 | 10 | 45K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 850 to 3G | 1, 2, 5, 10 | 200 |
| ROX600..N | ROX-6N | 20 | 14.4 | 10 | 45K | 500 to 10M | 1, 2, 5, 10 | 200 |
| ROX600..P | ROX-6P | 28 | 20.2 | 14 | 45K | 1M to 500M | 1, 2, 5, 10 | 50 |
| | | | | | | 1k to 1G | 1, 2, 5, 10 | 100 |
| | | | | | | 850 to 3G | 1, 2, 5, 10 | 200 |
| ROX600..NP | ROX-6NP | 28 | 20.2 | 14 | 45K | 500 to 10M | 1, 2, 5, 10 | 200 |

Notes

- Resistance values of 1 kΩ and below are calibrated at 1 V_{DC}, values above 1 kΩ up to 100 kΩ are calibrated at 10 V_{DC}, and values above 100 kΩ are calibrated at 100 V_{DC}. Calibration at other voltages available

- ± 1 % not available above 1 GΩ

- Part marking: Print marked - Dale, model, value, tolerance, temperature coefficient, date code

⁽¹⁾ Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less

⁽²⁾ For resistance values above and below those listed please contact us

⁽³⁾ Typical TCR results



| GLOBAL PART NUMBER INFORMATION | | | | | | |
|--|---|---|--|---|--|---|
| New Global Part Numbering: ROX300100MGNF5 (preferred part numbering format) | | | | | | |
| <div style="display: flex; justify-content: space-around; font-weight: bold; font-size: 1.2em;"> ROX 3 0 0 1 0 0 M G N F 5 </div> | | | | | | |
| GLOBAL MODEL <small>(see Electrical Specifications table)</small> | RESISTANCE VALUE R = Ω K = kΩ M = MΩ G = GΩ 910R = 910 Ω 10M0 = 10 MΩ 1G00 = 1.0 GΩ | TOLERANCE CODE F = ± 1 % G = ± 2 % J = ± 5 % K = ± 10 % | TEMP. COEFFICIENT H = 50 ppm K = 100 ppm N = 200 ppm | PACKAGING (1) EL = lead (Pb)-free, lacer (all, except 3, 4, 5, 6) EE = lead (Pb)-free, T / R (1/2, 3/4, 1 only) EM = lead (Pb)-free, foam (3, 4, 5, 6 only) LB = tin / lead, lacer (all, except 3, 4, 5, 6) RF = tin / lead, T / R (1/2, 3/4, 1 only) F5 = tin / lead, foam (3, 4, 5, 6 only) | CONSTRUCTION <small>(up to 2 digits)</small> blank = standard N = non-inductive P = 0.040 Ø leads S = solid body, axial T = threaded terminals -18 = Uncoated Y = one end axial, one threaded terminal | SPECIAL blank = standard (dash number) (up to 3 digits) from 1 to 999 as applicable |
| Historical Part Number example: ROX-3100MGN (will continue to be accepted) | | | | | | |
| ROX-3 | | 100M | G | N | F05 | |
| HISTORICAL MODEL | CONSTRUCTION | RESISTANCE VALUE | TOLERANCE CODE | TEMP. COEFFICIENT | PACKAGING | |

Notes

- (1) Some packaging codes are model specific
- For additional information on packaging, refer to the Through-Hole Resistor Packaging document (www.vishay.com/doc?31544)

| TECHNICAL SPECIFICATIONS | | | | | | | | | | |
|----------------------------|------|---|--------|--------|--------|--------|--------|--------|--------|--------|
| PARAMETER | UNIT | ROX050 | ROX075 | ROX100 | ROX150 | ROX200 | ROX300 | ROX400 | ROX500 | ROX600 |
| Insulation Resistance | Ω | ≥ 10 ¹¹ | | | | | | | | |
| Category Temperature Range | °C | Epoxy coated = -55 / +180; silicone coated = -55 / +230 | | | | | | | | |


| DIMENSIONS in inches (millimeters) | | | | |
|--|---------------------------------|----------------|-------------------------------|----------------|
| <p>Standard ROX and Styles N, P, and S Style P has 0.040 (1.02) diameter leads.</p> | | | | |
| <p>Style Y 0.032 ± 0.002 (0.81 ± 0.05) Dia., 1.50 ± 0.125 (38.10 ± 3.175), C Max., 0.330 (8.38) Max. Dia., UNC #6-32 2B</p> | | | | |
| <p>Style T C, 0.330 (8.38) Max. Dia., UNC #6-32 2B</p> | | | | |
| GLOBAL MODEL | STANDARD ROX AND STYLES N, P, S | | STYLE T | STYLE Y |
| | A | B | C | C MAX. |
| ROX050 | 0.550 ± 0.032 (13.97 ± 0.81) | 0.700 (17.78) | N/A | N/A |
| ROX075 | 0.800 ± 0.032 (20.32 ± 0.81) | 0.900 (22.86) | 1.168 ± 0.022 (29.66 ± 0.56) | 1.050 (26.67) |
| ROX100 | 0.920 ± 0.032 (23.37 ± 0.81) | 1.020 (25.91) | 1.288 ± 0.022 (32.72 ± 0.56) | 1.170 (29.72) |
| ROX150 | 1.550 ± 0.032 (39.37 ± 0.81) | 1.650 (41.91) | 1.918 ± 0.022 (48.72 ± 0.56) | 1.800 (45.72) |
| ROX200 | 2.050 ± 0.032 (52.07 ± 0.81) | 2.150 (54.61) | 2.418 ± 0.022 (61.42 ± 0.56) | 2.300 (58.42) |
| ROX300 | 3.050 ± 0.032 (77.47 ± 0.81) | 3.150 (80.01) | 3.418 ± 0.022 (86.82 ± 0.56) | 3.300 (83.82) |
| ROX400 | 4.050 ± 0.032 (102.87 ± 0.81) | 4.150 (105.41) | 4.418 ± 0.022 (112.22 ± 0.56) | 4.300 (109.22) |
| ROX500 | 5.050 ± 0.032 (128.27 ± 0.81) | 5.150 (130.81) | 5.418 ± 0.022 (137.62 ± 0.56) | 5.300 (134.62) |
| ROX600 | 6.050 ± 0.032 (153.67 ± 0.81) | 6.150 (156.21) | 6.418 ± 0.022 (163.02 ± 0.56) | 6.300 (160.02) |

Note

- All dimensions given are for the standard coated version of the ROX parts




DERATING

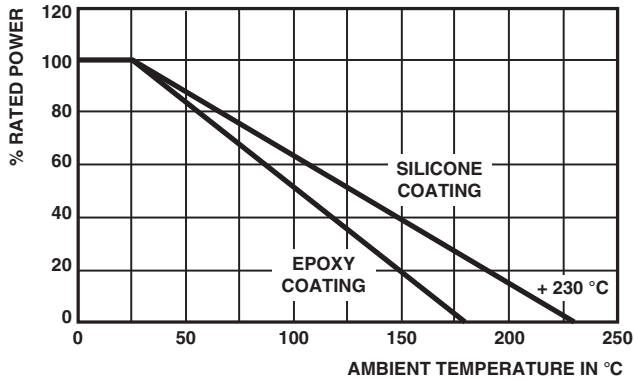


| MECHANICAL SPECIFICATIONS | |
|---------------------------|---|
| Terminal Strength | 10 pound pull test |
| Solderability | Continuous satisfactory coverage when tested in accordance with MIL-STD-202, Method 208 |

| MATERIAL SPECIFICATIONS | |
|-------------------------|---|
| Element | High temperature fired cermet film |
| Core | High purity 96 % alumina, tubular or solid |
| Coating | Blue flame-retardant epoxy on ROX050 thru ROX200. Black flameproof silicone on ROX300 thru ROX600 |
| Termination | Standard lead material is solder-coated copper; solderable and weldable. 0.032" (0.813 mm) style P 0.040" (1.02 mm) available |

VOLTAGE COEFFICIENT

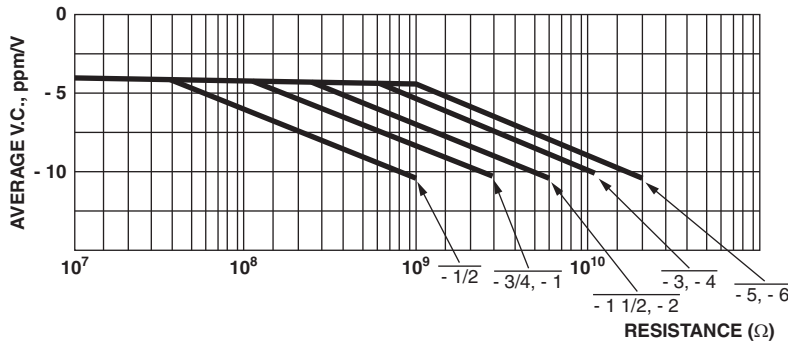

MAXIMUM WORKING VOLTAGE

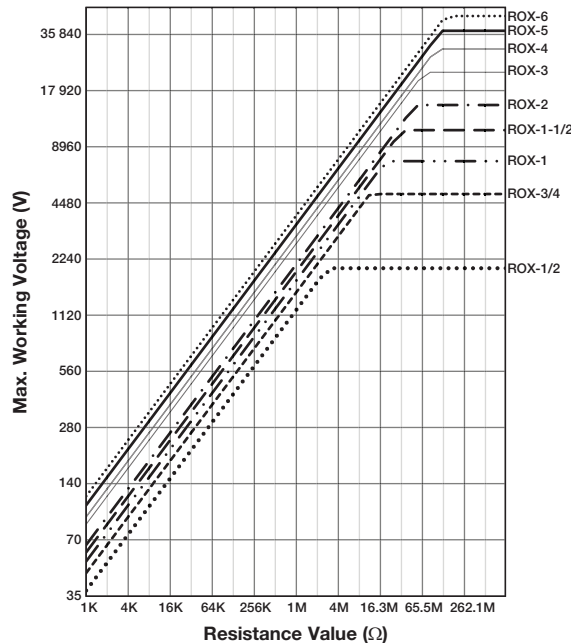



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Metal Oxide Resistors](#) category:

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[009260C](#) [FA87/180R/5%](#) [SBL4R010J](#) [281-1.0K](#) [R0229](#) [M012CT52R220J](#) [434529B](#) [WMO5S-100KJA05](#) [054084X](#) [054211G](#) [054220E](#)
[095734G](#) [WK202070A1003JD500](#) [WR404140A2208JFE00](#) [MOSX1CT528R2R20F](#) [RSF5SSJT-73-170R](#) [RSF-25JT-52-330RW](#) [RSF200JT-73-0R52](#) [ROX2SJ4K3](#) [ROX5SJ120R](#) [ROX3SJR10](#) [ROX2SJ200K](#) [RSF200JT-73-0R27](#) [RSF1WSJT-52-140R](#) [RSF50SJT-52-0R1](#) [RSF50SJT-52-0R39](#) [RSF100JT-73-8R2](#) [RSF50SJT-52-200K](#) [RSF-50JT-52-2M](#) [RSF50SJT-52-820K](#) [RSF-50JT-52-2R2](#) [ROX05SJ110R](#) [ROX05SJ130R](#)
[ROX05SJ200R](#) [ROX05SJ240R](#) [ROX05SJ270R](#) [ROX05SJ360R](#) [ROX05SJ390R](#) [ROX05SJ430R](#) [ROX05SJ470R](#) [ROX05SJ510R](#)
[ROX05SJ560R](#) [ROX05SJ620R](#) [ROX05SJ820R](#) [ROX05SJ1K1](#) [ROX05SJ1K2](#) [ROX05SJ1K3](#) [ROX05SJ1K6](#) [ROX05SJ2K4](#) [ROX05SJ2K7](#)