

## Power Resistor for Mounting onto a Heatsink Thick Film Technology



### FEATURES

- Compliant with requirement #26 of NF-EN45545-2
- High power rating
- Low thermal radiation of the case
- Wide ohmic value range
- Easy mounting
- High overload capabilities
- Reduced size and weight
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT

### DESIGN SUPPORT TOOLS AVAILABLE



This new style has been developed as an extension to RCH range. Through the use of thick film technology, a non-inductive solution for power resistors is available which are rated up to 100 W at +25 °C. The terminations position prevents any risk of an electrical arc to the heatsink. This resistor series can replace and offer advantages to standard wirewound devices.

### DIMENSIONS in millimeters

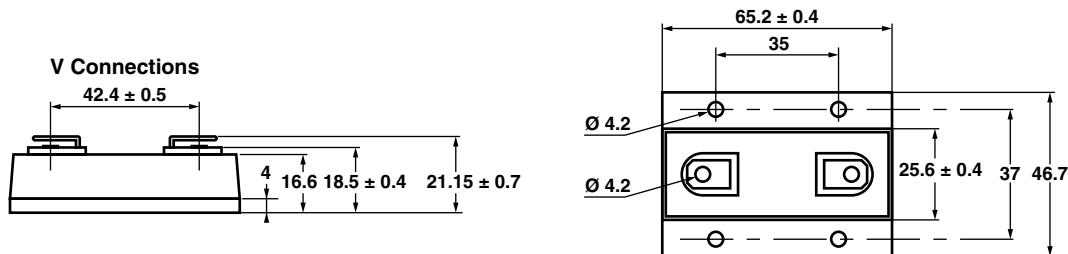

#### Note

- Tolerances unless stated: ± 0.2 mm

### STANDARD ELECTRICAL SPECIFICATIONS

| MODEL   | SIZE | RESISTANCE RANGE<br>Ω      | RATED POWER<br>$P_{25\text{ }^{\circ}\text{C}}$<br>W | LIMITING ELEMENT VOLTAGE $U_L$<br>V | TOLERANCE<br>± % | TEMPERATURE COEFFICIENT<br>± ppm/°C |
|---------|------|----------------------------|--|-------------------------------------|------------------|-------------------------------------|
| RPH 100 | 100  | 0.092 to 1M <sup>(1)</sup> | 100  | 1900                                | 1, 2, 5, 10      | 150                                 |

#### Note

- <sup>(1)</sup> E24 series

### MECHANICAL SPECIFICATIONS

|                               |  |
|-------------------------------|--|
| Mechanical Protection         | Insulated case UL 94 V-0                           |
| Resistive Element             | Cermet   |
| Substrate                     | Alumina on metallic base of nickel coated aluminum |
| End Connections               | V connections: Screws M4 x 6                       |
| Tightening Torque Connections | 1 Nm   |
| Tightening Torque Heatsink    | 3 Nm   |
| Weight                        | 60 g ± 10 %  |

### ENVIRONMENTAL SPECIFICATIONS

|                    |                         |
|--------------------|-------------------------|
| Thermal Resistance | $R_{th(j-c)}$ 0.55 °C/W |
| Temperature Range  | -55 °C to +125 °C       |
| Climatic Category  | 55 / 125 / 56           |

### TECHNICAL SPECIFICATIONS

|                                 |            |   |
|---------------------------------|------------|---|
| Power Rating                    | Continuous | 100 W at 25 °C                                      |
|                                 | Momentary  | chassis mounted 0.45 °C/W<br>10 W at 25 °C free air |
| Temperature Coefficient         | Standard   | ± 300 ppm/°C < 1 Ω                                  |
|                                 |            | ± 150 ppm/°C > 1 Ω                                  |
| Thermal Resistance              |            | 0.55 °C/W   |
| Dielectric Strength MIL STD 202 |            | 5 kV <sub>RMS</sub> , 1 min,<br>10 mA max.          |
| Insulation Resistance           |            | > 10 <sup>6</sup> MΩ                                |
| Inductance                      |            | < 0.1 μH  |



| PERFORMANCE                              |   |                                 |
|--|---|---------------------------------|
| TESTS                                    | CONDITIONS  | REQUIREMENTS                    |
| Short Time Overload                      | NF EN 140 000 CEI 115_1<br>4 Pr / 5 s $U_S < 2 U_L$         | $< \pm (0.25 \% + 0.05 \Omega)$ |
| Rapid Temperature Change                 | NF EN 140000 CEI 68214 Test Na<br>5 cycles, -55 °C, +125 °C | $< \pm (0.25 \% + 0.05 \Omega)$ |
| Load Life<br>(Chassis Mounted 0.45 °C/W) | NF EN 140 000<br>Pr at 25 °C, 1000 h                        | $< \pm (0.5 \% + 0.05 \Omega)$  |
| Humidity (Steady State)                  | MIL STD 202 Method 103 B Test D<br>56 days, 95 % RH         | $< \pm (0.5 \% + 0.05 \Omega)$  |

| RESISTANCE VALUE IN RELATION TO TOLERANCE AND TCR |                                      |                                      |
|---|--------------------------------------|--------------------------------------|
| Ohmic Value                                       | $< 1 \Omega$                         | $> 1 \Omega$                         |
| Standard Tolerance                                | $\pm 5 \%$                           | $\pm 5 \%$                           |
| Standard TCR                                      | $\pm 300 \text{ ppm}/^\circ\text{C}$ | $\pm 150 \text{ ppm}/^\circ\text{C}$ |
| Tolerance On Request                              | $\pm 1 \% \text{ to } \pm 2 \%$      |                                      |

**RECOMMENDATIONS FOR MOUNTING ONTO A HEATSINK**

- Surfaces in contact must be carefully cleaned.
- The heatsink must have an acceptable flatness: From 0.05 mm to 0.1 mm/100 mm.
- Roughness of the heatsink must be around 6.3 μm. In order to improve thermal conductivity, surfaces in contact (alumina, heatsink) should be coated with a silicone grease (type SI 340 from Rhône-Poulenc or Dow 340 from Dow Corning).
- The fastening of the resistor to the heatsink is under pressure control of two screws (not supplied).

|                               |         |
|-------------------------------|---------|
| Tightening Torque on Heatsink | RPH 100 |
|                               | 3 Nm    |

- In order to improve the dissipation, either forced-air cooling or liquid cooling may be used.
- Do not forget to respect an insulation value between two resistors (dielectric strength in dry air 1 kV/mm).

**CHOICE OF THE HEATSINK**

The user must choose the heatsink according to the working conditions of the component (power, room temperature). Maximum working temperature must not exceed 125 °C. The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{R_{TH(j-c)} + R_{TH(c-h)} + R_{TH(h-a)}}$$

- P: Expressed in W
- ΔT: Difference between maximum working temperature and room temperature
- R<sub>TH(j-c)</sub>: Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component: 0.55 °C/W.
- R<sub>TH(c-h)</sub>: Thermal resistance value measured between outer side of the resistor and upper side of the heatsink. This is the thermal resistance of the interface (grease, thermal pad), and the quality of the fastening device.
- R<sub>TH(h-a)</sub>: Thermal resistance of the heatsink.

**Example:**

R<sub>TH(c-a)</sub> for RPH 100 power rating 80 W at ambient temperature +40 °C.

ΔT ≤ 125 °C - 40 °C ≤ 85 °C

R<sub>TH(j-c)</sub> + R<sub>TH(c-h)</sub> + R<sub>TH(h-a)</sub> =  $\frac{\Delta T}{P} = \frac{85}{80} = 1.06 \text{ }^\circ\text{C}/\text{W}$

R<sub>TH(c-h)</sub> + R<sub>TH(h-a)</sub> ≤ 1.06°C/W - 0.55 °C/W ≤ 0.51 °C/W



**OVERLOADS**

In any case the applied voltage must be lower than  $2 U_n$ .  
 $U_{max.} < 2 U_n < 3800 V$ .


**Short time overload:**  $4 \times Pr/5 s$

**Accidental overload:** The values indicated on the following graph are applicable to resistors in air or mounted onto a heatsink.


**MARKING**

Series, style, ohmic value (in  $\Omega$ ), tolerance (in %), manufacturing date, Vishay Sfernice trademark.

**ENERGY CURVE**

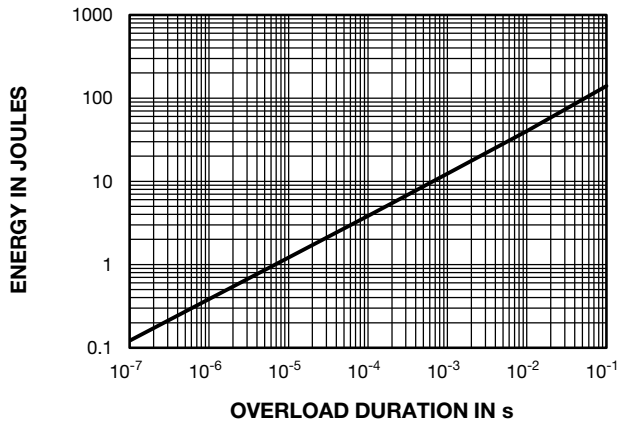


**POWER CURVE**

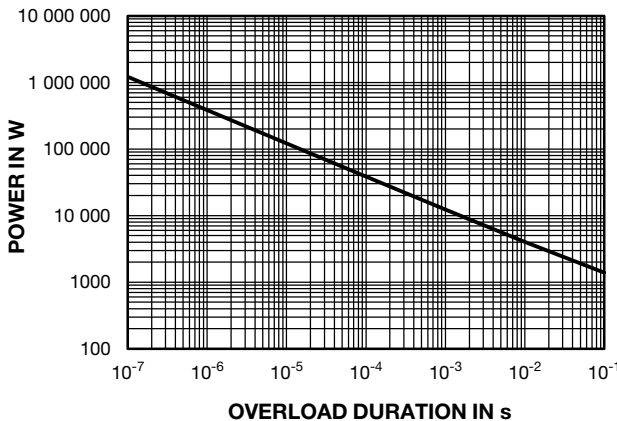

**POWER RATING**

For resistor mounted onto a heatsink with thermal resistance of  $0.45 \text{ }^\circ\text{C/W}$ .

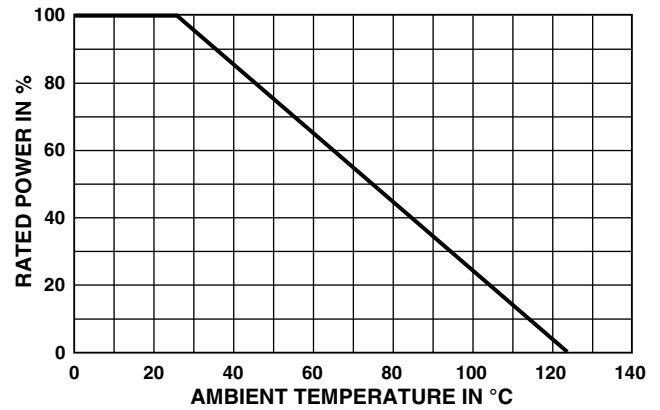



| ORDERING INFORMATION |            |                  |                         |             |  |
|----------------------|------------|------------------|-------------------------|-------------|--|
| <b>RPH</b>           | <b>100</b> | <b>3.3 kΩ</b>    | <b>± 5 %</b>            | <b>V</b>    | <b>xxx</b>   |
| MODEL                | STYLE      | RESISTANCE VALUE | TOLERANCE               | CONNECTIONS | CUSTOM DESIGN optional on request: special TCR, shape etc. |
|                      |            |                  | ± 1 %<br>± 2 %<br>± 5 % | V: M4 screw |  |

| GLOBAL PART NUMBER INFORMATION |            |                     |  |          |          |          |   |                            |                                  |          |          |          |          |  |
|--------------------------------|------------|---------------------|--|----------|----------|----------|---|----------------------------|----------------------------------|----------|----------|----------|----------|--|
| <b>R</b>                       | <b>P</b>   | <b>H</b>            | <b>1</b>   | <b>0</b> | <b>0</b> | <b>V</b> | <b>1</b>  | <b>0</b>                   | <b>0</b>                         | <b>0</b> | <b>0</b> | <b>J</b> | <b>B</b> |  |
| GLOBAL MODEL                   | SIZE       | LEADS               | OHMIC VALUE  |          |          |          | TOLERANCE   | PACKAGING                  | SPECIAL                          |          |          |          |          |  |
| <b>RPH</b>                     | <b>100</b> | <b>V = M4 screw</b> | The first four digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point.<br><b>48R70</b> = 48.7 Ω<br><b>48701</b> = 48 700 Ω<br><b>10002</b> = 100 kΩ<br><b>R0100</b> = 0.01 Ω<br><b>R6800</b> = 0.68 Ω<br><b>27000</b> = 2700 Ω = 2.7 kΩ |          |          |          | <b>F</b> = 1 %<br><b>G</b> = 2 %<br><b>J</b> = 5 %<br><b>K</b> = 10 % | <b>B</b> = box<br>5 pieces | As applicable<br><b>Ex</b> = XXX |          |          |          |          |  |

| RELATED DOCUMENTS   |  |
|---|--|
| <b>APPLICATION NOTES</b>  |  |
| Pulse Capabilities for Thick Film Power Resistors                 | <a href="http://www.vishay.com/doc?50060">www.vishay.com/doc?50060</a> |
| Guidelines for Vishay Sfernice Resistive and Inductive Components | <a href="http://www.vishay.com/doc?52029">www.vishay.com/doc?52029</a> |



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Planar Resistors - Chassis Mount](#) category:*

*Click to view products by [Vishay](#) manufacturer:*

Other Similar products are found below :

[20-100RP](#) [BAB326622R0KE](#) [BDS2A10033RK](#) [TAP800K68RE](#) [BB326610R0KE](#) [TL88J136C](#) [BA416775R0KE](#) [TL122KU221RE](#)  
[TGHDV100RJE](#) [TL71F9K40C](#) [FPA100 47K J](#) [RCEC750HV6802JB](#) [TAP650J4R7E](#) [TGHHV100RJE](#) [TGHHV33R0JE](#) [TGHHV500RJE](#)  
[TGHHV5K00JE](#) [TGHHV5R00JE](#) [TGHHV680RJE](#) [TGHLV100RJE](#) [TGHLV150RJE](#) [TGHLV1K00JE](#) [TGHLV1R00JE](#) [TGHLV500RJE](#)  
[TGHLV5K00JE](#) [TGHLVR100JE](#) [HTS-14-12-40-3/4.8](#) [HTS-14-24-40-3/4.8](#) [HTS-15-230-100-1](#) [HTS-15-230-100-3/4.8](#) [HTS-15-230-100-3/6.3](#) [HTS-15-230-150-3/6.3](#) [FPA100 100R J](#) [FPA100 1K5 J](#) [FPA100 2R2 J](#) [FPA100 3R3 J](#) [LPS0600HR400KB](#) [LPS0800L1001KB](#) [GBR-605-230-20-1](#) [GBR-605-230-60-2](#) [GBR-612-12-40-1](#) [GBR-612-24-40-1](#) [GBR-618-24-10-2](#) [GBR-618-24-5-2](#) [GBR-618-3-5-2](#) [GBR-618-9-5-2](#)  
[GBR-619-230-60-2](#) [FPA100-1RJ](#) [HTS-14-230-100-3/4.8](#) [RCEC400GS2702KB](#)