


Thick Film Planar Resistors, Through-Hole, High Voltage



APPLICATIONS

Applications include power supplies, transformers and any application requiring operation within an environment where high voltages are used.

FEATURES

- 30 000 V capability
- Very low voltage coefficient to less than 1 ppm/V
- Outstanding stability under adverse conditions
- Stable cermet resistive element bonded to a high-purity alumina substrate
- Tough epoxy-based coating and high voltage stability
- Dividers available, see Vishay Techno's TD datasheet (www.vishay.com/doc?68042)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



Note

* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details.

STANDARD ELECTRICAL SPECIFICATIONS					
GLOBAL MODEL / SIZE	POWER RATING $P_{25^{\circ}\text{C}}$ W	MAXIMUM WORKING VOLTAGE ⁽¹⁾ V	RESISTANCE RANGE ⁽²⁾ Ω	TOLERANCE \pm %	TEMPERATURE COEFFICIENT \pm ppm/ $^{\circ}\text{C}$
TR03C	0.25	0.8K	300 to 3M	1, 2, 5, 10, 20	100
				300 to 25M	1, 2, 5, 10, 20
TR03X	0.25	2.5K	25M to 250M	1, 2, 5, 10, 20	200, 300
				260M to 2G	5, 10, 20
	0.5	4K	2.1G to 10G	5, 10, 20	500
TR05D			0.5	4K	500 to 25M
					3K to 200M
TR05X	0.5	5K	30M to 1G	1, 2, 5, 10, 20	200, 300
					1.1G to 20G
	1	6.5K	21G to 100G	5, 10, 20	500
TR10F			1	6.5K	1K to 16M
					2K to 120M
TR10X	1	10K	20M to 1G	1, 2, 5, 10, 20	200, 300
					1.1G to 15G
	1.5	12.5K	16G to 1T	5, 10, 20	500
TR15G			1.5	12.5K	1.5K to 45M
					5K to 340M
TR15X	1.5	15K	60M to 1G	1, 2, 5, 10, 20	200, 300
					1.1G to 35G
	2	17.5K	36G to 1.5T	5, 10, 20	500
TR20H			2	17.5K	2K to 64M
					8K to 480M
TR20X	2	20K	80M to 1G	1, 2, 5, 10, 20	200, 300
					1.1G to 50G
	3	25K	51G to 2T	5, 10, 20	500
TR30J			3	25K	3K to 82M
					8.5K to 620M
TR30X	3	30K	80M to 1G	1, 2, 5, 10, 20	200, 300
					1.1G to 60G
			61G to 3T	5, 10, 20	500

Notes

- Custom sizes available
 - Voltage coefficient: typically less than 1 ppm/V (tested per MIL-STD-202)
- (1) Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less.
- (2) All resistance values are calibrated at 100 V_{DC}. Calibration at other voltages available upon request.

GLOBAL PART NUMBER INFORMATION												
New Global Part Numbering: TR20H1K00FKEB (preferred part number format)												
T	R	2	0	H	1	K	0	0	F	K	E	B
GLOBAL MODEL	SIZE / POWER / VOLTAGE RATING			RESISTANCE VALUE		TOLERANCE		TCR		TERMINAL FINISH		PACKAGING
TR	03C = 0.25 W, med. voltage 03X = 0.25 W, max. voltage 05D = 0.5 W, med. voltage 05X = 0.5 W, max. voltage 10F = 1 W, med. voltage 10X = 1 W, max. voltage 15G = 1.5 W, med. voltage 15X = 1.5 W, max. voltage 20H = 2 W, med. voltage 20X = 2 W, max. voltage 30J = 3 W, med. voltage 30X = 3 W, max. voltage			R = Ω K = kΩ M = MΩ G = GΩ T = TΩ 400R = 400 Ω 10M0 = 10 MΩ 1T00 = 1 TΩ		F = ± 1.0 % G = ± 2.0 % J = ± 5.0 % K = ± 10.0 % M = ± 20.0 %		K = 100 ppm N = 200 ppm M = 300 ppm P = 500 ppm		E = Sn100 R = Sn60/Pb40		B = bag S = strip
Historical Part Numbering: TR20H1001FKe3 (will continue to be accepted)												
TR	20H		1001		F	K	e3					
HISTORICAL MODEL	SIZE / POWER RATING		RESISTANCE VALUE		TOLERANCE	TCR	TERMINAL FINISH					

Note

- For additional information on packaging, refer to the Through Hole Resistor Packaging document (www.vishay.com/doc?31544).

MECHANICAL SPECIFICATIONS

Resistive Element: thick film
Substrate: 96 % pure alumina
Encapsulation: epoxy base, conformal coating
Terminals: solder plated copper leads
Terminal Strength: 4.5 pounds pull-test
Power: derated from ambient temperature +25 °C


ENVIRONMENTAL SPECIFICATIONS

Temperature Range: -55 °C to +125 °C (for higher temperature range, consult factory)
Load Life: less than 0.15 %, 1000 h

DIMENSIONS in inches (millimeters)				
MODEL	A (LENGTH)	B (HEIGHT)	C (LEAD SPACING)	D (LEAD DIA.)
TR03	0.300 ± 0.030 (7.62 ± 0.76)	0.210 ± 0.021 (5.33 ± 0.53)	0.200 ± 0.020 (5.08 ± 0.51)	0.025 ± 0.002 (0.64 ± 0.05)
TR05	0.500 ± 0.050 (12.70 ± 1.27)	0.300 ± 0.030 (7.62 ± 0.76)	0.400 ± 0.040 (10.16 ± 1.02)	0.025 ± 0.002 (0.64 ± 0.05)
TR10	1.00 ± 0.100 (25.40 ± 2.54)	0.350 ± 0.035 (8.89 ± 0.89)	0.900 ± 0.090 (22.86 ± 2.29)	0.032 ± 0.002 (0.81 ± 0.05)
TR15	1.50 ± 0.150 (38.10 ± 3.81)	0.350 ± 0.035 (8.89 ± 0.89)	1.40 ± 0.140 (35.56 ± 3.56)	0.032 ± 0.002 (0.81 ± 0.05)
TR20	2.00 ± 0.200 (50.80 ± 5.08)	0.350 ± 0.035 (8.89 ± 0.89)	1.90 ± 0.190 (48.26 ± 4.83)	0.032 ± 0.002 (0.81 ± 0.05)
TR30	3.00 ± 0.300 (76.20 ± 7.62)	0.400 ± 0.040 (10.16 ± 1.02)	2.90 ± 0.290 (73.66 ± 7.37)	0.032 ± 0.002 (0.81 ± 0.05)



DERATING

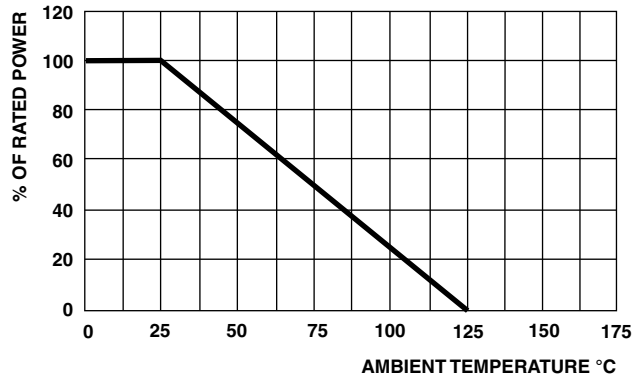



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - Through Hole](#) category:

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[M8340104M4701GCD03](#) [M8340105K3300GGD03](#) [M8340105K3922FGD03](#) [M8340106K1002JCD03](#) [M8340107K1002GGD03](#)

[M8340107K1152FGD03](#) [M8340107K2701GCD03](#) [M8340107M2002GCD03](#) [M8340108K1000GCD03](#) [M8340108K5601GCD03](#)

[M8340108M2203GCD03](#) [M8340109K1002JCD03](#) [M8340109K1003GCD03](#) [M8340109K2001GCD03](#) [M8340109K5101GGD03](#)

[FHV05010M0FKRB](#) [MOX-2-125005F](#) [MP850-3.00-1%](#) [hte24511kf](#) [SM-SP093](#) [ARC3.11 2M J A](#) [M8340105K1001GCD03](#)

[M8340105K3002GGD03](#) [M8340105M1002JGD03](#) [M8340107K2001GGD03](#) [M8340107K4701GGD03](#) [M8340107K5101GGD03](#)

[M8340107K5600GGD03](#) [M8340108K4990FGD03](#) [M8340108K49R9FGD03](#) [M8340108M10R0GGD03](#) [M8340109K2202GGD03](#)

[M8340109K5601GCD03](#) [MOX-GRD-001](#) [MOX-SP020](#) [MOX-SP025E](#) [M8340107K2001GCD03](#) [M8340102M4701GBD04](#)

[M8340102K1002GBD04](#) [M8340102K1002GAD04](#) [M8340109K2002GGD03](#) [M8340108K22R0GGD03](#) [M8340107M5100GGD03](#) [OE1305](#)

[WMHP100-R22J](#) [M8340104K39R2FCD03](#) [M8340106MA012JHD03](#) [M8340107K1003GGD03](#) [MS126-9.09K-0.1%](#) [MS126-249K-0.1%](#)