




Standard 7-Segment SMD Display 10 mm

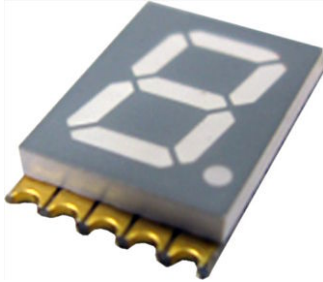

FEATURES

- Evenly lighted segments
- Grey package surface
- Untinted segments
- Luminous intensity categorized
- Yellow, green, and soft orange categorized for color
- Wide viewing angle
- Suitable for DC and high peak current
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912



RoHS COMPLIANT

DESCRIPTION

The VDM.10A1 series are 10 mm SMD seven segment LED displays in a very compact package.

The devices utilize AlInGaP on GaAs chip technology.

PRODUCT GROUP AND PACKAGE DATA

- Product group: Display
- Package: 10 mm
- Product series: SMD
- Angle of half intensity: $\pm 50^\circ$

APPLICATIONS

- Panel meters
- Test- and measure-equipment
- Point-of-sale terminals
- Control units

| PARTS TABLE | | | | | | | | | | | | | | |
|-------------|-------------|---------------------------------------|------|------|---------------|-----------------|------|------|---------------|---------------------|------|------|---------------|--------------|
| PART | COLOR | LUMINOUS INTENSITY (μcd) | | | at I_F (mA) | WAVELENGTH (nm) | | | at I_F (mA) | FORWARD VOLTAGE (V) | | | at I_F (mA) | CIRCUITRY |
| | | MIN. | TYP. | MAX. | | MIN. | TYP. | MAX. | | MIN. | TYP. | MAX. | | |
| VDMR10A1 | Super red | 450 | 1600 | - | 1 | - | 631 | - | 20 | - | 2.0 | 2.6 | 20 | Common anode |
| VDMO10A1 | Soft orange | 180 | 650 | - | 1 | - | 605 | - | 20 | - | 2.0 | 2.6 | 20 | Common anode |
| VDMY10A1 | Yellow | 450 | 1600 | - | 1 | - | 587 | - | 20 | - | 2.0 | 2.6 | 20 | Common anode |
| VDMG10A1 | Green | 110 | 500 | - | 1 | - | 572 | - | 20 | - | 2.0 | 2.6 | 20 | Common anode |

| ABSOLUTE MAXIMUM RATINGS ($T_{amb} = 25^\circ\text{C}$, unless otherwise specified) | | | | |
|---|----------------|-----------|-------------|-------|
| VDMR10A1, VDMO10A1, VDMY10A1, VDMG10A1 | | | | |
| PARAMETER | TEST CONDITION | SYMBOL | VALUE | UNIT |
| Power dissipation per segment | | P_V | 70 | mW |
| Peak forward current per segment (frequency 1 kHz, 10 % duty cycle) | | I_F | 60 | mA |
| Continuous forward current per segment | | I_F | 25 | mA |
| Forward current derating from 25 °C | | | 0.28 | mA/°C |
| Operating temperature range | | T_{amb} | -35 to +105 | °C |
| Storage temperature range | | T_{stg} | -35 to +105 | °C |
| Iron soldering conditions: 1/16" below seating plane for 3 s at 260 °C | | | | |

**OPTICAL AND ELECTRICAL CHARACTERISTICS** ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)
VDMR10A1, SUPER RED

| PARAMETER | TEST CONDITION | PART | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|--|----------------------|----------|-----------------|------|--------|------|----------------|
| Luminous intensity ⁽¹⁾ | $I_F = 1\text{ mA}$ | VDMR10A1 | I_V | 450 | 1600 | - | μcd |
| | $I_F = 10\text{ mA}$ | VDMR10A1 | I_V | - | 20 800 | - | μcd |
| Dominant wavelength | $I_F = 20\text{ mA}$ | VDMR10A1 | λ_d | - | 631 | - | nm |
| Peak emission wavelength | $I_F = 20\text{ mA}$ | | λ_p | - | 639 | - | nm |
| Spectral line half-width | $I_F = 20\text{ mA}$ | | $\Delta\lambda$ | - | 20 | - | |
| Forward voltage per segment | $I_F = 20\text{ mA}$ | | V_F | - | 2.0 | 2.6 | V |
| Reverse current per segment ⁽²⁾ | $V_R = 5\text{ V}$ | | I_R | - | - | 100 | μA |
| Luminous intensity matching ratio | $I_F = 10\text{ mA}$ | | I_{V-m} | - | - | 2:1 | |

Notes

- (1) Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
(2) Reverse voltage is only for IR test. It can not continue to operate at this situation.
(3) Cross talk specification $\leq 2.5\%$.

OPTICAL AND ELECTRICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)
VDMO10A1, SOFT ORANGE

| PARAMETER | TEST CONDITION | PART | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|--|----------------------|----------|-----------------|------|------|------|----------------|
| Luminous intensity ⁽¹⁾ | $I_F = 1\text{ mA}$ | VDMO10A1 | I_V | 180 | 650 | - | μcd |
| | $I_F = 10\text{ mA}$ | VDMO10A1 | I_V | - | 8250 | - | μcd |
| Dominant wavelength | $I_F = 20\text{ mA}$ | VDMO10A1 | λ_d | - | 605 | - | nm |
| Peak emission wavelength | $I_F = 20\text{ mA}$ | | λ_p | - | 611 | - | nm |
| Spectral line half-width | $I_F = 20\text{ mA}$ | | $\Delta\lambda$ | - | 17 | - | |
| Forward voltage per segment | $I_F = 20\text{ mA}$ | | V_F | - | 2.0 | 2.6 | V |
| Reverse current per segment ⁽²⁾ | $V_R = 5\text{ V}$ | | I_R | - | - | 100 | μA |
| Luminous intensity matching ratio | $I_F = 10\text{ mA}$ | | I_{V-m} | - | - | 2:1 | |

Notes

- (1) Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
(2) Reverse voltage is only for IR test. It can not continue to operate at this situation.
(3) Cross talk specification $\leq 2.5\%$.

OPTICAL AND ELECTRICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)
VDMY10A1, YELLOW

| PARAMETER | TEST CONDITION | PART | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|--|----------------------|----------|-----------------|------|--------|------|----------------|
| Luminous intensity ⁽¹⁾ | $I_F = 1\text{ mA}$ | VDMY10A1 | I_V | 450 | 1600 | - | μcd |
| | $I_F = 10\text{ mA}$ | VDMY10A1 | I_V | - | 17 600 | - | μcd |
| Dominant wavelength | $I_F = 20\text{ mA}$ | VDMY10A1 | λ_d | - | 587 | - | nm |
| Peak emission wavelength | $I_F = 20\text{ mA}$ | | λ_p | - | 588 | - | nm |
| Spectral line half-width | $I_F = 20\text{ mA}$ | | $\Delta\lambda$ | - | 15 | - | |
| Forward voltage per segment | $I_F = 20\text{ mA}$ | | V_F | - | 2.0 | 2.6 | V |
| Reverse current per segment ⁽²⁾ | $V_R = 5\text{ V}$ | | I_R | - | - | 100 | μA |
| Luminous intensity matching ratio | $I_F = 10\text{ mA}$ | | I_{V-m} | - | - | 2:1 | |

Notes

- (1) Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
(2) Reverse voltage is only for IR test. It can not continue to operate at this situation.
(3) Cross talk specification $\leq 2.5\%$.



| OPTICAL AND ELECTRICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified) | | | | | | | |
|--|----------------------|----------|-----------------|------|------|------|----------------|
| VDMG10A1, GREEN | | | | | | | |
| PARAMETER | TEST CONDITION | PART | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| Luminous intensity ⁽¹⁾ | $I_F = 1\text{ mA}$ | VDMG10A1 | I_V | 110 | 500 | - | μcd |
| | $I_F = 10\text{ mA}$ | VDMG10A1 | I_V | - | 5500 | - | μcd |
| Dominant wavelength | $I_F = 20\text{ mA}$ | VDMG10A1 | λ_d | - | 572 | - | nm |
| Peak emission wavelength | $I_F = 20\text{ mA}$ | | λ_p | - | 571 | - | nm |
| Spectral line half-width | $I_F = 20\text{ mA}$ | | $\Delta\lambda$ | - | 15 | - | |
| Forward voltage per segment | $I_F = 20\text{ mA}$ | | V_F | - | 2.0 | 2.6 | V |
| Reverse current per segment ⁽²⁾ | $V_R = 5\text{ V}$ | | I_R | - | - | 100 | μA |
| Luminous intensity matching ratio | $I_F = 10\text{ mA}$ | | I_{V-m} | - | - | 2:1 | |

Notes

- ⁽¹⁾ Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- ⁽²⁾ Reverse voltage is only for IR test. It can not continue to operate at this situation.
- ⁽³⁾ Cross talk specification $\leq 2.5\%$.

| LUMINOUS INTENSITY CLASSIFICATION | | |
|--|------------------------------------|--------|
| GROUP | LIGHT INTENSITY (μcd) | |
| | MIN. | MAX. |
| D | 110 | 220 |
| E | 180 | 360 |
| F | 280 | 560 |
| G | 450 | 900 |
| H | 700 | 1400 |
| I | 1100 | 2200 |
| K | 1800 | 3600 |
| L | 2800 | 5600 |
| M | 4500 | 9000 |
| N | 7000 | 14 000 |
| P | 11 000 | 22 000 |
| Q | 18 000 | 36 000 |
| R | 28 000 | 56 000 |
| S | 45 000 | 90 000 |

Note

- The above type numbers represent the order groups which include only a few brightness groups. Only one group will be shipped in one tube (there will be no mixing of two groups in one tube). In order to ensure availability, single brightness groups will not be orderable.

| COLOR CLASSIFICATION | | | | | | |
|-----------------------------|-------------|------|--------|------|-------|------|
| GROUP | SOFT ORANGE | | YELLOW | | GREEN | |
| | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |
| 1 | 598 | 601 | 581 | 584 | - | - |
| 2 | 600 | 603 | 583 | 586 | - | - |
| 3 | 602 | 605 | 585 | 588 | 562 | 565 |
| 4 | 604 | 607 | 587 | 590 | 564 | 567 |
| 5 | 606 | 609 | 589 | 592 | 566 | 569 |
| 6 | 608 | 611 | 591 | 594 | 568 | 571 |
| 7 | - | - | - | - | 570 | 573 |
| 8 | - | - | - | - | 572 | 575 |

Note

- Wavelengths are tested at a current pulse duration of 25 ms.

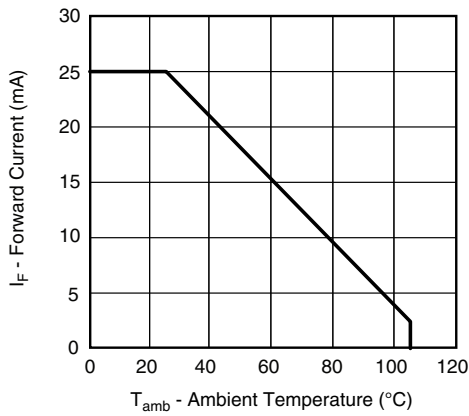
TYPICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)


Fig. 1 - Forward Current vs. Ambient Temperature

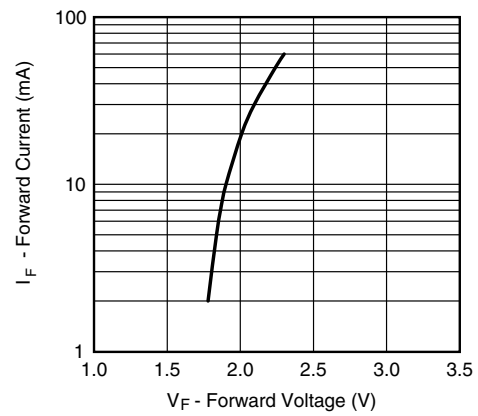


Fig. 4 - Forward Current vs. Forward Voltage

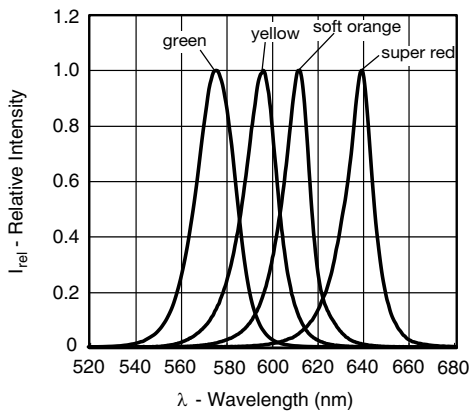


Fig. 2 - Relative Intensity vs. Wavelength

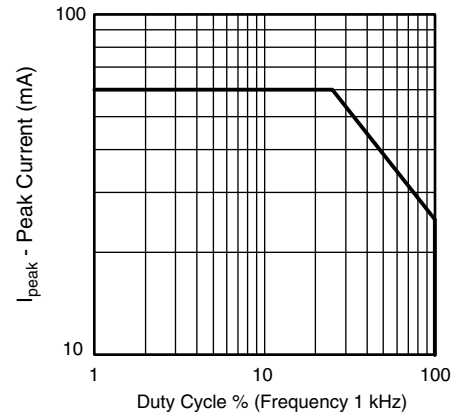


Fig. 5 - Peak Current vs. Duty Cycle


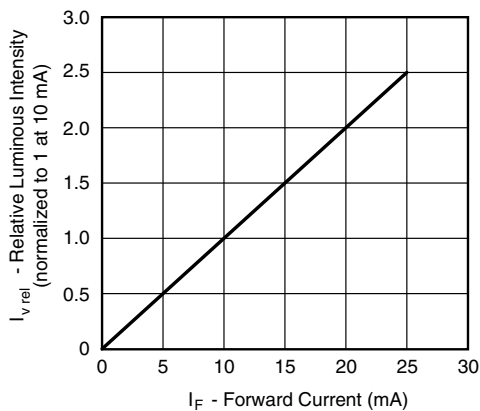



Fig. 3 - Relative Luminous Intensity vs. Forward Current




PACKAGE DIMENSIONS in millimeters

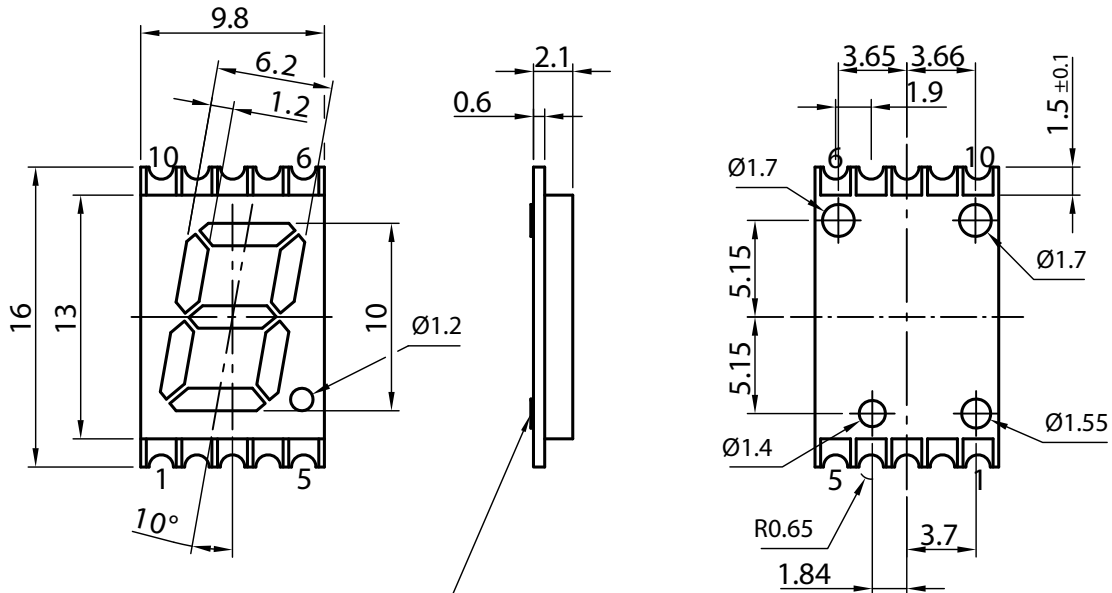

Plastic pins' burr max. 0.14 mm

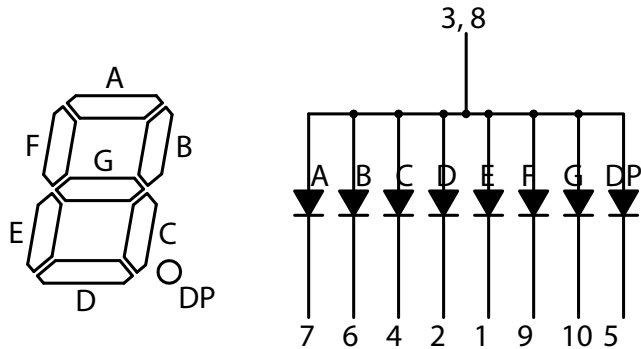

| No. | Connection |
|-----|--------------|
| 1 | Cathode E |
| 2 | Cathode D |
| 3 | Common Anode |
| 4 | Cathode C |
| 5 | Cathode DP |
| 6 | Cathode B |
| 7 | Cathode A |
| 8 | Common Anode |
| 9 | Cathode F |
| 10 | Cathode G |



technical drawings according to DIN specifications


Tolerances are ± 0.25 mm unless otherwise mentioned

Drawing-No.: 6.544-5426.01-4

Issue: 2; 02.10.13



TAPE AND REEL DIMENSIONS in millimeters

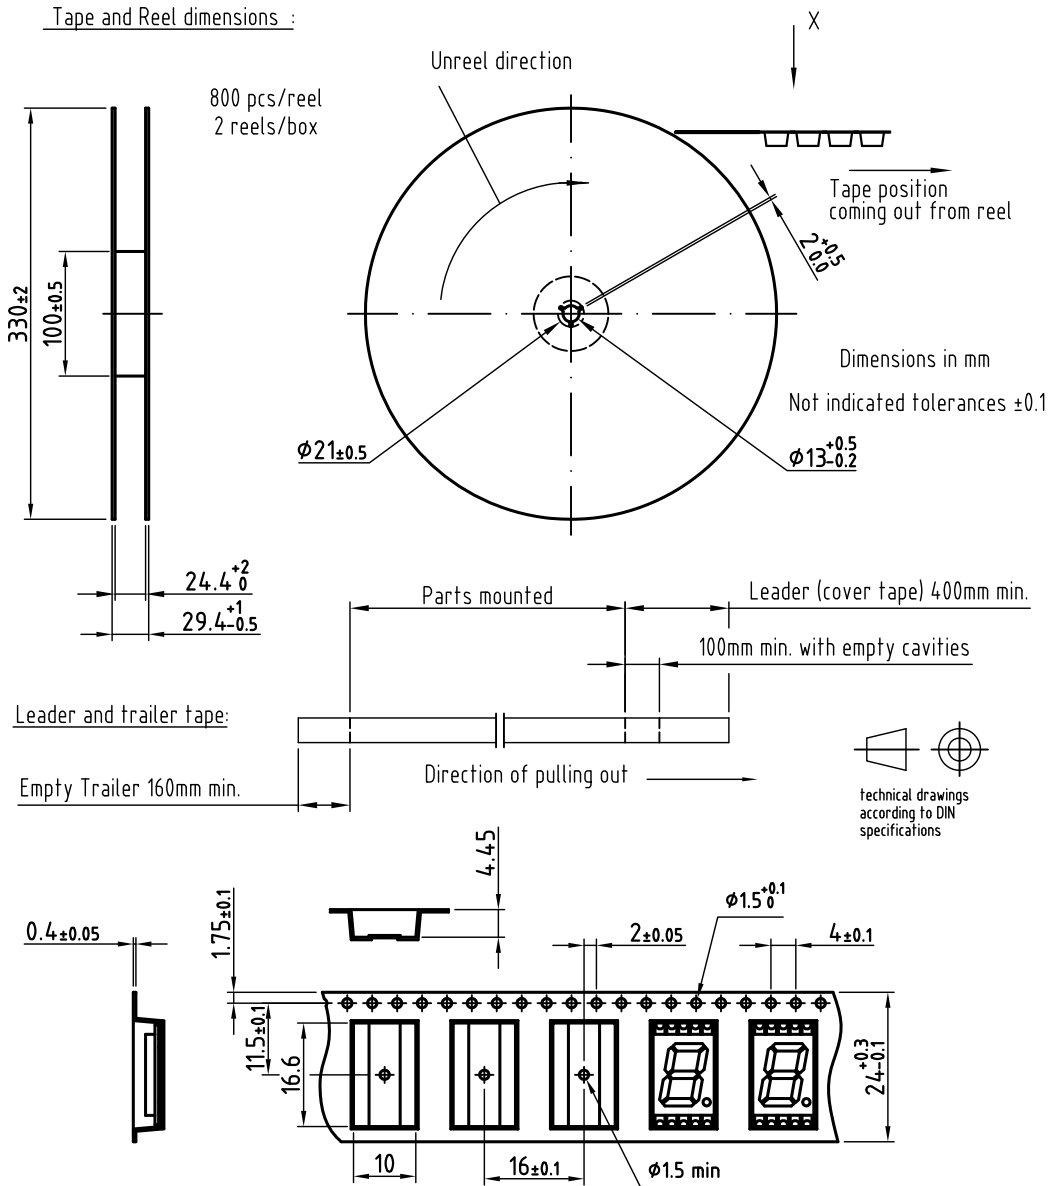


Drawing refers to following types: VDMx10x

Drawing-No.: 9.800-5125.01-4

Reel dimensions and tape

Issue: prel; 10.04.13

TAPE IN BOX

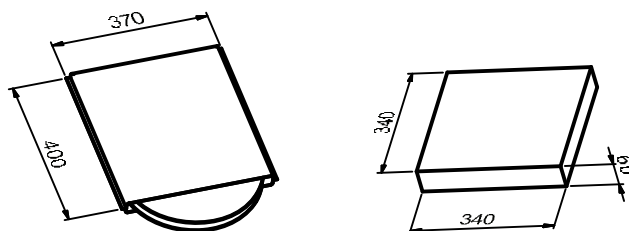



BAR CODE PRODUCT LABEL (example only)



- A) 2D barcode
- B) Vishay part number
- C) Quantity
- D) PTC = selection code (binning)
- E) Code of manufacturing plant
- F) Batch = date code: year/week/plant code
- G) Region code
- H) SL = sales location
- I) Terminations finishing
- K) Lead (Pb)-free symbol
- L) Halogen-free symbol
- M) RoHS symbol

SOLDERING PROFILE




19470-5 max. 2 cycles allowed


Fig. 6 - Vishay Lead (Pb)-free Reflow Soldering Profile (acc. to J-STD-020C)

| SOLDERING IRON (one time only) | |
|---------------------------------------|-------------|
| Temperature | 300 °C max. |
| Soldering time | 3 s max. |

RECOMMENDED SOLDER PAD

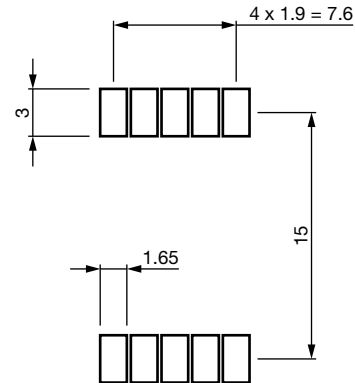

MSL LABEL

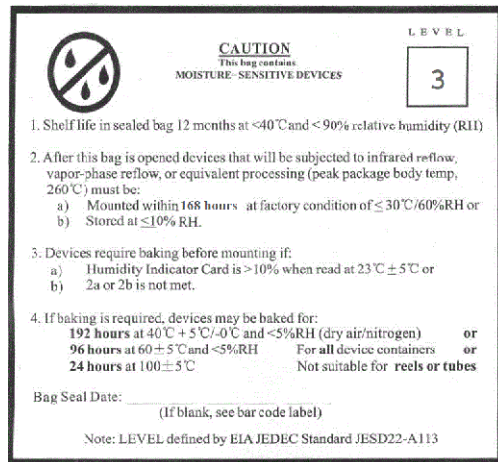



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Displays & Accessories](#) category:

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[LTC-2721WC](#) [LTC-4624JD](#) [LTC-4627WC](#) [LTC-571P](#) [LTD-5021AWC](#) [LTM-8522G](#) [LTP-4323P](#) [LTP-747G](#) [LTS-3361JG-06](#) [ELS-316SYGWA/S530-E2](#) [1668](#) [HT-F196NB-5323](#) [IPD2131-27](#) [SA03-12EWA](#) [LDQ-N514RI](#) [LDS-A3506RD](#) [LDS-A3926RI](#) [SC03-12HDB](#) [SI-B9T151550WW](#) [SI-B9V171550WW](#) [SLC-3PF-WL](#) [SLDN-32M-G](#) [1624](#) [LTC-2623WC](#) [LTC-4627JD](#) [LTD-322G](#) [LTD-482PC](#) [LTP-1057AHR](#) [LTP-1457AKR](#) [LTP-3784G-01](#) [LTS-313AP](#) [LTS-4812SKR-P](#) [LTS-547AE](#) [LTS-6780P](#) [446010401-3](#) [DA43-11GWA](#) [LDD-A516RI-17](#) [LDD-E305RI](#) [LDQ-N3402RI](#) [LDQ-N3606RI](#) [LDT-M2804RI](#) [86004CB830](#) [LTP-3862JD](#) [LTD-6740P](#) [LTS-6880Y](#) [LDS-SMC3002RISUGTR](#) [LTC-2623E](#) [CC25-12YWA](#) [LDM-6432-P3-UR-1](#) [SR420312N/32](#)