


Multilayer Ceramic Chip Capacitors



GENERAL SPECIFICATIONS

Note: Electrical characteristics at + 25 °C unless otherwise specified

Capacitance Range: 1.0 pF to 0.056 µF

Temperature Coefficient of Capacitance (TCC):

0 ± 30 ppm/°C from - 55 °C to + 125 °C

Dissipation Factor (DF):

0.1 % maximum at 1.0 V_{rms} and 1 kHz for values > 1000 pF

0.1 % maximum at 1.0 V_{rms} and 1 MHz for values ≤ 1000 pF

Insulation Resistance (IR):

At + 25 °C and rated voltage 100 000 MΩ minimum or
1000 ΩF, whichever is less

At + 125 °C and rated voltage 10 000 MΩ minimum or
100 ΩF, whichever is less

FEATURES

- C0G is an ultra-stable dielectric offering a Temperature Coefficient of Capacitance (TCC) of 0 ± 30 ppm/°C
- Low Dissipation Factor (DF)
- Ideal for critical timing and tuning applications
- Ideal for snubber and surge suppression applications
- Protective surface coating of high voltage capacitors maybe required to prevent surface arcing.



Dielectric Withstanding Voltage (DWV):

This is the maximum voltage the capacitors are tested for a 1 to 5 second period and the charge/discharge current does not exceed 50 mA

≤ 200 Vdc : DWV at 250 % of rated voltage

500 Vdc: DWV at 200 % of rated voltage

630/1000 Vdc: DWV at 150 % of rated voltage

3000 Vdc: DWV at 120 % of rated voltage

ORDERING INFORMATION

VJ0805 ³⁾	A	102	K	X	A	A	T	### ²⁾
CASE CODE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	DC VOLTAGE RATING ¹⁾	MARKING	PACKAGING	PROCESS CODE
0402	A = C0G (NP0)	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. An "R" indicates a decimal point. Examples: 102 = 1000 pF 1R8 = 1.8 pF	B = ± 0.10 pF C = ± 0.25 pF D = ± 0.5 pF F = ± 1 % G = ± 2 % J = ± 5 % K = ± 10 % Note: B, C, D < 10 pF F, G, J, K ≥ 10 pF	X = Ni barrier 100 % tin plated F = AgPd	X = 25 V A = 50 V B = 100 V C = 200 V E = 500 V L = 630 V G = 1000 V H = 3000 V	A = Unmarked M = Marked NOTE: Marking is only available for 0805 and 1206	T = 7" reel/plastic tape C = 7" reel/paper tape R = 11 1/4" reel/plastic tape P = 11 1/4" reel/paper tape O = 7" reel/flamed paper tape I = 11 1/4"/13" reel/flamed paper tape Note: "I" and "O" is used for "F" termination paper taped	
0603								
0805								
1206								
1210								
1808								
1812								
1825								
2220								
2225								

Note

1. DC voltage rating should not be exceeded in application

2. Process Code may be added with up to three digits, used to control non-standard products and/or special requirements

3. Case size designator may be replaced by a four digit drawing number used to control non-standard products and/or requirements

VJ C0G (NP0)

Vishay Vitramon

Multilayer Ceramic Chip Capacitors



COG (NP0) DIELECTRIC

STYLE		VJ0402			VJ0603			VJ0805				VJ1206					VJ1210 ¹⁾					
EIA TYPE		0402			0603			0805				1206					1210					
VOLTAGE (Vdc)		25	50	100	50	100	200	50	100	200	500	50	100	200	500	630	50	100	200	500	630	
CAP. CODE	CAP.																					
1R0	1.0 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
1R2	1.2 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
1R5	1.5 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
1R8	1.8 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
2R2	2.2 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
2R7	2.7 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
3R3	3.3 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
3R9	3.9 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
4R7	4.7 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
5R6	5.6 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
6R8	6.8 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
8R2	8.2 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
100	10 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
120	12 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
150	15 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
180	18 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
220	22 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
270	27 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
330	33 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
390	39 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
470	47 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
560	56 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
680	68 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
820	82 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
101	100 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
121	120 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
151	150 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
181	180 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
221	220 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
271	270 pF				••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
331	330 pF				••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
391	390 pF				••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
471	470 pF				••			••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
561	560 pF				••			••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
681	680 pF				••			••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
821	820 pF				••			••	••	••	•	•	•	•	•	•	•	•	•	•	•	•
102	1000 pF							••	••			•	•	•	•	•	•	•	•	•	•	•
122	1200 pF								•	•			•	•	•	•	•	•	•	•	•	•
152	1500 pF									•			•	•	•	•	•	•	•	•	•	•
182	1800 pF												•	•	•	•	•	•	•	•	•	•
222	2200 pF												•	•	•	•	•	•	•	•	•	•
272	2700 pF												•	•	•	•	•	•	•	•	•	•
332	3300 pF												•	•	•	•	•	•	•	•	•	•
392	3900 pF												•	•	•	•	•	•	•	•	•	•
472	4700 pF												•	•	•	•	•	•	•	•	•	•
562	5600 pF												•									
682	6800 pF												•									
822	8200 pF												•									
103	0.010 µF													•								
123	0.012 µF														•							
153	0.015 µF																					
183	0.018 µF																					
223	0.022 µF																					
273	0.027 µF																					
333	0.033 µF																					
393	0.039 µF																					
473	0.047 µF																					
563	0.056 µF																					

Note

1. See soldering recommendations within this data book, or visit www.vishay.com/doc?45034

• Available only in paper tape










COG (NP0) DIELECTRIC																									
STYLE		VJ1808 ¹⁾					VJ1812 ¹⁾					VJ1825 ¹⁾				VJ2220 ¹⁾				VJ2225 ¹⁾					
EIA TYPE		-					1812					1825				-				-					
VOLTAGE (VDC)		50	100	200	500	1000	50	100	200	500	1000	3000	50	100	200	500	50	100	200	500	1000	50	100	200	500
CAP. CODE	CAP.																								
1R0	1.0 pF																								
1R2	1.2 pF																								
1R5	1.5 pF																								
1R8	1.8 pF																								
2R2	2.2 pF																								
2R7	2.7 pF																								
3R3	3.3 pF																								
3R9	3.9 pF																								
4R7	4.7 pF																								
5R6	5.6 pF																								
6R8	6.8 pF																								
8R2	8.2 pF																								
100	10 pF																								
120	12 pF																								
150	15 pF																								
180	18 pF																								
220	22 pF																								
270	27 pF																								
330	33 pF																								
390	39 pF																								
470	47 pF																								
560	56 pF																								
680	68 pF																								
820	82 pF																								
101	100 pF																								
121	120 pF																								
151	150 pF																								
181	180 pF																								
221	220 pF																								
271	270 pF																								
331	330 pF																								
391	390 pF																								
471	470 pF																								
561	560 pF																								
681	680 pF																								
821	820 pF																								
102	1000 pF																								
122	1200 pF																								
152	1500 pF																								
182	1800 pF																								
222	2200 pF																								
272	2700 pF																								
332	3300 pF																								
392	3900 pF																								
472	4700 pF																								
562	5600 pF																								
682	6800 pF																								
822	8200 pF																								
103	0.010 µF																								
123	0.012 µF																								
153	0.015 µF																								
183	0.018 µF																								
223	0.022 µF																								
273	0.027 µF																								
333	0.033 µF																								
393	0.039 µF																								
473	0.047 µF																								
563	0.056 µF																								

Note


1. See soldering recommendations within this data book, or visit www.vishay.com/doc?45034

C0G (NP0) DIELECTRIC - TYPICAL PARAMETERS

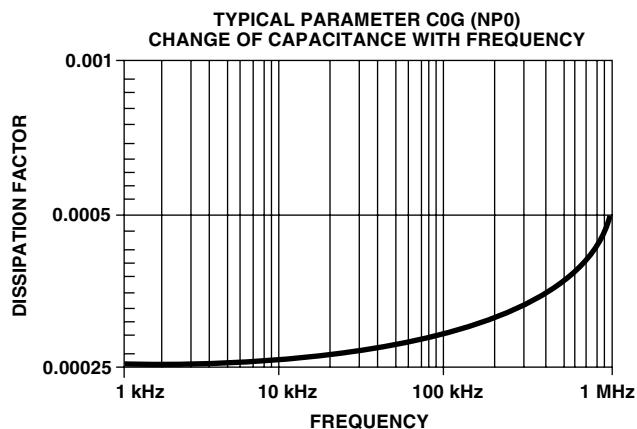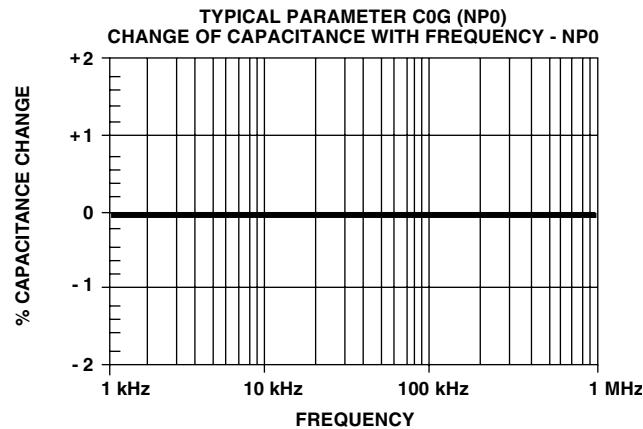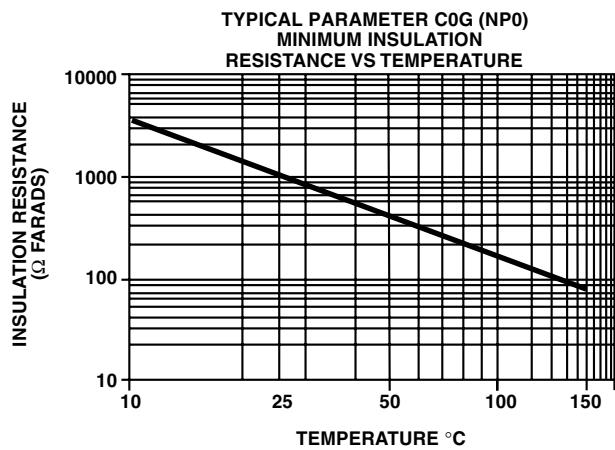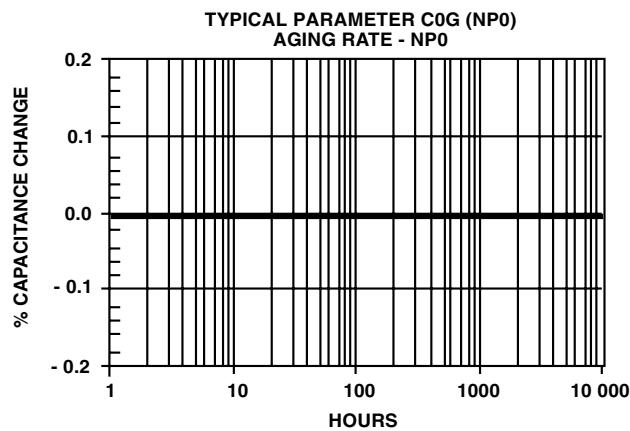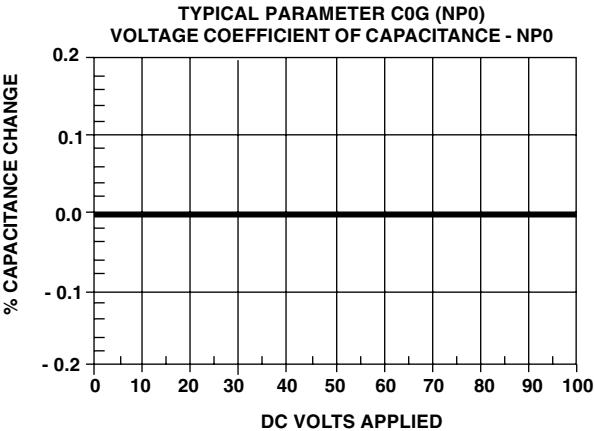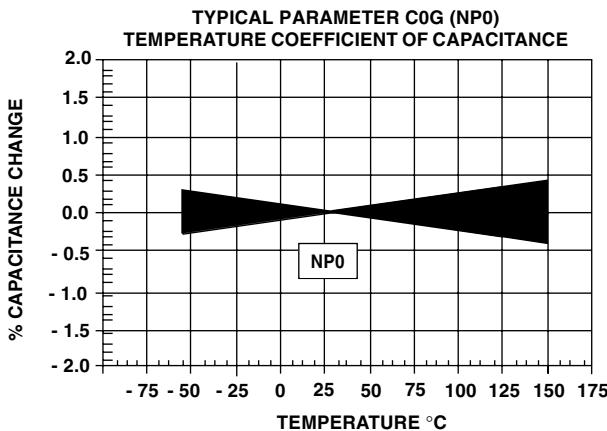

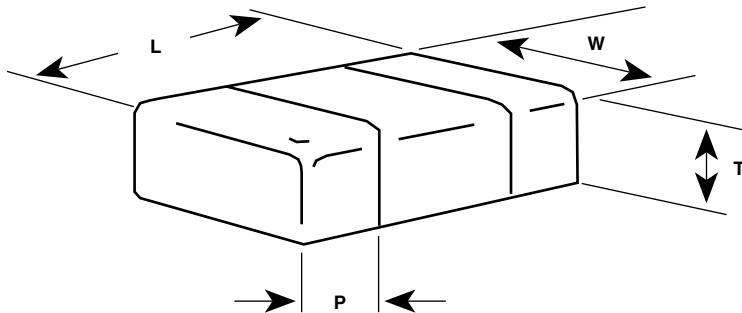DIMENSIONS in inches [millimeters]


EIA STYLE	VISHAY VITRAMON STYLE DESIGNATION	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATION (P)	
					(Min.)	(Max.)
0402	VJ0402	0.040 + 0.004/- 0.002 [1.00 + 0.10/- 0.05]	0.020 + 0.004/- 0.002 [0.50 + 0.10/- 0.05]	0.024 [0.60]	0.004 [0.10]	0.016 [0.41]
0603	VJ0603	0.063 ± 0.005 [1.60 ± 0.12]	0.031 ± 0.005 [0.80 ± 0.12]	0.036 [0.92]	0.012 [0.30]	0.018 [0.46]
-	VJ0612	0.063 ± 0.008 [1.60 ± 0.20]	0.126 ± 0.008 [3.20 ± 0.20]	0.067 [1.70]	0.010 [0.25]	0.018 [0.46]
-	VJ0508	0.049 ± 0.008 [1.25 ± 0.20]	0.079 ± 0.008 [2.00 ± 0.20]	0.042 [1.07]	0.005 [0.13]	0.018 [0.46]
0805	VJ0805	0.079 ± 0.008 [2.00 ± 0.20]	0.049 ± 0.008 [1.25 ± 0.20]	0.057 [1.45]	0.010 [0.25]	0.028 [0.71]
1206	VJ1206	0.126 ± 0.008 [3.20 ± 0.20]	0.063 ± 0.008 [1.60 ± 0.20]	0.067 [1.70]	0.010 [0.25]	0.028 [0.71]
1210	VJ1210	0.126 ± 0.008 [3.20 ± 0.20]	0.098 ± 0.008 [2.50 ± 0.20]	0.067 [1.70]	0.010 [0.25]	0.028 [0.71]
-	VJ1808	0.177 ± 0.010 [4.50 ± 0.25]	0.080 ± 0.010 [2.03 ± 0.25]	0.067 [1.70]	0.010 [0.25]	0.030 [0.76]
1812	VJ1812	0.177 ± 0.010 [4.50 ± 0.25]	0.126 ± 0.008 [3.20 ± 0.20]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
1825	VJ1825	0.177 ± 0.010 [4.50 ± 0.25]	0.252 ± 0.010 [6.40 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
-	VJ2220	0.220 ± 0.008 [5.59 ± 0.20]	0.200 ± 0.010 [5.08 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
-	VJ2225	0.220 ± 0.010 [5.59 ± 0.25]	0.250 ± 0.010 [6.35 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
-	VJ3640	0.360 ± 0.015 [9.14 ± 0.38]	0.400 ± 0.015 [10.20 ± 0.38]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]

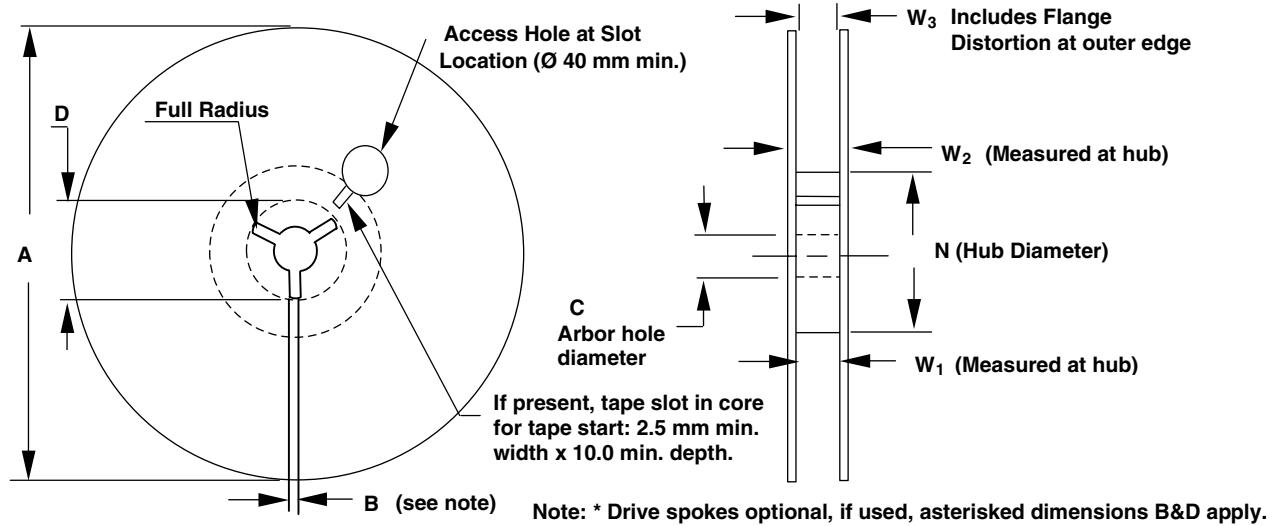
REEL DIMENSIONS in inches (millimeters)

TAPE SIZE	A MAX.	B MIN.	C	D MIN.	N MIN.	W ₁	W ₂ MAX.	W ₃
8 mm	12.992 (330)	0.059 (1.5)	0.512 + 0.50 - 0.20 (13.0 + 0.50 - 0.20)	0.795 (20.2)	1.969 (50.0)	0.331 + 0.059/- 0.0 (8.4 + 1.5/- 0.0)	0.567 (14.4)	Shall accommodate tape width without interference
12 mm						0.488 + 0.079/- 0.0 (12.4 + 2.0/- 0.0)	0.724 (18.4)	
16 mm					2.401 (61.0)	0.646 + 0.0789/- 0.0 (16.4 + 2.0/- 0.0)	0.882 (22.4)	

Note

- For reels less than 360 mm diameter (A), the most widely used reel diameters are 178 mm ± 2 mm and 330 mm ± 2 mm. Reel diameters ranging from 254 mm to 292 mm also exist. Commonly used hub diameters are 80, 100, 150 and 178 mm.
- Tape with components must wrap around hub without damage.

STANDARD PACKAGING QUANTITIES 1/2

		7" REEL QUANTITIES		11 1/4" AND 13" REEL QUANTITIES	
BODY SIZE	TAPE SIZE	PAPER TAPE PACKAGING CODE "C"/"O" ⁴⁾	PLASTIC TAPE PACKAGING CODE "T"	PAPER TAPE PACKAGING CODE "P"/"I" ⁴⁾	PLASTIC TAPE PACKAGING CODE "R"
0402 ³⁾	8 mm	5000/10 000	N/A	10 000/30 000	N/A
0603	8 mm	4000	4000	10 000	N/A
0805 ⁴⁾	8 mm	3000	3000	10 000	10 000
1206 ⁵⁾	8 mm	N/A	3000	N/A	10 000
1210 ⁵⁾	8 mm	N/A	3000	N/A	10 000
1808	12 mm	N/A	3000	N/A	10 000
1812	12 mm	N/A	1000	N/A	5000
1825	12 mm	N/A	1000	N/A	4000
2220	12 mm	N/A	1000	N/A	4000
2225	12 mm	N/A	1000	N/A	4000
3640	16 mm	N/A	500	N/A	2000

Note

- REFERENCE: EIA Standard RS 481 – “Taping of Surface Mount Components for Automatic Placement”
- N/A = Not Available, not supported anymore
- Quantity can vary with customer request
- Flamed paper tape code "O" (7" reel) and "I" (11 1/4/13" reel) for AgPd terminated parts (termination code F)
- Packaging "C/P" or "T/R" and quantity can depend from product thickness


EMBOSSSED 8, 12 AND 16 MM CARRIER TAPE


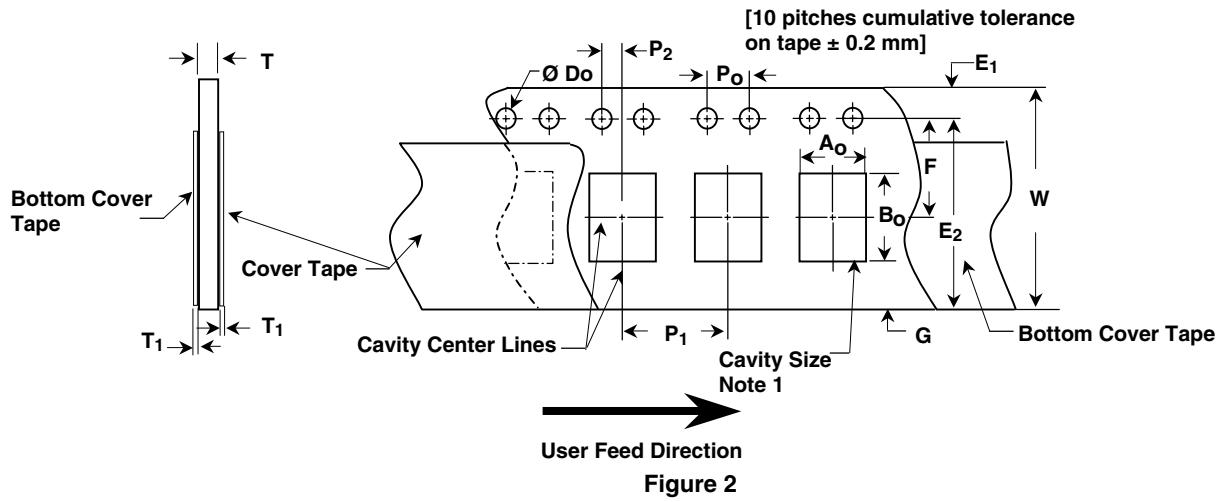
Figure 1

CONSTANT CARRIER TAPE METRIC DIMENSIONS in inches (millimeters)							
TAPE SIZE	D ₀	E ₁	P ₀	P ₂	S ₁ MIN.	T MAX.	T ₁
8 mm and 12 mm	0.059 + 0.004/- 0.0 (1.50 + 0.10/- 0.0)	0.069 + 0.004 (1.75 ± 0.10)	0.175 + 0.004 (4.0 ± 0.10)	0.079 + 0.002 (2.0 ± 0.05)	0.024 (0.60)	0.024) (0.60)	0.004 (0.10) Max.

VARIABLE CARRIER TAPE METRIC DIMENSIONS in inches (millimeters)									
TAPE SIZE	B ₁ MAX.	D ₁ MIN.	E ₂ MIN.	F	P ₁	R MIN.	T ₂	W MAX.	A ₀ , B ₀ AND K ₀
8 mm 2 mm Pitch	0.171 (4.35)	0.177 (0.450)	0.246 (6.25)	0.138 ± 0.002 (3.50 ± 0.05)	0.79 ± 0.004 (2.00 ± 0.10)	0.984 (25.0)	0.098 (2.50) Max.	0.327 (8.30)	see note 1
8 mm 4 mm Pitch	0.171 (4.35)	0.177 (0.450)	0.246 (6.25)	0.138 ± 0.002 (3.50 ± 0.05)	0.157 ± 0.004 (4.00 ± 0.10)	0.984 (25.0)	0.098 (2.50) Max.	0.327 (8.30)	see note 1
12 mm 2 mm Pitch	0.323 (8.20)	0.059 (0.150)	0.404 (10.25)	0.217 ± 0.002 (5.50 ± 0.05)	0.157 ± 0.004 (4.00 ± 0.10)	1.181 (30.0)	0.256 (6.50) Max.	0.484 (12.30)	see note 1
16 mm 4 mm Pitch	0.476 (12.1)	0.059 (0.150)	0.561 (14.25)	0.295 ± 0.004 (7.50 ± 0.1)	0.157 ± 0.004 (4.00 ± 0.10)	1.181 (30.0)	0.341 (8.0) Max.	0.641 (16.3)	see note 1

Note

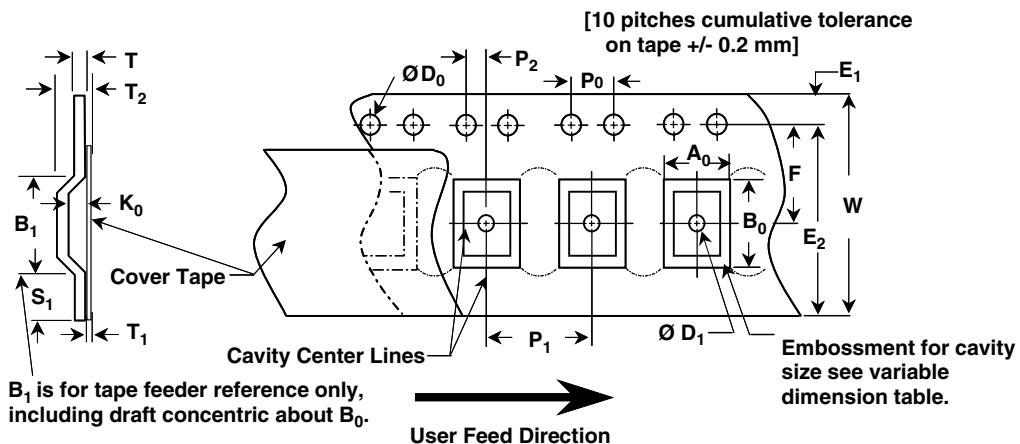1. The cavity defined by A₀, B₀ and K₀ shall surround the component with sufficient clearance that:
 - a) The component does not protrude above the top surface of the carrier tape.
 - b) The component can be removed from the cavity in a vertical direction without mechanical restriction, after the cover tape has been removed.
 - c) Rotation of the component is limited to 20° maximum for 8 and 12 mm tapes and 10° maximum for 16 mm figure 3 & 4.
 - d) Lateral movement of the component is restricted to 0.5 mm maximum for 8 mm and 12mm wide tape and to 1.0 mm maximum for 16 mm wide tape figure 5.

PAPER 8 MM CARRIER TAPE**CONSTANT CARRIER TAPE METRIC DIMENSIONS** in inches (millimeters)

TAPE SIZE	D ₀	E ₁	P ₀	P ₂	T _{1 MAX.}	G MIN.	R REF.
8 mm	0.059 + 0.004/- 0.0 (1.50 + 0.10/- 0.0)	0.069 + 0.004 (1.75 ± 0.10)	0.175 + 0.004 (4.0 ± 0.10)	0.079 + 0.002 (2.0 ± 0.05)	0.024 (0.60)	0.029 (0.75)	0.010 (0.25)

VARIABLE CARRIER TAPE METRIC DIMENSIONS in inches (millimeters)

TAPE SIZE	E _{2 MIN.}	F	P ₁	W MAX.	A ₀ , B ₀ AND K ₀	T
8 mm 2 mm Pitch	0.246 (6.25)	0.138 ± 0.002 (3.50 ± 0.05)	0.79 ± 0.004 (2.00 ± 0.10)	0.327 (8.30)	see note 1	1.1 mm maximum for paper base tape
8 mm 4 mm Pitch	0.246 (6.25)	0.138 ± 0.002 (3.50 ± 0.05)	0.157 ± 0.004 (4.00 ± 0.10)	0.327 (8.30)	see note 1	1.1 mm maximum for paper base tape

Note

1. The cavity defined by A₀, B₀ and K₀ shall surround the component with sufficient clearance that:
 - a) The component does not protrude above the top surface of the carrier tape.
 - b) The component can be removed from the cavity in a vertical direction without mechanical restriction, after the cover tape has been removed.
 - c) Rotation of the component is limited to 20° maximum for 8 and 12 mm tapes and 10° maximum for 16 mm figure 3 & 4.
 - d) Lateral movement of the component is restricted to 0.5 mm maximum for 8 mm and 1.2mm wide tape and to 1.0 mm maximum for 16 mm wide tape figure 5.

MAXIMUM COMPONENT ROTATION FOR PUNCHED AND EMBOSSED CARRIER

Figure 3 Maximum Lateral Movement Carrier Top View


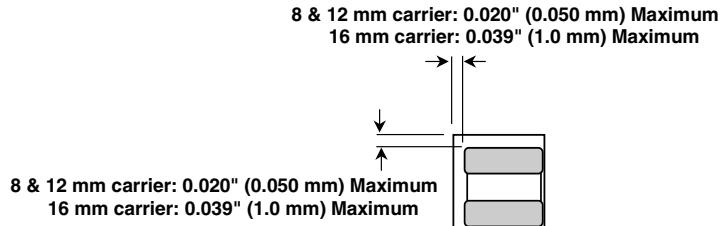


Figure 4

Maximum Component Rotation Embossed Carrier Side View




Maximum Component Rotation Paper Carrier Side View




MAXIMUM LATERAL MOVEMENT FOR PUNCHED AND EMBOSSED CARRIER

Figure 5 Maximum Component Rotation Top View

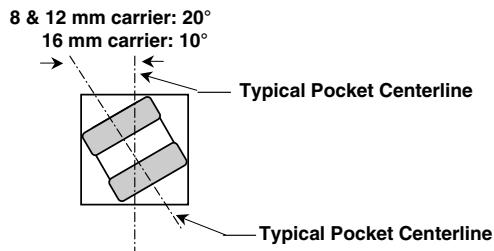

BENDING RADIUS FOR PUNCHED EMBOSSED CARRIER

Embossed Carrier
Bending Radius See note 1

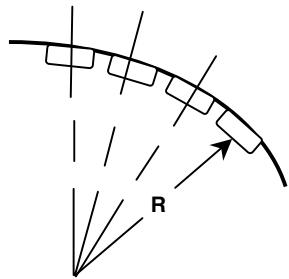

Punched Carrier Bending
Radius See note 1

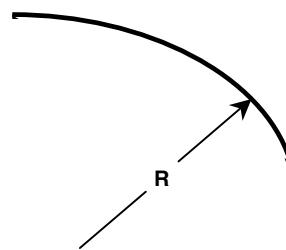


Figure 6

Note 1: The tape with or without components shall pass without damage round "R", see dimensions table

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Multilayer Ceramic Capacitors MLCC - SMD/SMT category:

Click to view products by Vishay manufacturer:

Other Similar products are found below :

[D55342E07B523DR-T/R](#) [NCA1206X7R103K50TRPF](#) [NCA1206X7R104K16TRPF](#) [NIN-FB391JTRF](#) [NIN-FC2R7JTRF](#)
[NMC0402NPO220J50TRPF](#) [NMC0402X5R105K6.3TRPF](#) [NMC0402X5R224K6.3TRPF](#) [NMC0402X7R103J25TRPF](#)
[NMC0402X7R153K16TRPF](#) [NMC0603NPO330G50TRPF](#) [NMC0603NPO331F50TRPF](#) [NMC0603X5R475M6.3TRPF](#)
[NMC0805NPO270J50TRPF](#) [NMC0805NPO681F50TRPF](#) [NMC0805NPO820J50TRPF](#) [NMC0805X7R224K25TRPF](#)
[NMC1206X7R102K50TRPF](#) [NMC1210Y5V105Z50TRPLPF](#) [NMC-H0805X7R472K250TRPF](#) [NMC-L0402NPO7R0C50TRPF](#) [NMC-L0603NPO2R2B50TRPF](#) [NMC-Q0402NPO8R2D200TRPF](#) [C1206C101J1GAC](#) [C1608C0G2A221J](#) [C1608X7R1E334K](#) [C2012C0G2A472J](#)
[2220J2K00562KXT](#) [KHC201E225M76N0T00](#) [1812J2K00332KXT](#) [CCR06CG153FSV](#) [CDR14BP471CJUR](#) [CDR31BX103AKWR](#)
[CDR33BX683AKUS](#) [CGA2B2C0G1H010C](#) [CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#)
[CGA2B2C0G1H120J](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#) [CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H390J](#) [CGA2B2C0G1H391J](#)
[CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2C0G1H820J](#) [CGA2B2X8R1H152K](#)