


Surface Mount Multilayer Ceramic Chip Capacitors for Commercial Applications



FEATURES

- C0G is an ultra-stable dielectric offering a Temperature Coefficient of Capacitance (TCC) of 0 ± 30 ppm/°C
- Low Dissipation Factor (DF)
- Ideal for critical timing and tuning applications
- Ideal for snubber and surge suppression applications
- Protective surface coating of high voltage capacitors maybe required to prevent surface arcing.
- Surface mount, precious metal technology, wet build process



ELECTRICAL SPECIFICATIONS

Note: Electrical characteristics at + 25 °C unless otherwise specified

Operating Temperature: - 55 °C to + 125 °C

Capacitance Range: 1.0 pF to 0.056 μ F

Voltage Rating: 10 Vdc to 1000 Vdc

Temperature Coefficient of Capacitance (TCC):
 0 ± 30 ppm/°C from - 55 °C to + 125 °C

Dissipation Factor (DF):
0.1 % maximum at 1.0 V_{rms} and 1 kHz for values > 1000 pF
0.1 % maximum at 1.0 V_{rms} and 1 MHz for values \leq 1000 pF

Aging Rate: 0 % maximum per decade

Insulation Resistance (IR):

At + 25 °C and rated voltage 100 000 M Ω minimum or 1000 Ω F, whichever is less

At + 125 °C and rated voltage 10 000 M Ω minimum or 100 Ω F, whichever is less

Dielectric Withstanding Voltage (DWV):

This is the maximum voltage the capacitors are tested for a 1 to 5 second period and the charge/discharge current does not exceed 50 mA

\leq 200 Vdc : DWV at 250 % of rated voltage

500 Vdc: DWV at 200 % of rated voltage

630/1000 Vdc: DWV at 150 % of rated voltage

3000 Vdc: DWV at 120 % of rated voltage

ORDERING INFORMATION								
VJ0805 ³⁾	A	102	K	X	A	A	T	### ²⁾
CASE CODE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	DC VOLTAGE RATING ¹⁾	MARKING	PACKAGING	PROCESS CODE
0402 0603 0805 1206 1210 1808 1812 1825 2220 2225	A = C0G (NP0)	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. An "R" indicates a decimal point. Examples: 102 = 1000 pF 1R8 = 1.8 pF	B = \pm 0.10 pF C = \pm 0.25 pF D = \pm 0.5 pF F = \pm 1 % G = \pm 2 % J = \pm 5 % K = \pm 10 % Note: B, C, D < 10 pF F, G, J, K \geq 10 pF	X = Ni barrier 100 % tin plated F = AgPd	X = 25 V A = 50 V B = 100 V C = 200 V E = 500 V L = 630 V G = 1000 V H = 3000 V	A = Unmarked M = Marked Note: Marking is only available for 0805 and 1206	T = 7" reel/plastic tape C = 7" reel/paper tape R = 11 1/4" reel/plastic tape P = 11 1/4" reel/paper tape O = 7" reel/flamed paper tape I = 11 1/4"/13" reel/flamed paper tape Note: "I" and "O" is used for "F" termination paper taped	

Notes:


1. DC voltage rating should not be exceeded in application
2. Process Code may be added with up to three digits, used to control non-standard products and/or special requirements
3. Case size designator may be replaced by a four digit drawing number used to control non-standard products and/or requirements

VJ C0G (NP0) Dielectric



Vishay Vitramon Surface Mount Multilayer Ceramic Chip Capacitors
for Commercial Applications

DIMENSIONS in inches [millimeters]

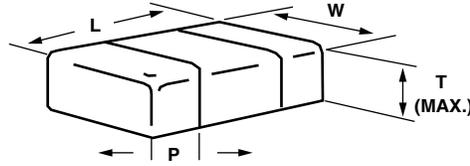

EIA STYLE	PART ORDERING NUMBER	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATION (P)	
					(Min.)	(Max.)
0402	VJ0402	0.040 + 0.004/- 0.002 [1.00 + 0.10/- 0.05]	0.020 + 0.004/- 0.002 [0.50 + 0.10/- 0.05]	0.024 [0.60]	0.004 [0.10]	0.016 [0.41]
0603	VJ0603	0.063 ± 0.005 [1.60 ± 0.12]	0.031 ± 0.005 [0.80 ± 0.12]	0.036 [0.92]	0.012 [0.30]	0.018 [0.46]
0805	VJ0805	0.079 ± 0.008 [2.00 ± 0.20]	0.049 ± 0.008 [1.25 ± 0.20]	0.057 [1.45]	0.010 [0.25]	0.028 [0.71]
1206	VJ1206	0.126 ± 0.008 [3.20 ± 0.20]	0.063 ± 0.008 [1.60 ± 0.20]	0.067 [1.70]	0.010 [0.25]	0.028 [0.71]
1210	VJ1210	0.126 ± 0.008 [3.20 ± 0.20]	0.098 ± 0.008 [2.50 ± 0.20]	0.067 [1.70]	0.010 [0.25]	0.028 [0.71]
-	VJ1808	0.177 ± 0.010 [4.50 ± 0.25]	0.080 ± 0.010 [2.03 ± 0.25]	0.067 [1.70]	0.010 [0.25]	0.030 [0.76]
1812	VJ1812	0.177 ± 0.010 [4.50 ± 0.25]	0.126 ± 0.008 [3.20 ± 0.20]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
1825	VJ1825	0.177 ± 0.010 [4.50 ± 0.25]	0.252 ± 0.010 [6.40 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
-	VJ2220	0.220 ± 0.008 [5.59 ± 0.20]	0.200 ± 0.010 [5.08 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
-	VJ2225	0.220 ± 0.010 [5.59 ± 0.25]	0.250 ± 0.010 [6.35 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]



VJ C0G (NP0) Dielectric

Surface Mount Multilayer Ceramic Chip Capacitors Vishay Vitramon
for Commercial Applications

SELECTION CHART																					
STYLE		VJ0402			VJ0603			VJ0805				VJ1206					VJ1210 ¹⁾				
EIA TYPE		0402			0603			0805				1206					1210				
VOLTAGE (Vdc)		25	50	100	50	100	200	50	100	200	500	50	100	200	500	630	50	100	200	500	630
CAP. CODE	CAP.																				
1R0	1.0 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
1R2	1.2 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
1R5	1.5 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
1R8	1.8 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
2R2	2.2 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
2R7	2.7 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
3R3	3.3 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
3R9	3.9 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
4R7	4.7 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
5R6	5.6 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
6R8	6.8 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
8R2	8.2 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
100	10 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•					
120	12 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	
150	15 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	
180	18 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	
220	22 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	
270	27 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	
330	33 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	
390	39 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	
470	47 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	
560	56 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	•
680	68 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	•
820	82 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	•
101	100 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	•
121	120 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	•
151	150 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	•
181	180 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	•
221	220 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•				•	•
271	270 pF				••	••	••	••	••	••	•	•	•	•	•	•				•	•
331	330 pF				••	••	••	••	••	••	•	•	•	•	•	•				•	•
391	390 pF				••	••	••	••	••	••	•	•	•	•	•	•				•	•
471	470 pF				••	••	••	••	••	••	•	•	•	•	•	•				•	•
561	560 pF				••	••	••	••	••	••	•	•	•	•	•	•				•	•
681	680 pF				••	••	••	••	••	••	•	•	•	•	•	•				•	•
821	820 pF				••	••	••	••	••	••	•	•	•	•	•	•				•	•
102	1000 pF							••	••	••		•	•	•	•	•				•	•
122	1200 pF							•	•	•		•	•	•	•	•				•	•
152	1500 pF							•	•	•		•	•	•	•	•				•	•
182	1800 pF							•	•	•		•	•	•	•	•				•	•
222	2200 pF							•	•	•		•	•	•	•	•				•	•
272	2700 pF							•	•	•		•	•	•	•	•				•	•
332	3300 pF							•	•	•		•	•	•	•	•				•	•
392	3900 pF							•	•	•		•	•	•	•	•				•	•
472	4700 pF							•	•	•		•	•	•	•	•				•	•
562	5600 pF							•	•	•		•	•	•	•	•				•	•
682	6800 pF							•	•	•		•	•	•	•	•				•	•
822	8200 pF							•	•	•		•	•	•	•	•				•	•
103	0.010 μF											•	•	•	•	•				•	•
123	0.012 μF											•	•	•	•	•				•	•
153	0.015 μF											•	•	•	•	•				•	•
183	0.018 μF											•	•	•	•	•				•	•
223	0.022 μF											•	•	•	•	•				•	•
273	0.027 μF											•	•	•	•	•				•	•
333	0.033 μF											•	•	•	•	•				•	•
393	0.039 μF											•	•	•	•	•				•	•
473	0.047 μF											•	•	•	•	•				•	•
563	0.056 μF											•	•	•	•	•				•	•

Note:

- 1. See soldering recommendations within this data book, or visit www.vishay.com/doc?45034
- Available only in paper tape

VJ C0G (NP0) Dielectric



Vishay Vitramon Surface Mount Multilayer Ceramic Chip Capacitors
for Commercial Applications

SELECTION CHART																													
STYLE		VJ1808 ¹⁾					VJ1812 ¹⁾					VJ1825 ¹⁾				VJ2220 ¹⁾					VJ2225 ¹⁾								
EIA TYPE		-					1812					1825				-					-								
VOLTAGE (VDC)		50	100	200	500	1000	50	100	200	500	1000	50	100	200	500	50	100	200	500	1000	50	100	200	500	50	100	200	500	
CAP. CODE	CAP.																												
1R0	1.0 pF																												
1R2	1.2 pF																												
1R5	1.5 pF																												
1R8	1.8 pF																												
2R2	2.2 pF																												
2R7	2.7 pF																												
3R3	3.3 pF																												
3R9	3.9 pF																												
4R7	4.7 pF																												
5R6	5.6 pF																												
6R8	6.8 pF																												
8R2	8.2 pF																												
100	10 pF																												
120	12 pF																												
150	15 pF																												
180	18 pF																												
220	22 pF																												
270	27 pF																												
330	33 pF																												
390	39 pF																												
470	47 pF																												
560	56 pF																												
680	68 pF																												
820	82 pF																												
101	100 pF																												
121	120 pF																												
151	150 pF																												
181	180 pF																												
221	220 pF																												
271	270 pF																												
331	330 pF																												
391	390 pF																												
471	470 pF																												
561	560 pF																												
681	680 pF																												
821	820 pF																												
102	1000 pF																												
122	1200 pF																												
152	1500 pF																												
182	1800 pF																												
222	2200 pF																												
272	2700 pF																												
332	3300 pF																												
392	3900 pF																												
472	4700 pF																												
562	5600 pF																												
682	6800 pF																												
822	8200 pF																												
103	0.010 μF																												
123	0.012 μF																												
153	0.015 μF																												
183	0.018 μF																												
223	0.022 μF																												
273	0.027 μF																												
333	0.033 μF																												
393	0.039 μF																												
473	0.047 μF																												
563	0.056 μF																												

Note:







1. See soldering recommendations within this data book, or visit www.vishay.com/doc?45034



VJ C0G (NP0) Dielectric

Surface Mount Multilayer Ceramic Chip Capacitors Vishay Vitramon
for Commercial Applications

C0G (NP0) DIELECTRIC - TYPICAL PARAMETERS

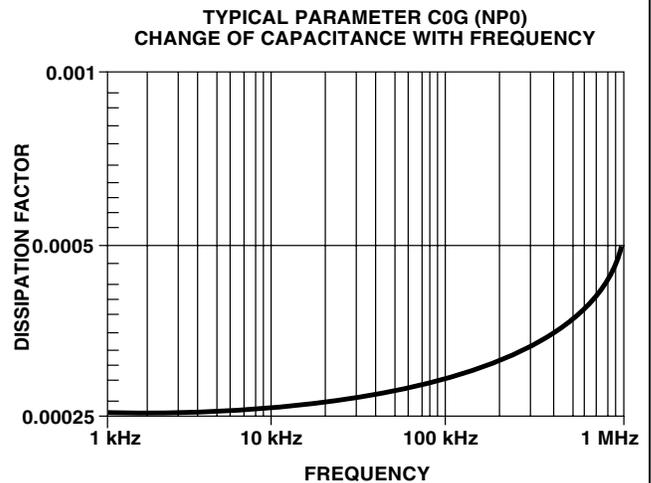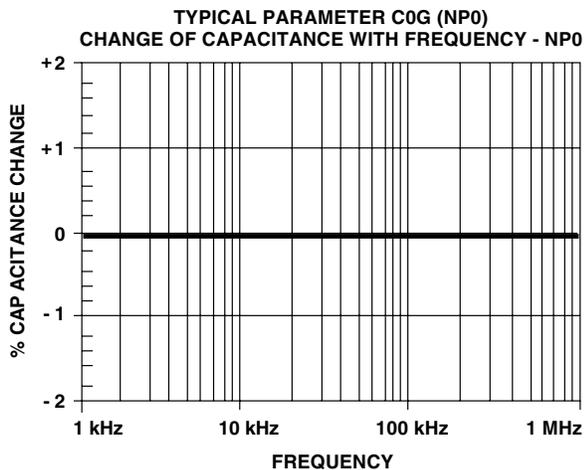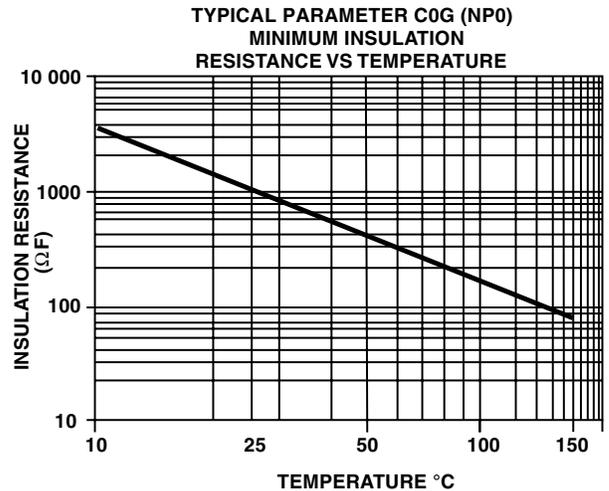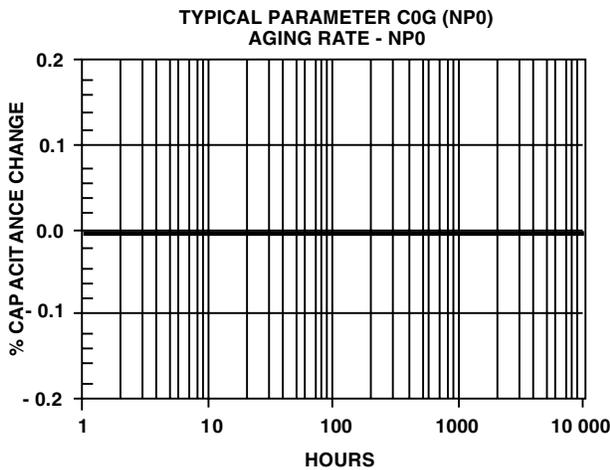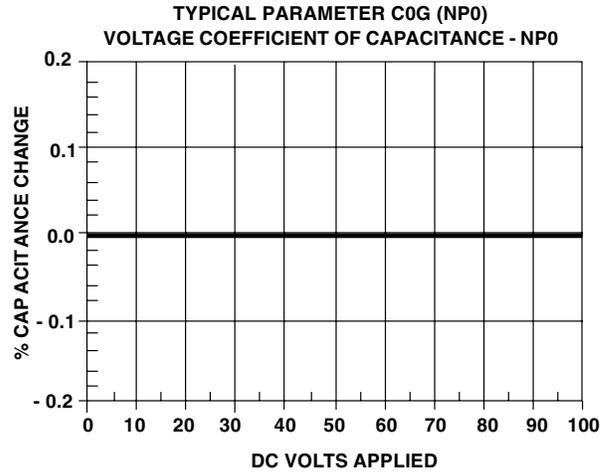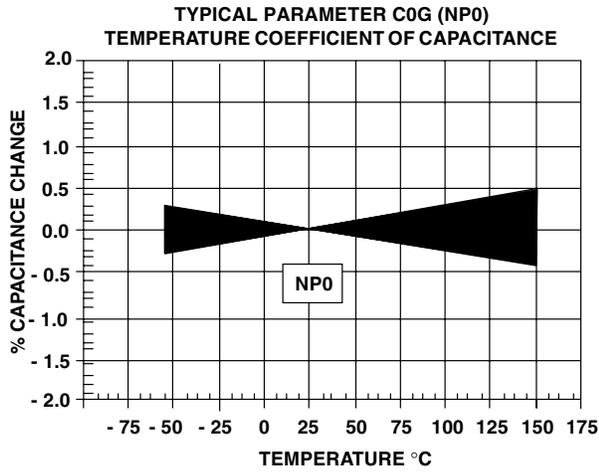



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT category](#):

Click to view products by [Vishay manufacturer](#):

Other Similar products are found below :

[D55342E07B523DR-T/R](#) [NCA1206X7R103K50TRPF](#) [NCA1206X7R104K16TRPF](#) [NIN-FB391JTRF](#) [NIN-FC2R7JTRF](#)
[NMC0402NPO220J50TRPF](#) [NMC0402X5R105K6.3TRPF](#) [NMC0402X5R224K6.3TRPF](#) [NMC0402X7R103J25TRPF](#)
[NMC0402X7R153K16TRPF](#) [NMC0603NPO330G50TRPF](#) [NMC0603NPO331F50TRPF](#) [NMC0603X5R475M6.3TRPF](#)
[NMC0805NPO220J100TRPF](#) [NMC0805NPO270J50TRPF](#) [NMC0805NPO681F50TRPF](#) [NMC0805NPO820J50TRPF](#)
[NMC0805X7R224K25TRPF](#) [NMC1206X7R102K50TRPF](#) [NMC1210Y5V105Z50TRPLPF](#) [NMC-H0805X7R472K250TRPF](#) [NMC-](#)
[L0402NPO7R0C50TRPF](#) [NMC-L0603NPO2R2B50TRPF](#) [NMC-Q0402NPO8R2D200TRPF](#) [C1206C101J1GAC](#) [C1608C0G2A221J](#)
[C1608X7R1E334K](#) [C2012C0G2A472J](#) [2220J2K00562KXT](#) [KHC201E225M76N0T00](#) [1812J2K00332KXT](#) [CCR06CG153FSV](#)
[CDR14BP471CJUR](#) [CDR31BX103AKWR](#) [CDR33BX683AKUS](#) [CGA2B2C0G1H010C](#) [CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#)
[CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H120J](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#) [CGA2B2C0G1H2R2C](#)
[CGA2B2C0G1H390J](#) [CGA2B2C0G1H391J](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2C0G1H820J](#)