





# Low Capacitance, Single-Line ESD-Protection Diode in SOD-323



20503



22756 SOD-323

## FEATURES

- For LIN-Bus applications
- Small SOD-323 package
- 1-line ESD-protection
- Working range:  $\pm 26.5\text{ V}$
- Low leakage current  $I_R < 0.05\ \mu\text{A}$
- Low load capacitance  $C_D < 16\ \text{pF}$
- ESD-protection acc. IEC 61000-4-2  $\pm 30\ \text{kV}$  contact discharge  $\pm 30\ \text{kV}$  air discharge
- ESD capability according to AEC-Q101: human body model: class H3B:  $> 8\ \text{kV}$
- e3 - pins plated with tin (Sn)
- AEC-Q101 qualified available
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



RoHS COMPLIANT

## MARKING (example only)



XYZ = type code (see table below)  
bar = pin 1

## LINKS TO ADDITIONAL RESOURCES



| ORDERING INFORMATION  |                                |  |       |            |  |  |                         |
|-----------------------|--------------------------------|--|-------|------------|--|--|-------------------------|
| PART NUMBER (EXAMPLE) | ENVIRONMENTAL AND QUALITY CODE |  |       |            | PACKAGING CODE                           |  | ORDERING CODE (EXAMPLE) |
|                       | AEC-Q101 QUALIFIED             | RoHS-COMPLIANT + LEAD (Pb)-FREE TERMINATIONS |       | TIN PLATED | 3K PER 7" REEL (8 mm TAPE) 15K/BOX = MOQ | 10K PER 13" REEL (8 mm TAPE) 10K/BOX = MOQ |                         |
|                       |                                | STANDARD                                     | GREEN |            |  |  |                         |
| VLIN2626-02G          | -                              | E  | -     | 3          | -08                                      | -  | VLIN2626-02G-E3-08      |
| VLIN2626-02G          | H                              | E  | -     | 3          | -08                                      | -  | VLIN2626-02GHE3-08      |
| VLIN2626-02G          | -                              | E  | -     | 3          | -  | -18  | VLIN2626-02G-E3-18      |
| VLIN2626-02G          | H                              | E  | -     | 3          | -  | -18  | VLIN2626-02GHE3-18      |

| PACKAGE DATA |              |           |         |                                      |                                   |                              |
|--------------|--------------|-----------|---------|--------------------------------------|-----------------------------------|------------------------------|
| DEVICE NAME  | PACKAGE NAME | TYPE CODE | WEIGHT  | MOLDING COMPOUND FLAMMABILITY RATING | MOISTURE SENSITIVITY LEVEL        | SOLDERING CONDITIONS         |
| VLIN2626-02G | SOD-323      | 262       | 4.30 mg | UL 94 V-0                            | MSL level 1 (according J-STD-020) | Peak temperature max. 260 °C |

| ABSOLUTE MAXIMUM RATINGS |  |           |             |      |
|--------------------------|--|-----------|-------------|------|
| PARAMETER                | TEST CONDITIONS  | SYMBOL    | VALUE       | UNIT |
| Peak pulse current       | $T_A = 25\ \text{°C}$ ; acc. IEC 61000-4-5; $t_p = 8/20\ \mu\text{s}$ ; single shot                    | $I_{PPM}$ | 4           | A    |
| Peak pulse power         | $T_A = 25\ \text{°C}$ ; acc. IEC 61000-4-5; $t_p = 8/20\ \mu\text{s}$ ; single shot                    | $P_{PP}$  | 200         | W    |
| ESD immunity             | Contact discharge acc. IEC 61000-4-2; $C = 150\ \text{pF}$ , $R = 330\ \Omega$ , $T_A = 25\ \text{°C}$ | $V_{ESD}$ | $\pm 30$    | kV   |
|                          | Air discharge acc. IEC 61000-4-2; $C = 150\ \text{pF}$ , $R = 330\ \Omega$ , $T_A = 25\ \text{°C}$     |           | $\pm 30$    | kV   |
| ESD immunity             | Contact discharge acc. ISO 10605; $C = 330\ \text{pF}$ , $R = 330\ \Omega$ , $T_A = 25\ \text{°C}$     | $V_{ESD}$ | $\pm 30$    | kV   |
|                          | Air discharge acc. ISO 10605; $C = 330\ \text{pF}$ , $R = 330\ \Omega$ , $T_A = 25\ \text{°C}$         |           | $\pm 30$    | kV   |
| Operating temperature    | Junction temperature   | $T_J$     | -55 to +150 | °C   |
| Storage temperature      |  | $T_{STG}$ | -55 to +150 | °C   |



| ELECTRICAL CHARACTERISTICS ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |  |               |      |      |      |               |
|---|--|---------------|------|------|------|---------------|
| PARAMETER   | TEST CONDITIONS / REMARKS  | SYMBOL        | MIN. | TYP. | MAX. | UNIT          |
| Protection paths  | Number of lines which can be protected                               | $N_{channel}$ | -    | -    | 1    | lines         |
| Reverse stand-off voltage   | Max. reverse working voltage   | $V_{RWM}$     | -    | -    | 26.5 | V             |
| Reverse voltage   | At $I_R = 0.05\text{ }\mu\text{A}$                                   | $V_R$         | 26.5 | -    | -    | V             |
| Reverse current   | At $V_{RWM} = 26.5\text{ V}$   | $I_R$         | -    | -    | 0.05 | $\mu\text{A}$ |
| Reverse breakdown voltage   | At $I_R = 1\text{ mA}$   | $V_{BR}$      | 28   | 30   | 32   | V             |
| Reverse clamping voltage  | At $I_{PP} = 1\text{ A}$ ; $t_p = 8/20\text{ }\mu\text{s}$           | $V_C$         | -    | 32   | 40   | V             |
|   | At $I_{PP} = I_{PPM} = 4\text{ A}$ ; $t_p = 8/20\text{ }\mu\text{s}$ | $V_C$         | -    | 39   | 50   | V             |
| Capacitance   | At $V_R = 0\text{ V}$ , $f = 1\text{ MHz}$                           | $C_D$         | -    | 13.5 | 16   | pF            |

**TYPICAL CHARACTERISTICS** ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)

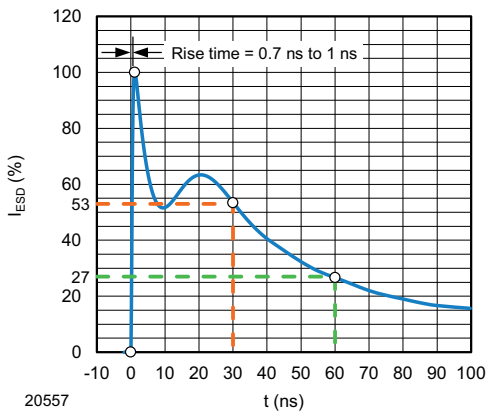


Fig. 1 - ESD Discharge Current Wave Form acc. IEC 61000-4-2 (330  $\Omega$  / 150 pF)

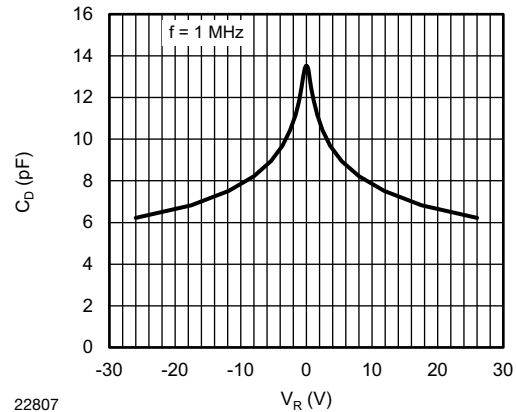


Fig. 3 - Typical Capacitance  $C_D$  vs. Reverse Voltage  $V_R$

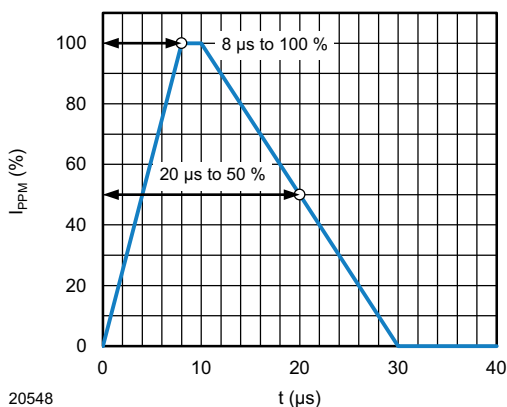


Fig. 2 - 8/20  $\mu\text{s}$  Peak Pulse Current Wave Form acc. IEC 61000-4-5

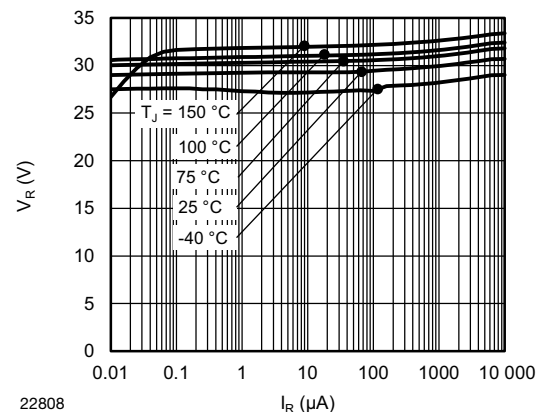


Fig. 4 - Typical Reverse Voltage  $V_R$  vs. Reverse Current  $I_R$

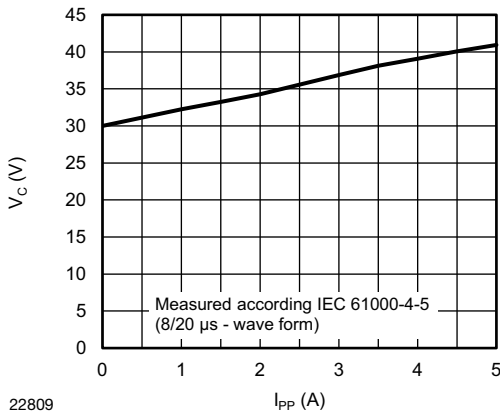


Fig. 5 - Typical Peak Clamping Voltage  $V_C$  vs. Peak Pulse Current  $I_{PP}$



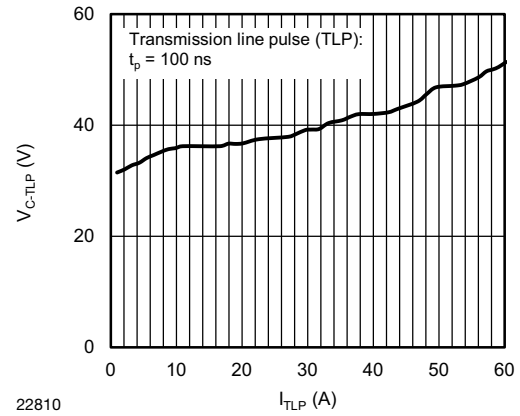


Fig. 6 - Typical Clamping Voltage  $V_{C-TLP}$  vs. Pulse Current  $I_{TLP}$

**PACKAGE DIMENSIONS** in millimeters (inches) **SOD-323**

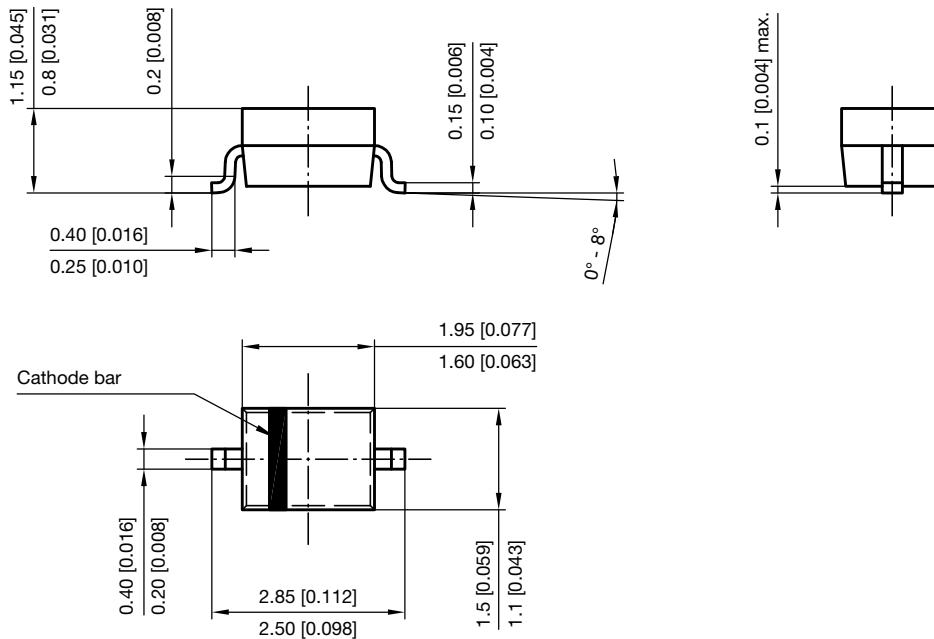


Footprint recommendation:

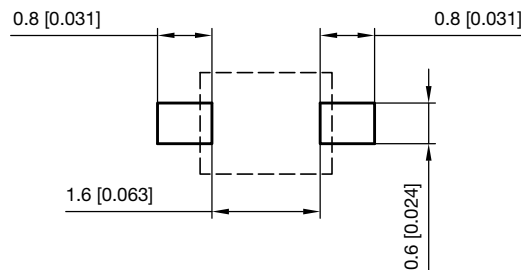


Document no.: S8-V-3910.02-001 (4)  
 Created - Date: 24.August.2004  
 Rev. 6 - Date: 23.Sept.2016  
 22771




**CARRIER TAPE SOD-323**

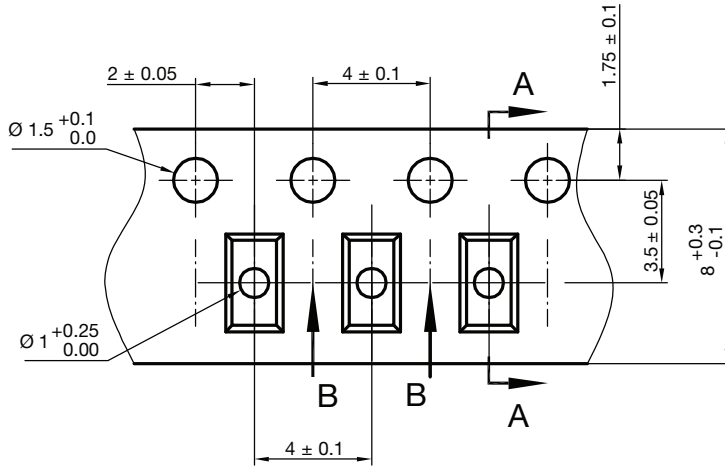

A-A Section

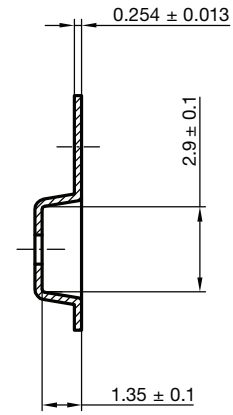


B-B Section



Document no.: S8-V-3717.07-002 (4)  
Created - Date: 09. Feb. 2010  
22824

**ORIENTATION IN CARRIER TAPE SOD-323**

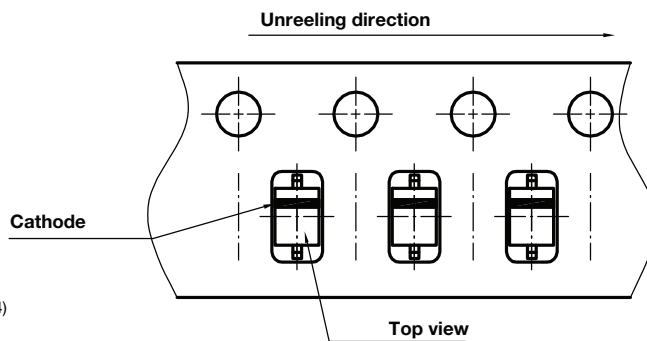

Document no.: S8-V-3717.07-003 (4)  
Created - Date: 09. Feb. 2010  
22772



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Vishay](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#)  
[P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#)  
[ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#)  
[3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#)  
[82356240030](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#)  
[D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#)