



## Standard Recovery Diodes, (Stud Version), 150 A



DO-8 (DO-205AA)

### FEATURES

- Alloy diode
- High current carrying capability
- High surge current capabilities
- Stud cathode and stud anode version
- Designed and qualified for industrial level
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



RoHS  
COMPLIANT

### TYPICAL APPLICATIONS

- Battery chargers
- Welders
- Machine tool controls
- High power drives
- Medium traction applications
- Freewheeling diodes

| PRIMARY CHARACTERISTICS |                 |
|-------------------------|-----------------|
| $I_{F(AV)}$             | 150 A           |
| Package                 | DO-8 (DO-205AA) |
| Circuit configuration   | Single          |

| MAJOR RATINGS AND CHARACTERISTICS |                 |             |                   |
|-----------------------------------|-----------------|-------------|-------------------|
| PARAMETER                         | TEST CONDITIONS | VALUES      | UNITS             |
| $I_{F(AV)}$                       |                 | 150         | A                 |
|                                   | $T_C$           | 150         | °C                |
| $I_{F(RMS)}$                      |                 | 235         | A                 |
| $I_{FSM}$                         | 50 Hz           | 3570        | A                 |
|                                   | 60 Hz           | 3740        |                   |
| $I^2t$                            | 50 Hz           | 64          | kA <sup>2</sup> s |
|                                   | 60 Hz           | 58          |                   |
| $V_{RRM}$                         | Range           | 100 to 600  | V                 |
| $T_J$                             |                 | -40 to +200 | °C                |

### ELECTRICAL SPECIFICATIONS

| VOLTAGE RATINGS                        |              |  |  |  |
|--|--------------|--|--|--|
| TYPE NUMBER                            | VOLTAGE CODE | $V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE<br>V | $V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE<br>V | $I_{RRM}$ MAXIMUM AT $T_J = 175\text{ °C}$<br>mA |
| VS-45L(R)<br>VS-150K(R)<br>VS-150KS(R) | 10           | 100  | 200  | 35   |
|  | 20           | 200  | 300  |  |
|  | 30           | 300  | 400  |  |
|  | 40           | 400  | 500  |  |
|  | 60           | 600  | 720  |  |



| FORWARD CONDUCTION  |               |   |                           |        |                    |
|---|---------------|---|---------------------------|--------|--------------------|
| PARAMETER   | SYMBOL        | TEST CONDITIONS   |                           | VALUES | UNITS              |
| Maximum average forward current at case temperature           | $I_{F(AV)}$   | 180° conduction, half sine wave   |                           | 150    | A                  |
|   |               |   |                           | 150    | °C                 |
| Maximum RMS forward current                                   | $I_{F(RMS)}$  | DC at 142 °C case temperature   |                           | 235    |                    |
| Maximum peak, one cycle forward, non-repetitive surge current | $I_{FSM}$     | t = 10 ms   | No voltage reapplied      | 3570   | A                  |
|   |               | t = 8.3 ms  |                           | 3740   |                    |
|   |               | t = 10 ms   | 100 % $V_{RRM}$ reapplied | 3000   |                    |
|   |               | t = 8.3 ms  |                           | 3140   |                    |
| Maximum $I^2t$ for fusing                                     | $I^2t$        | t = 10 ms   | No voltage reapplied      | 64     | kA <sup>2</sup> s  |
|   |               | t = 8.3 ms  |                           | 58     |                    |
|   |               | t = 10 ms   | 100 % $V_{RRM}$ reapplied | 45     |                    |
|   |               | t = 8.3 ms  |                           | 41     |                    |
| Maximum $I^2\sqrt{t}$ for fusing                              | $I^2\sqrt{t}$ | t = 0.1 to 10 ms, no voltage reapplied  |                           | 640    | kA <sup>2</sup> √s |
| Low level value of threshold voltage                          | $V_{F(TO)1}$  | (16.7 % $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), $T_J = T_J$ maximum |                           | 0.67   | V                  |
| High level value of threshold voltage                         | $V_{F(TO)2}$  | (I > $\pi \times I_{F(AV)}$ ), $T_J = T_J$ maximum                                      |                           | 0.83   |                    |
| Low level value of forward slope resistance                   | $r_{f1}$      | (16.7 % $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), $T_J = T_J$ maximum |                           | 1.42   | mW                 |
| High level value of forward slope resistance                  | $r_{f2}$      | (I > $\pi \times I_{F(AV)}$ ), $T_J = T_J$ maximum                                      |                           | 0.91   |                    |
| Maximum forward voltage drop                                  | $V_{FM}$      | $I_{pk} = 471$ A, $T_J = 25$ °C, $t_p = 10$ ms sinusoidal wave                          |                           | 1.33   | V                  |

| THERMAL AND MECHANICAL SPECIFICATIONS                    |                |   |  |                  |                     |
|--|----------------|---|--|------------------|---------------------|
| PARAMETER  | SYMBOL         | TEST CONDITIONS                               |  | VALUES           | UNITS               |
| Maximum junction operating and storage temperature range | $T_J, T_{Stg}$ |   |  | -40 to 200       | °C                  |
| Maximum thermal resistance, junction to case             | $R_{thJC}$     | DC operation                                  |  | 0.25             | K/W                 |
| Maximum thermal resistance, case to heatsink             | $R_{thCS}$     | Mounting surface, smooth, flat and greased    |  | 0.10             |                     |
| Mounting torque 45L                                      | minimum        | Not lubricated threads                        |  | 14.1 (125)       | N · m<br>(lbf · in) |
|  | maximum        |   |  | 17.0 (150)       |                     |
|  | minimum        | Lubricated threads                            |  | 12.2 (108)       |                     |
|  | maximum        |   |  | 15.0 (132)       |                     |
| Mounting torque 150K 150KS                               | minimum        | Not lubricated threads                        |  | 11.3 (100)       | N · m<br>(lbf · in) |
|  | maximum        |   |  | 14.1 (125)       |                     |
|  | minimum        | Lubricated threads                            |  | 9.5 (85)         |                     |
|  | maximum        |   |  | 12.5 (110)       |                     |
| Approximate weight                                       |                |   |  | 100              | g                   |
|  |                |   |  | 3.5              | oz.                 |
| Case style   | 45L            | See dimensions - link at the end of datasheet |  | DO-30 (DO-205AC) |                     |
|  | 150K-A         |   |  | DO-8 (DO-205AA)  |                     |
|  | 150KS          |   |  | B-42             |                     |

| $\Delta R_{thJC}$ CONDUCTION |                       |                        |                     |       |
|------------------------------|-----------------------|------------------------|---------------------|-------|
| CONDUCTION ANGLE             | SINUSOIDAL CONDUCTION | RECTANGULAR CONDUCTION | TEST CONDITIONS     | UNITS |
| 180°                         | 0.031                 | 0.023                  | $T_J = T_J$ maximum | K/W   |
| 120°                         | 0.038                 | 0.040                  |                     |       |
| 90°                          | 0.048                 | 0.053                  |                     |       |
| 60°                          | 0.071                 | 0.075                  |                     |       |
| 30°                          | 0.120                 | 0.121                  |                     |       |

**Note**

- The table above shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

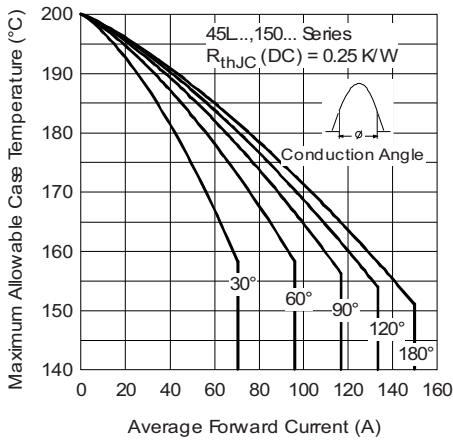


Fig. 1 - Current Ratings Characteristics

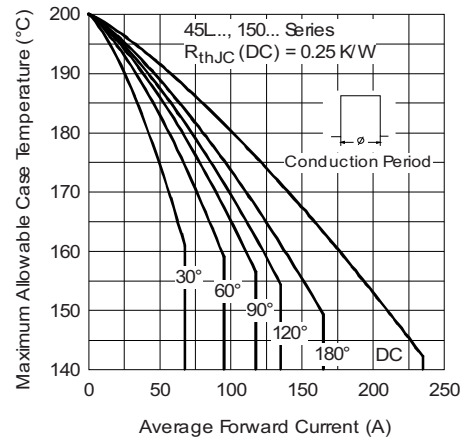


Fig. 2 - Current Ratings Characteristics

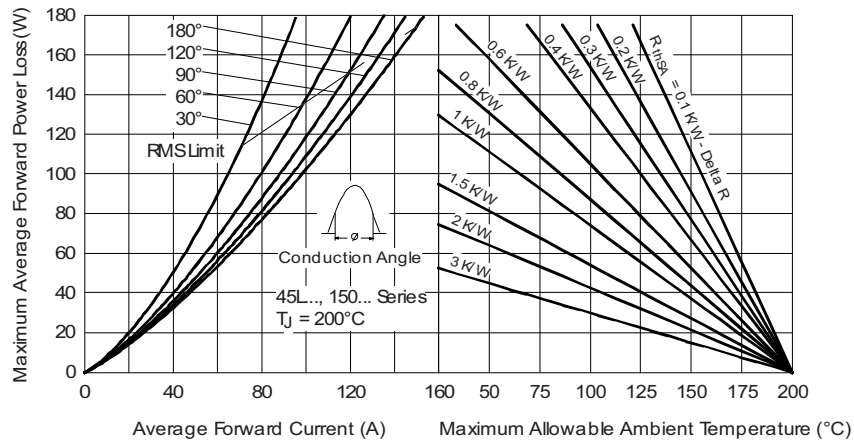


Fig. 3 - Forward Power Loss Characteristics

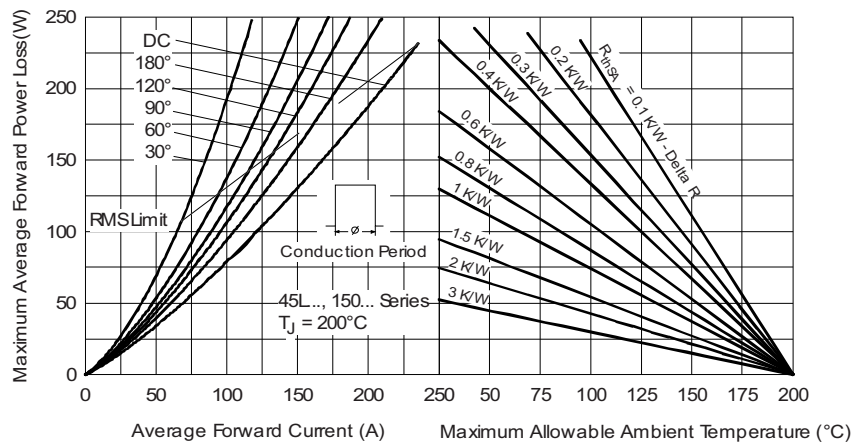


Fig. 4 - Forward Power Loss Characteristics

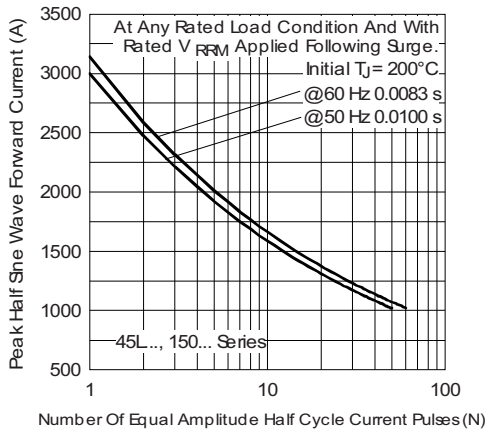


Fig. 5 - Maximum Non-Repetitive Surge Current

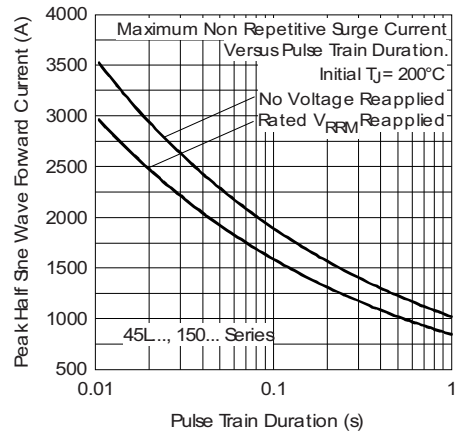


Fig. 6 - Maximum Non-Repetitive Surge Current

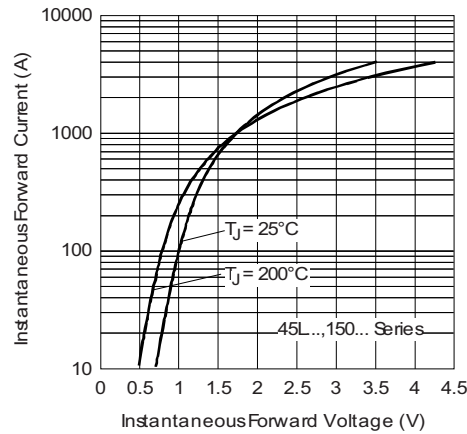


Fig. 7 - Forward Voltage Drop Characteristics


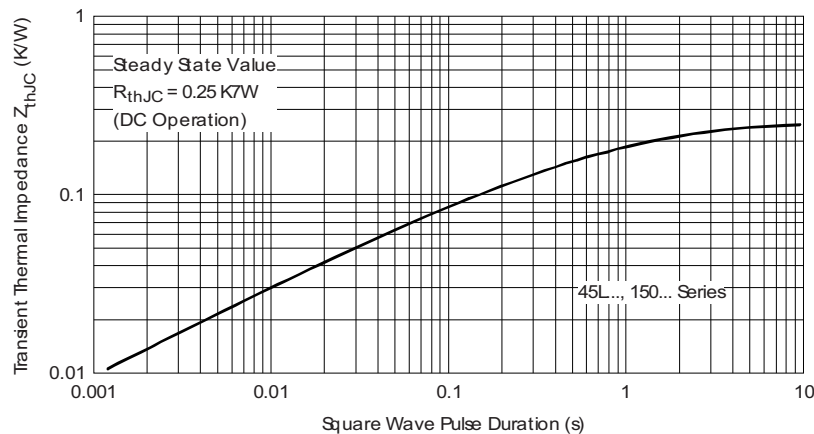



Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristics



## ORDERING INFORMATION TABLE

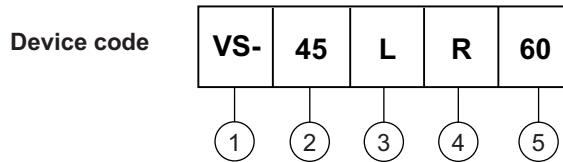

- 1** - Vishay Semiconductors product
- 2** - 45 = standard version
- 3** - L = essential part number
- 4** - R = stud reverse polarity (anode to stud)  
None = stud normal polarity (cathode to stud)
- 5** - Voltage code x 10 =  $V_{RRM}$  (see Voltage Ratings table)

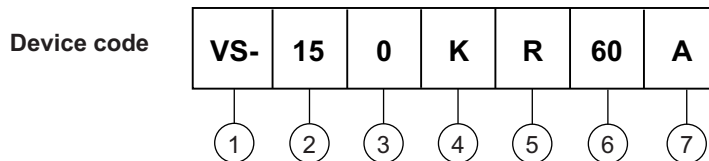

- 1** - Vishay Semiconductors product
- 2** - 15 = essential part number
- 3** - 0 = standard device
- 4** - Case style:  
K = DO-8 (DO-205AA)  
KS = B-42
- 5** - R = stud reverse polarity (anode to stud)  
None = stud normal polarity (cathode to stud)
- 6** - Voltage code x 10 =  $V_{RRM}$  (see Voltage Ratings table)
- 7** - A = essential part number for 150K (omitted for 150KS)

**Note**


- For metric device M12 x 1.75 contact factory

| LINKS TO RELATED DOCUMENTS |  |
|----------------------------|--|
| Dimensions                 | <a href="http://www.vishay.com/doc?95314">www.vishay.com/doc?95314</a> |




## DO-205AC (DO-30), DO-205AA (DO-8) and B-42 for 45L(R), 150K(R) and 150KS(R) Series

### DIMENSIONS FOR 45L(R) SERIES - DO-205AC (DO-30) in millimeters (inches)

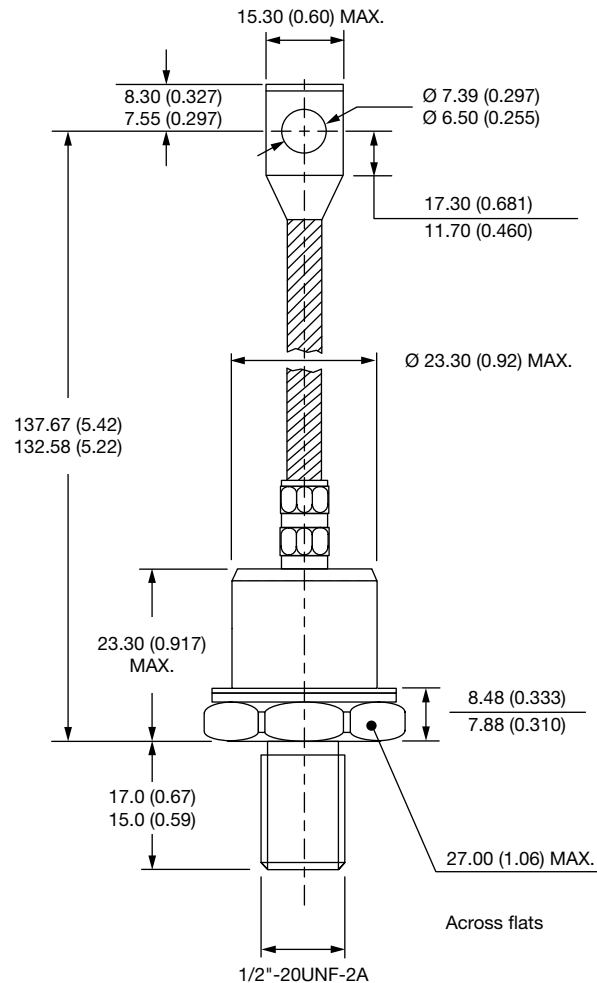



### DIMENSIONS FOR 150K(R) SERIES - DO-205AA (DO-8) in millimeters (inches)

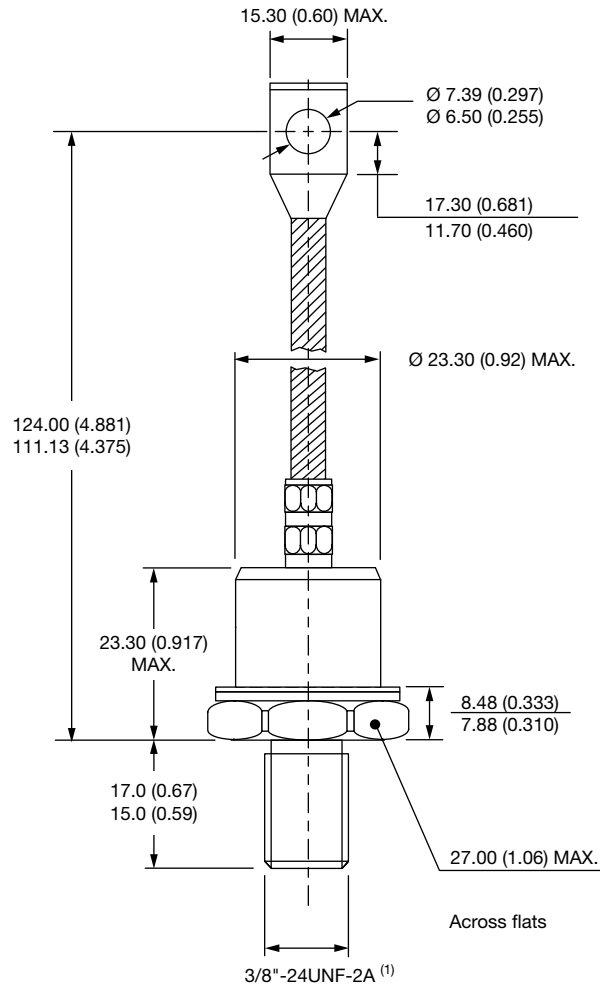


#### Note

<sup>(1)</sup> For metric device M12 x 1.75 contact factory



## DIMENSIONS FOR 150KS(R) SERIES - B-42 in millimeters (inches)

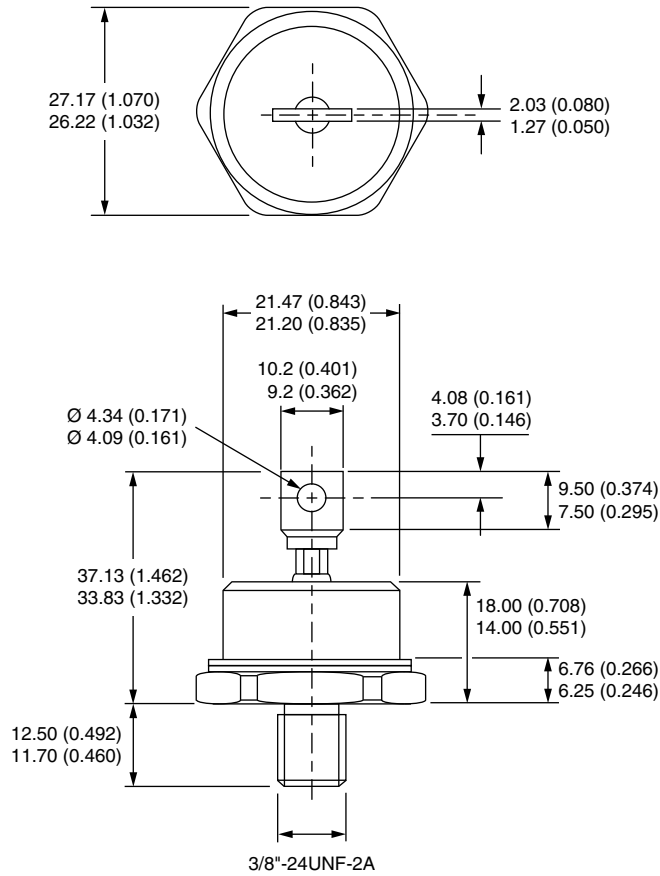





## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rectifiers](#) category:*

*Click to view products by [Vishay](#) manufacturer:*

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [VS-80-7161](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [ACGRA4007-HF](#)  
[ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#)  
[85HFR60](#) [40HFR60](#) [1N1186RA](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#)  
[VS-12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#)