




6065 and 6069 Series Panel Mount Indicator Mounting Hole 0.375"



The Glo-Lite Indicator Lights are designed for applications requiring a low cost, line voltage power-on indicator. These indicator lights utilize a high brightness C2A neon lamp providing good visibility and a long life. These indicator lights are constructed with an one-piece body and lens.

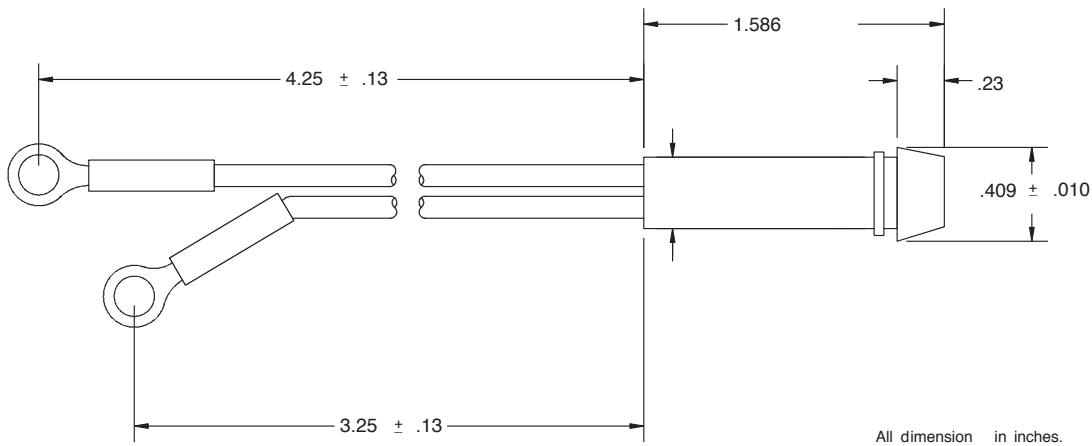

PART NUMBER	ELECTRICAL CHARACTERISTICS		LENS COLOR
	VOLTAGE	INTERNAL RESISTOR	
6065-951-634R	208 - 277	150K OHM, 1/3W	RED
6069-952-634R	440 - 600	1KK(MEG) OHM,1/2W	RED
6065-953-634R	110 - 240	150K OHM, 1/3W	RED
6065-955-634G	208 - 277	150K OHM, 1/3W	GREEN
6069-950-634G	440 - 600	1KK(MEG) OHM,1/2W	GREEN

DIMENSIONS STYLE: INCHES GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	
INCHES	
.XX	±.030
.XXX	±.015

- Mounting Hole: .375 "
- Maximum Panel Thickness: 1.25 "
- Housing/Lens Material: Nylon
- Wire Leads: 22 AWG, black 105°C PVC Insulation, ring terminals.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Panel Mount Indicators](#) category:

Click to view products by [Visual Communications](#) manufacturer:

Other Similar products are found below :

[607-1312-310F](#) [607-3232-140F](#) [6091M1-24V](#) [6091M5-24V](#) [6091M7-24V](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL589WL8R](#)
[Q6P3BXXB12E](#) [H8630FBBA3](#) [MPC5ADW6.0](#) [DX1091GN](#) [NL177WL3G](#) [NL276C3G](#) [NL2950BWL3G](#) [NL2950CWL2R](#) [NL589WL2R](#)
[NL67C3G](#) [NL67C3R](#) [2191L1-12V](#) [PB22SIOL0RG](#) [PB22SPPM41R](#) [PB22SPPM61R](#) [LE177C5B](#) [LH1048BSWL3702](#) [LH1048BWL3702](#)
[LH382A](#) [LHM62B](#) [SSI-LXH387USBD-150](#) [SSI-LXH9ZIC40587](#) [SSP-LXS110818BA](#) [FL2950BWL7R](#) [FL2950WL7R](#) [FL2951WL8G](#)
[FL2951WL8R](#) [FL589C7R](#) [FL67C7R](#) [FL67WL8G](#) [2191QU7-24V](#) [2191U1-12V](#) [2191U5-12V](#) [2191U5-6V](#) [2191U7-12V](#) [249-4167-3734-504F](#) [Q6P5BXXG02E](#) [3990A7](#) [5110F3-12V](#) [MPC5BCW18.0](#) [556-1237-801F](#)