



PMRL200 Series 0.312" (7.93mm) Recessed LED Panel Indicator



LED indicator with reflective bezel, available with single, bi-color or tri-color
Voltage: 2VDC - 120VAC, water-tight option

Key features

- Mounting hole size: 0.312" (7.93mm)
- Maximum panel thickness: .160" (PMRL200), .100" (PMRL200, water-tight)
- Recessed bezel LED
- Reflective chrome-plated body
- Voltage: 2-60 VDC or 120VAC
- Terminals: Bi-pin or wire leads (6" wire leads, 24 AWG)
- Available with a variety of LEDs including AlInGaP and InGaN technology for high brightness applications, single color, bi-color and with integrated resistors
- T-1 3/4 (5mm) LED
- Available in six LED single colors: red, amber, green, orange, blue, and white
- Available in one bi-color: red/green
- Available in two tri-color: red/amber/green or green/amber/red
- Low power consumption - uses up to 90% less energy than an incandescent indicator
- Mounts with hex nut and washer (included)
- Suitable for high vibration applications
- LEDs operate significantly cooler than traditional lamps
- Compliant with RoHS and REACH

- Reflective Chrome-Plated Body - Mounting Hardware Provided - For Detailed LED Data, See Discrete Section, MODEL 125
- Maximum Panel Thickness .160"(PMRL200); .100"(PMRL200, Water-Tight)

1	Model	Wires
	PMRL200	W (optional)

TO ORDER, FOLLOW THE EXAMPLE:

Select one BOLD component from each numbered category in the tables below.								
1	Model	Wire	2	LED	3	Voltage	4	Water Tight
	PMRL200	W		-BCA		12H		

→Part Number **PMRL200W-BCA12H**

STANDARD INTENSITY - DIFFUSED ENCAPSULATION						
2	LED	Color	λ_{pk} (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table ^[2]
	-BR	RED	635	14	60	I
	-BA	AMB	583	16	60	I
	-BG	GRN	565	10	60	I

MEDIUM INTENSITY - TINTED ENCAPSULATION						
2	LED	Color	λ_{pk} (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table ^[2]
	-BCR	RED	635	120	35	I
	-BCA	AMB	583	100	35	I
	-BCG	GRN	565	80	24	I

HIGH INTENSITY - WATERCLEAR ENCAPSULATION						
2	LED	Color	λ_{pk} (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table ^[2]
	-NWR	RED	634	2800	30	I
	-NWO	ORG	605	2000	30	I
	-NWA	AMB	592	2800	30	I
	-NWG	GRN	520	2400	45	II
	-NWB	BLU	465	700	45	II
	-NWW	CWHT		2500	50	II
	-NWL	WWHT		1800	50	II
	-NKR	RED	634	3600	15	I
	-NKO	ORG	605	8000	15	I
	-NKA	AMB	592	3600	15	I
	-NKG	GRN	520	10000	15	II
	-NKB	BLU	465	3000	15	II
	-NKW	CWHT		9200	20	II
	-NKL	WWHT		9200	15	II

SPECIALTY LEDs - DIFFUSED ENCAPSULATION							
2	LED	Color	λ_{pk} (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table ^[3]	Description
	-RLP ^[6]	RED	635	2.3	50	[3]	Low Power
	-ALP ^[6]	AMB	583	2.1	50	[3]	Low Power
	-GLP ^[6]	GRN	565	2.3	50	[3]	Low Power
	-LRG	RED/GRN	660/565	90/40	60	I	Bi-Color, Green Cathode
	-RAG ^[7]	RED/AMB/GRN	630/565	6/6/6	60	I	Tri-Color, Common Cathode
	-GAR ^[7]	GRN/AMB/RED	635/565	5/5/5	50	I	Tri-Color, Common Anode

[1] I_v = typical luminous intensity @ $I_f = 20\text{mA}$ ($T_a = 25^\circ\text{C}$). For Low Power LEDs, $I_f = 2\text{mA}$.

[2] See Voltage/Current table for design specifications. Design current for low power LEDs = 2mA.

[3] $T_a = 25^\circ\text{C}$. Voltage "2" indicates external resistor required. Voltages 5H through 60H are VDC. For AC operation, insert D after Voltage (e.g. 24HD). D indicates built-in rectifier, not required for 5H or 120VAC. DC operation not available for 120V. Bi-Color and Tri-Color not available in AC voltages.

[4] Select high intensity LEDs only


[5] Drip-proof (not submersible), supplied with two neoprene gaskets.

[6] Omit H when selecting a voltage (e.g. PMR200-RLP12).

[7] -RAG Wire Leads: green anode/black cathode/red anode. -GAR Wire Leads: green cathode/black anode/red cathode. Tri-Color 5 or 12 volt, omit H from part number.

3	Voltage^[3]
	2
	5H
	12H
	15H
	24H
	28H
	48H
	60H
	120 ^[4]

4	Water Tight^[5]
	-WT (optional)

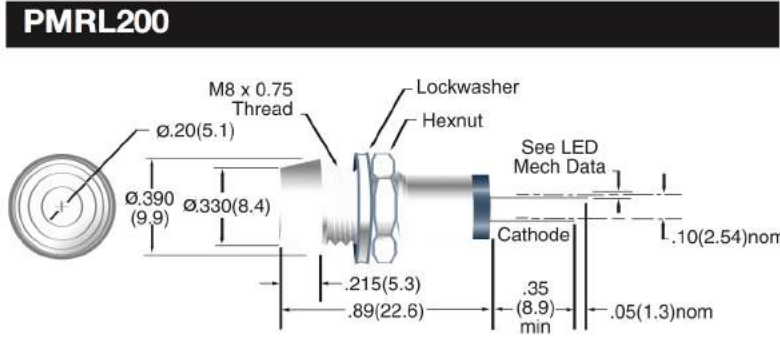

Standard Wire Leads:

6.0" total length(nominal)/.50" stripped (nominal), red anode/black cathode, 24 AWG TPB UL1061 insulation. Contact factory for other lengths, gauges and colors.

All dimensions are in inches (mm)

Tolerances: .xx"(.x) ±.025"(.63) / .xxx"(.xx)±.010"(.25)
 Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [Visual Communications](#) manufacturer:

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [CRCW04021100FRT7](#)
[CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-](#)
[WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [011349-000](#) [CRCW08052740FRT1](#) [LUC-012S070DSM](#) [LUC-](#)
[018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#) [LW1L-A1C10V-GL](#)
[LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [00-9300-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-KT39](#) [601-JJ-06](#) [601-SPB](#)
[601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#) [604-JJ-05](#)