


5101H Series Panel Mounted LED Indicator Light

Description and Features

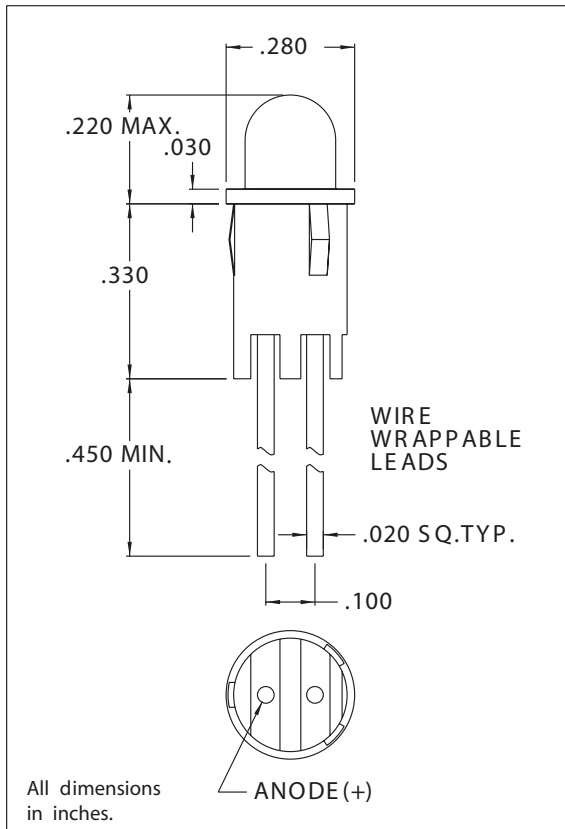

Features

- Super Brite
- Low current
- Built-in resistor chip operates directly off 5 supply without external resistor.

Mounting: Will snap-fit into \varnothing .249/.254 hole in panels .031/.062 thick.

Terminals: .020 sq.

Housing: Black Nylon

Electro-optical Characteristics

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Peak Forward Current @ 1ms-300pps (A)	Reverse Break-down Voltage Min. (V)	Peak Wavelength (nm)
5101H1	Red	6.3	10	60	2.2	3.0	1.0	5	650
5101H3	Amber	20	10	60	2.1	3.0	1.0	5	608
5101H5	Green	10	10	60	2.1	3.0	.09	4	563
5101H7	Yellow	6.3	10	60	2.1	3.0	1.0	5	585
5101H1LC	Red	2.0	2	7	1.8	2.2	.007	5	635
5101H5LC	Green	2.5	2	7	1.8	2.2	.007	5	565
5101H7LC	Yellow	2.0	2	7	1.9	2.7	.007	5	583
5101H1-5V	Red	6.0	10	15	5	7.5	-	5	635
5101H3-5V	Amber	7.0	10	15	5	7.5	-	5	583
5101H5-5V	Green	10.0	12	15	5	7.5	-	5	565

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Panel Mount Indicators](#) category:

Click to view products by [Visual Communications Company](#) manufacturer:

Other Similar products are found below :

[607-3232-140F](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL2950WL8G](#) [FL589WL8R](#) [FL67C8R](#) [H8630FBBA3](#) [NL177WL2A](#)
[NL177WL3G](#) [NL276C2A](#) [NL2950BWL3G](#) [NL589WL2R](#) [NL67C2C](#) [NL67C3R](#) [C480AABG3](#) [PB22BM41K](#) [PB22SIM40Y](#)
[PB22SKRS31KC](#) [L32R-R2-2311](#) [L3353-MWRG](#) [L39UR-R24-2111](#) [L58D-G2-W](#) [L58D-Y2-W](#) [L59D-R12-W](#) [L59UD-R12-W](#) [L625DG](#)
[L625DR](#) [LE177WL39007](#) [LH1048BSWL3702](#) [LH1048BWL3702](#) [LH382A](#) [LH677G](#) [LHM628A](#) [FL276WL7R](#) [FL2950BWL7R](#)
[FL2950WL7R](#) [FL2950WL8R](#) [FL2950WL8R-12](#) [FL2951WL8G](#) [FL2951WL8R](#) [FL589C7R](#) [FL67WL8G](#) [MPC5BCW18.0](#) [556-1605-808F](#)
[556-1705-809F](#) [556-3008-839F](#) [558-0201-818F](#) [559-0001-813F](#) [559-1301-801F](#)