




5110F Series Panel Mount LED Indicator Light for mounting hole 0.157" (4.0mm)

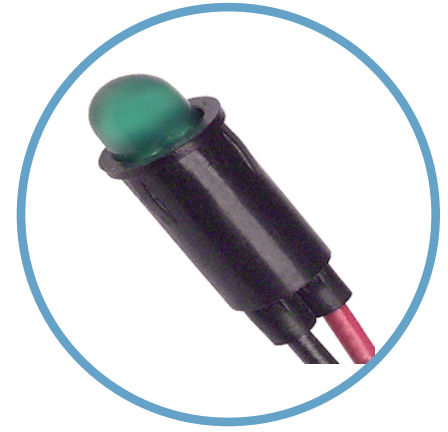

Press fit round indicator light for super bright LED T-1 (3 mm)


Applications

- panel indication
- entertainment
- appliances
- electrical panels
- industrial
- displays

Key features

- super bright T-1 (3mm) LED
- diffused lens allows wide angle viewing
- include low current option (2mA)
- 4 colors available: red, green, yellow, amber
- voltage options: 2, 5 or 12V
- snap-fit into .155"/.158" mounting hole
- built-in chip resistor operates directly off 5 and 12 volt supply, no external resistor needed.
- recommended the use of an installation tool to press against flange of housing rather than LED

Product dimensions

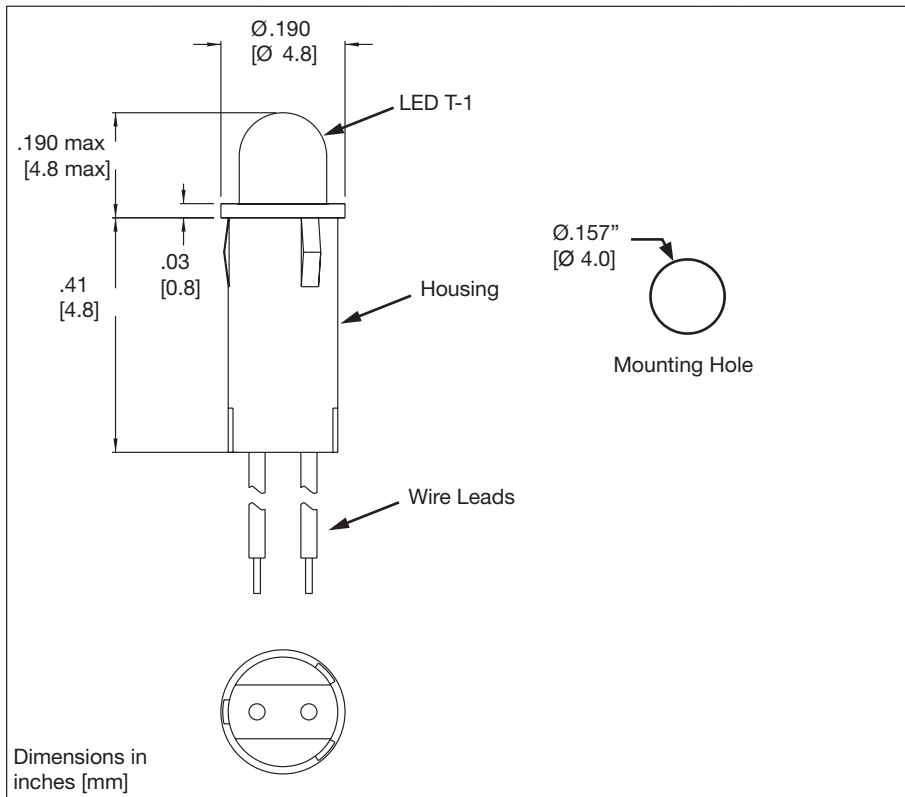

Product specifications and ordering data

Electro-optical Characteristics

	Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Peak Forward Current @ 1ms- 300pps (A)	Reverse Break-down Voltage Min. (V)	Peak Wavelength (nm)
Standard	5110F1	Red	10.0	10	30	2.0	3.0	1.0	5	635
	5110F5	Green	16.0	20	30	2.2	3.0	0.09	4	562
	5110F7	Yellow	6.3	20	30	2.1	3.0	1.0	5	585
Low Current	5110F1LC	Red	2.5	2	7	1.8	2.2	0.007	5	635
	5110F5LC	Green	2.1	2	7	1.8	2.2	0.007	5	565
	5110F7LC	Yellow	1.8	2	7	1.9	2.7	0.007	5	583
5V	5110F1-5V	Red	8.0	10	20	5	7.5	-	5	655
	5110F3-5V	Amber	8.0	10	15	5	7.5	-	5	583
	5110F5-5V	Green	8.0	10	15	5	7.5	-	5	565
12V	5110F1-12V	Red	8.0	13	20	12	15	-	5	655
	5110F3-12V	Amber	8.0	13	20	12	15	-	5	583
	5110F5-12V	Green	8.0	13	20	12	15	-	5	565

Material	
Housing	Nylon (Black)
Wire Leads	0.009" (0.23mm) Wall PVC, Red (Anode), Black (Cathode)

Operating parameters	
Operating temperature	-13°F (-25°C) to 185°F (85°C)

Installation specification	
Mounting hole	0.155/0.158" (3.94/4.01mm)
Panel thickness (minimum)	0.031/0.062" (0.79/1.58mm)
Wire leads	4.4" (111.8) min. long, #26 AWG, stripped 0.250"
Anode (+)	Red lead

Compliance & approvals



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Panel Mount Indicators](#) category:

Click to view products by [Visual Communications Company](#) manufacturer:

Other Similar products are found below :

[607-3232-140F](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL2950WL8G](#) [FL589WL8R](#) [FL67C8R](#) [H8630FBBA3](#) [NL177WL2A](#)
[NL177WL3G](#) [NL276C2A](#) [NL2950BWL3G](#) [NL589WL2R](#) [NL67C2C](#) [NL67C3R](#) [C480AABG3](#) [PB22BM41K](#) [PB22SIM40Y](#)
[PB22SKRS31KC](#) [L32R-R2-2311](#) [L3353-MWRG](#) [L39UR-R24-2111](#) [L58D-G2-W](#) [L58D-Y2-W](#) [L59D-R12-W](#) [L59UD-R12-W](#) [L625DG](#)
[L625DR](#) [LE177WL39007](#) [LH1048BSWL3702](#) [LH1048BWL3702](#) [LH382A](#) [LH677G](#) [LHM628A](#) [FL276WL7R](#) [FL2950BWL7R](#)
[FL2950WL7R](#) [FL2950WL8R](#) [FL2950WL8R-12](#) [FL2951WL8G](#) [FL2951WL8R](#) [FL589C7R](#) [FL67WL8G](#) [MPC5BCW18.0](#) [556-1605-808F](#)
[556-1705-809F](#) [556-3008-839F](#) [558-0201-818F](#) [559-0001-813F](#) [559-1301-801F](#)