


## 5332 Series T-1 3/4 Vertical LED Assembly

# **Description and Features**

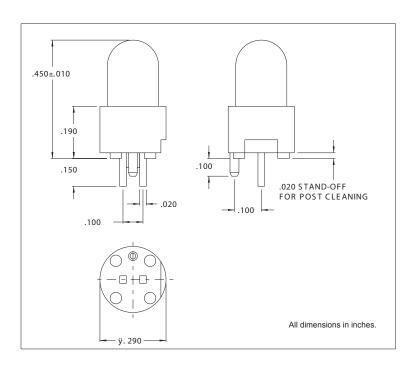

#### **Features**

- Block mounting design assures height and side-by-side spacing-alignment saves assembly costs.
- Ultra Brite T-1 3/4 LED lamp-non-diffused high intensity light.
- Press-in mounting pin secures assembly to PC board while beingsoldered.
- Standoffs prevent flux entrapment.
- RoHS Compliant

Housing: Black Nylon, UL94V-O

Note: Alternate LEDs are also available in this package as a standard variation.

Refer to "Mounting Hole Pattern 3.pdf"

## **Electro-Optical Characteristics and Ratings**

Part Number	Emitted Colo r	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward CurrentMax. (mA)	Forward Voltage		Reverse	Peak	Peak Forward Current at
					Typ. (V)	Max. (V)	Breakdown VoltageMin. (V)	Wavelength (nm)	1MS-300PPS (A)
5332H1	Red	68	20	60	2.1	3.0	5	650	1.0
5332H5	Green	100	20	60	2.2	3.0	5	563	.09
5332H7	Yellow	160	20	60	2.2	3.0	5	585	1.0



### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Circuit Board Indicators category:

Click to view products by Visual Communications Company manufacturer:

Other Similar products are found below:

568-0701-841F LTL-4221NH129 LTL-42DGNMHDP1 HLMP1521101 HLMP1523802F HLMP1700101F HLMP1700104F SMF-HM1530YD-305 SSF-LXH409SYSUGW AM2520EHSGD HLMP1301104F HLMP1385101F HLMP1421101 HLMP1503103F HLMP1503104F HLMP1700102F HLMP1700106F HLMP1700107F HLMP1790101F HLMP1790103F LTL-4211NHBP 5390H3 551-2802F 552-0794-810F 553-0222-812F HT3-BC-T 564-0700-831F WP59BLGEW 103-3101-1231-403 5502407811F 550-3007-810F 551-3307MF 552080-1 573-2399-100F 5932-927-2701-3F SMF-HM1530SRD-509 SSF-LXH100MID SSF-LXH2103SRSRDRP SSF-LXH555USBW WP937SB/4YGW WP937EB2EGW 551-0312-802F 553-0110-802F 561-5501-050F 6202T3-5VLC LTL-307G08A-D CMD57164 568-2231-313F 568-0102-809F 568-0102-808F