

- For Detailed LED Data, See Discrete Section, MODEL 200.

1 Model	
2SB	ANSI No. 2
5SB	ANSI No. 5
55SB	T5.5

TO ORDER, FOLLOW THE EXAMPLE:

Select one **BOLD** component from each SHADED column in the tables below.

1 Model	2 LED	3 Voltage
2SB	-BCG	12H

→ Part Number **2SB-BCG12H**

2 MEDIUM INTENSITY - TINTED ENCAPSULATION					
LED	Color	λ _{pk} (nm)	I _v ^[1] (mcd)	Viewing Angle	V/C Table ^[2]
-BCR	RED	635	120	35	I
-BCA	AMB	583	100	35	I
-BCG	GRN	565	80	24	I

Voltage/Current	
Design Vf/If	Max Vf/If
V/C Table I	
5V/22mA	5.5V/28mA
6V/21mA	7V/27mA
12V/20mA	14V/25mA
15V/24mA	16.5V/28mA
24V/17mA	26V/20mA
28V/16.5mA	30V/18mA
48V/15mA	50V/16mA
60V/9mA	65V/10mA
120VAC/3.5mA	130VAC/4mA

3 Voltage ^[3]	
2	
5H	
6H	
12H	
15H	
24H	
28H	
48H	
60H	
120 ^[4]	

HIGH INTENSITY - WATERCLEAR ENCAPSULATION					
LED	Color	λ _{pk} (nm)	I _v ^[1] (mcd)	Viewing Angle	V/C Table ^[2]
-NWR	RED	634	2800	30	I
-NWO	ORG	605	2000	30	I
-NWA	AMB	592	2800	30	I
-NWG	GRN	520	2400	45	II
-NWB	BLU	465	700	45	II
-NWW	CWHT		2500	50	II
-NWL	WWHT		1800	50	II
-NKR	RED	634	3600	15	I
-NKO	ORG	605	8000	15	I
-NKA	AMB	592	3600	15	I
-NKG	GRN	520	10000	15	II
-NKB	BLU	465	3000	15	II
-NKW	CWHT		9200	20	II
-NKL	WWHT		9200	15	II

Voltage/Current	
Design Vf/If	Max Vf/If
V/C Table II	
5V/15mA	5.5V/23mA
6V/15mA	7V/25mA
12V/15mA	14V/20mA
15V/15mA	16.5V/18mA
24V/15mA	26V/18mA
28V/15mA	30V/17mA
48V/9.5mA	50V/10mA
60V/9mA	65V/10mA
120VAC/3.5mA	130VAC/4mA

WIDE ANGLE/FLAT-TOPPED-WATERCLEAR ENCAPSULATION					
LED	Color	λ _{pk} (nm)	I _v ^[1] (mcd)	Viewing Angle	V/C Table ^[2]
-NFR	RED	634	780	75	I
-NFA	AMB	592	600	75	I
-NFG	GRN	520	780	75	II
-NFB	BLU	465	168	75	II
-NFW	CWHT		280	75	II

SPECIALTY LEDs						
LED	Color	λ _{pk} (nm)	I _v ^[1] (mcd)	Viewing Angle	V/C Table ^[2]	Description
-RLP ^[5]	RED	635	2.3	50	[2]	Low Power
-ALP ^[5]	AMB	583	2.1	50	[2]	Low Power
-GLP ^[5]	GRN	565	2.3	50	[2]	Low Power
-LRG	RED/GRN	660/565	90/40	60	I	Bi-Color

[1] I_v = typical luminous intensity @ If = 20mA (Ta=25°C); Low Power LEDs @ If = 2mA.

[2] See Voltage/Current table for design specifications. Design current for low power LEDs = 2mA.

[3] Ta = 25°C. Voltage "2" indicates external resistor required. Voltages 5H through 60H are VDC. For AC operation, insert D after the Voltage (e.g. 24HD). D indicates built-in rectifier; not required for 5H or 120VAC. 120VDC operation not available.

[4] Select high intensity LEDs only.

[5] Omit "H" Voltage designation (e.g. 2SB-RLP12).

Continued...


T-2 SLIDE BASED LAMP

Single-Chip


- For Detailed LED Data, See Discrete Section, MODEL 200.




2SB

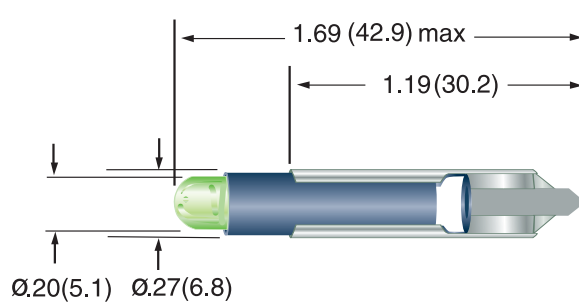

5SB

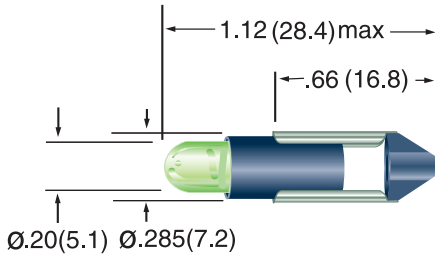

55SB

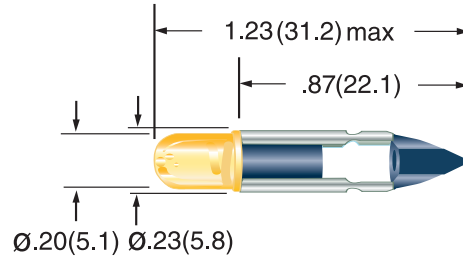


All dimensions are in inches (mm)


Tolerances: .xx"(.x) ±.025"(.63) / .xxx"(.xx)±.010"(.25)
Specifications are subject to change without notice.

Wide Angle LED Lamps


2SB, NFX Series (75°)

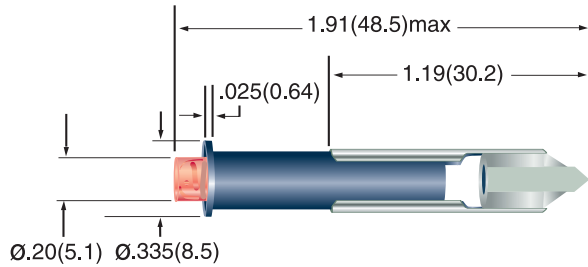

5SB, NFX Series (75°)

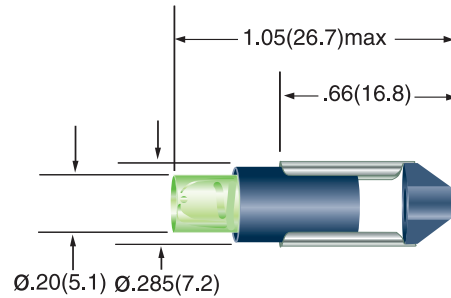

55SB, NFX Series (75°)

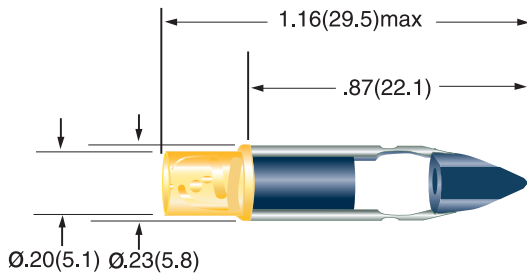

All dimensions are in inches (mm)

Tolerances: .xx"(.x) ±.025"(.63) / .xxx"(.xx)±.010"(.25)

Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Replacement Lamps - Based LEDs](#) *category:*

Click to view products by [Visual Communications Company](#) *manufacturer:*

Other Similar products are found below :

[LAPD-1A](#) [LAPD-1R](#) [LAPD-2R](#) [LAPD-6W](#) [LSTD-M4S](#) [SSP-1156B153S12](#) [SSP-1157B156U12](#) [SSP-LXS110818BA](#) [560-0101F](#) [560-0103F](#)
[LAPD-1W](#) [LAPD-6R](#) [560-0104F](#) [585-1113](#) [SSP-LXC1283S24](#) [SSP-3MB96U12G](#) [SLL-05EY](#) [560-0203F](#) [586-2206-205F](#) [SSP-](#)
[LXS1826U16A](#) [LATD-2JW](#) [24LS4-G1](#) [24LS4-R1](#) [MF200-NFW5H](#) [MB403-W60-CW-BP](#) [387LP-A](#) [1819LS2-G-CG](#) [387LP-R](#) [387LP-B](#)
[387LP-W](#) [387LP-G](#) [6S6LS155-CWR](#) [130MBLS-G-CG](#) [5000404LAMP](#) [E10SB12A](#) [E10SB130A](#) [E10SB24A](#) [E10SG12A](#) [E10SG130A](#)
[E10SG24A](#) [E10SR12A](#) [E10SR130A](#) [E10SR24A](#) [E10SW12A](#) [E10SY12A](#) [E10SY130A](#) [6S6LS130-CWW](#) [MF200-BCG12H](#) [MF200-NFR5H](#)
[24L4-B1](#)