


## 7016X Series SMT LEDs 1208 Package Size

### Description and Features

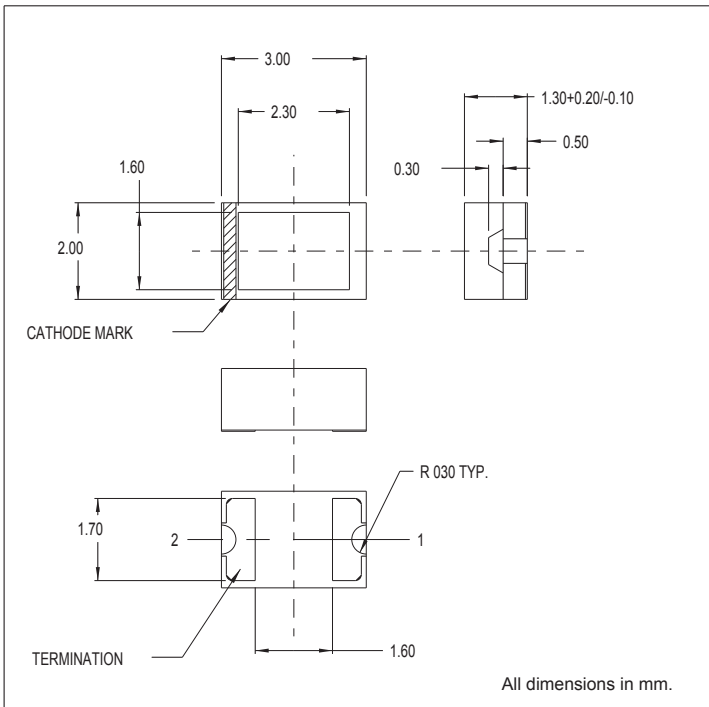

#### Surface Mount Technology

- Tape and reel packaged for high-speed autoinsertion.
- Convection and vapor-phase reflow compatible.
- Compact form enables high density placement.
- Packaged 2500 per reel.

#### Leading Edge LED Optoelectronic Performance

- Consistent high brightness.

#### Exceptional Reliability

- Stringent process controls assure quality.
- Extensive qualification testing to meet strictest requirements.
- Designed to permit easy post-reflow solder joint inspection.

- Refer to "Solder Pad Geometry 1.pdf"

## Electro-Optical Characteristics and Ratings

| PART NUMBER   | 7016X13      | 7016X1       | 7016X3       | 7016X5       | 7016X11      |
|---|--------------|--------------|--------------|--------------|--------------|
| Output Color  | Amber        | Red          | Yellow       | Green        | Red          |
| Diffusion   | Non-Diffused | Non-Diffused | Non-Diffused | Non-Diffused | Non-Diffused |
| Package Color   | Clear        | Clear        | Clear        | Clear        | Clear        |
| Test Current (mA)                                     | 20           | 20           | 20           | 20           | 20           |
| Forward Voltage Typ. (V)                              | 2.0          | 2.0          | 2.1          | 2.2          | 1.75         |
| Forward Voltage Max. (V)                              | 2.8          | 2.8          | 2.8          | 2.8          | 2.5          |
| Luminous Intensity Typ. (mcd)                         | 2.2          | 2.2          | 2.2          | 5.6          | 5.6          |
| Luminous Intensity Max. (mcd)                         | 6.3          | 6.3          | 6.3          | 16.0         | 16.0         |
| Luminous Intensity Min. (mcd)                         | 1.7          | 2.2          | 2.1          | 2.2          | 2.1          |
| Peak Wavelength (nm)                                  | 610          | 650          | 585          | 563          | 660          |
| Viewing Angle 2θ 1/2 (degrees)                        | 110          | 110          | 110          | 110          | 110          |
| Power Dissipation (mW)                                | 75           | 75           | 75           | 75           | 75           |
| Operating Temperature (°C)                            | -25 to +80   | -25 to +80   | -25 to +80   | -25 to +80   | -25 to +80   |
| Storage Temperature (°C)                              | -30 to +85   | -30 to +85   | -30 to +85   | -30 to +85   | -30 to +85   |
| Peak Forward Current Max. (1µs @ 10% duty cycle) (mA) | 75           | 75           | 75           | 75           | 75           |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard LEDs - SMD category](#):*

*Click to view products by [Visual Communications Company manufacturer](#):*

Other Similar products are found below :

[LTST-C190KYKT](#) [LTST-C19GD2WT](#) [LTST-N683GBEW](#) [LTW-170ZDC](#) [LTW-M140SZS40](#) [598-8110-100F](#) [598-8170-100F](#) [598-8610-202F](#) [67-22VRVGC/TR8](#) [AAAF5060QBFSEEZGS](#) [HLMA-QG00-S0021](#) [HLMP-6305-L0011](#) [ALMD-LB36-SV002](#) [APT1608QGWW](#) [15-21UYC/S530-A3/TR8](#) [EAST2012YA0](#) [EASV1803BA0](#) [LG M67K-H1J2-24-0-2-R18-Z](#) [LS A676-P2S1-1](#) [SML310BATT86](#) [SML-512VWT86A](#) [SML-LX0606SISUGC/A](#) [SML-LXL1307SRC-TR](#) [SML-LXR851SIUPGUBC](#) [LT1ED53A](#) [FAT801-S](#) [AM27ZGC03](#) [APB3025SGNC](#) [APFA3010SURKCGKQBDC](#) [APHK1608VGCA](#) [APT2012QGW](#) [CLX6D-FKB-CN1R1H1BB7D3D3](#) [LTST-C250KGKT](#) [LTW-020ZDCG](#) [LTW-21TS5](#) [LTW-220DS5](#) [JANTXM19500/521-02](#) [UYGT801-S](#) [42-21UYC/S530-A3/TR8](#) [LO T67F-V1AB-24-1](#) [YGFR411-H](#) [598-8330-117F](#) [SML-LX0402IC-TR](#) [CMDA20AYAA7D1S](#) [CMDA16AYDR7A1X](#) [598-8040-100F](#) [598-8070-100F](#) [598-8140-100F](#) [598-8610-200F](#) [EAST2012GA0](#)