

**NOTES:**


1. ROHS COMPLIANT
2. MATERIALS:  
 FIBER OPTIC:  $\varnothing 1.5\text{MM}$  OPTICAL CORE,  $\varnothing 2.2\text{MM}$  POLYETHYLENE CABLE JACKET  
 LENS MOUNT: OPTICAL GRADE ACRYLIC  
 LED MOUNTS: FOR SMD 22 & THR 22 - NYLON 66, UL RATING 94-V2  
 FOR THR 5 22 - NYLON 66, UL RATING 94-HB  
 LENS: POLYCARBONATE, UL RATING 94-V2  
 LENS SPACER: POLYPROPYLENE
3. OPTICAL CORE ENDS POLISHED TO 10 MICRONS
4. PANEL MOUNTING HOLE:  $.171" \pm .002$  ( $4.34\text{mm} \pm 0.05$ ) ON  $1/4"$  ( $6.35\text{mm}$ ) CENTERS
5. PANEL THICKNESS FOR SML 190:  $1/32"$  ( $0.79\text{mm}$ ) TO  $1/16"$  ( $1.60\text{mm}$ );  
 SMB 200 AND SMQ 250:  $1/16"$  ( $1.60\text{mm}$ ) TO  $1/8"$  ( $3.48\text{mm}$ )
6. FOR ADDED SECURITY FOR SMB 200 AND SMQ 250 USE SPC 040 SPACER
7. FOR BEST RESULTS USE ONLY NARROW VIEWING ANGLE NON-DIFFUSED LEDS WITH OUTPUT POWER GREATER THAN  $100\text{mcd}$
8. U.S. AND FOREIGN PATENTS ISSUED

LITE PIPE ASSEMBLY  
 ORDERING CODE (EXAMPLE): **FLX3 XX**


| LENGTH                                |               |
|---------------------------------------|---------------|
| LENGTH CODE                           | ACTUAL LENGTH |
| 02                                    | 2.0"          |
| 04                                    | 4.0"          |
| 06                                    | 6.0"          |
| 08                                    | 8.0"          |
| 12                                    | 12.0"         |
| CUSTOM LENGTHS AVAILABLE UPON REQUEST |               |

| REVISIONS |      |   |         |          |       |
|-----------|------|---|---------|----------|-------|
| ECN #     | REV. | DESCRIPTION   | DATE    | INITIALS | CHK'D |
| -         | 001  | INITIAL RELEASE   | 2/4/10  | KH       | AZ    |
| -         | 002  | MOD TO NOTE 4&5: CHG $\varnothing .059$ TO $\varnothing .039$ | 7/20/10 | KH       | AZ    |
| -         | 003  | REVISED PER ECR 092810AA01                                    | 10/4/10 | KH       | AZ    |
| 397       | 004  | REVISED PER ECR 011812KH01                                    | 1/19/12 | KH       | AZ    |


MOUNTING OPTIONS (ORDER SEPARATELY)




SMD 22




THR 22




THR 5 22

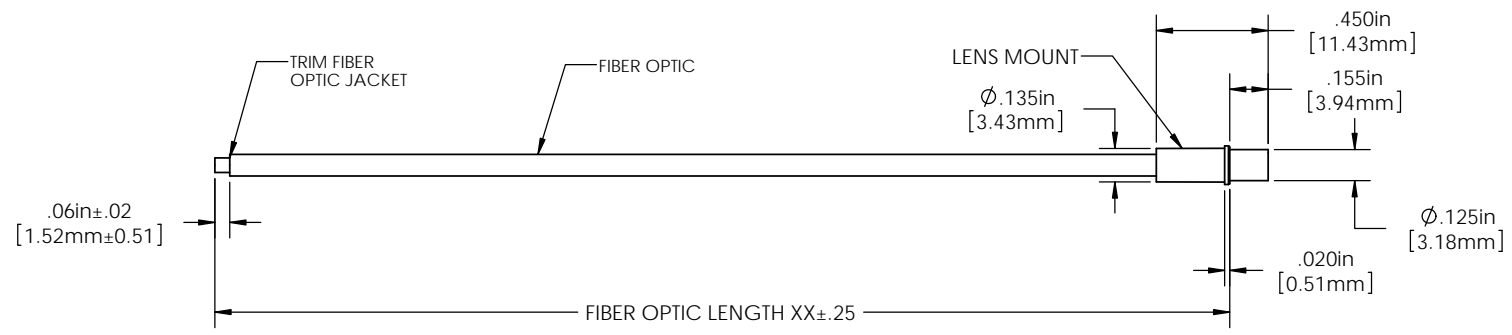


LENS (ORDER SEPARATELY)




SMB 200



SML 190



SMQ 250

|   |   |                |   |
|---|---|----------------|---|
| <small>DIMENSION STYLE: INCHES (MM)<br/>                 GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED</small>  | APPROVAL  | DATE           |  <b>OPTOELECTRONICS</b><br>190 BOSSTICK BLVD. SUITE 101 SAN MARCOS, CA 92069 U.S.A.<br>PHONE: (760) 560-1300, FAX: (760) 560-1301 EMAIL: vccsales@vcc3lite.com |
|   | <small>INCHES</small>   <small>MM</small><br>X $\pm .020$   $\pm .508$<br>XX $\pm .010$   $\pm .254$<br>XXX $\pm .005$   $\pm .127$ | DRAWN: KHOWARD |   |
| ✓ BREAK ALL CORNERS AND SHARP EDGES (2X MIN)  | CHECKED: AZANELLI   | 2/10/10        | TITLE:<br><b>3MM FLEXFIRE FLEXIBLE LITEPIPE</b>   |
| THIRD ANGLE PROJECTION  | MATERIAL: SEE NOTES   |                |   |
| <small>PROPRIETARY AND CONFIDENTIAL<br/>                 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.</small> | FINISH: SEE NOTES   |                | SIZE: <b>B</b> DWG. NO: <b>FLX3 XX</b> REV: <b>004</b>  |
|   | DO NOT SCALE DRAWING  |                | SCALE: 2:1 SHEET 1 OF 2   |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Light Pipes](#) category:*

*Click to view products by [Visual Communications Company](#) manufacturer:*

Other Similar products are found below :

[1367627-1](#) [SLP3-300-450-F](#) [SLP3-400-450-R](#) [LPA-C011301S-6](#) [LPF-C011306S](#) [FLP25-1.95](#) [VLP-640-F](#) [LPA-C011301S-5.4](#) [LPA-R051171S-12](#) [LPA-S011331S](#) [515-1027-803F](#) [515-1217F](#) [SLP3-150-300-R](#) [SLP3-500-450-R](#) [515-1064-810F](#) [FLPV-SG](#) [BDL-1187](#) [7511A41](#) [7511A87-500](#) [FLPV-SBC](#) [5151064802F](#) [5151-192-0055-0DF](#) [LPF-R011340S](#) [515-1166-801F](#) [FLPF-6.0](#) [PM4-C1522-3.70](#) [LC-11.25](#) [CLP-1214](#) [515-1064-808F](#) [FLX3\\_05](#) [515-1192-0025-0DF](#) [HS LC-H-D2/ R2XC1-2 54](#) [515-1192-80-3DF](#) [1282.2600](#) [1296.2004](#) [PBLP-1001-1](#) [SZ1-10.00-A220-F4P54](#) [SZ1-10.00-A220-F4P](#) [LC2-4.1](#) [1296.7042](#) [SF4-2.5-F5P](#) [PLP5-2-625-54](#) [FLP25-13.5](#) [1271.2002](#) [1272.0030](#) [1276.2004](#) [1281.1001-8MM](#) [1282.1300](#) [1296.1034](#) [1296.2022](#)