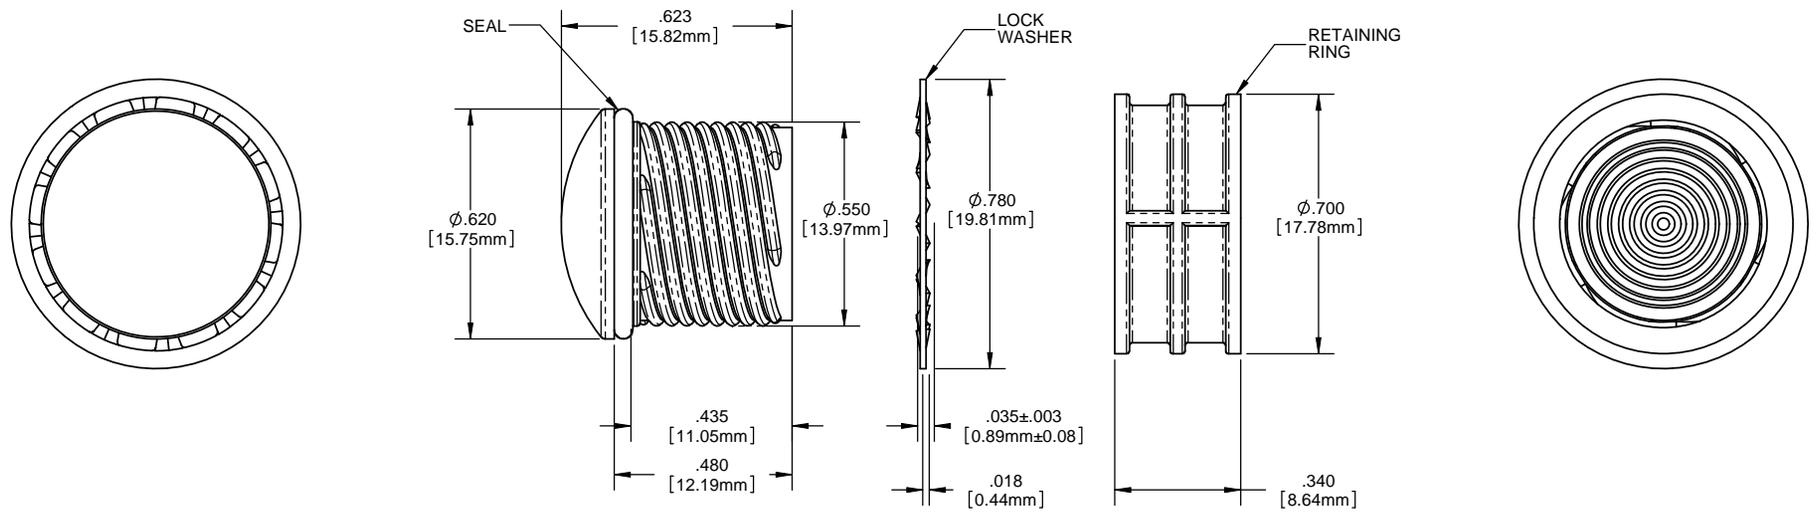NOTES:
1. MOUNTING: Mounts in a ⌀.562±.002 [⌀16.56mm±.05] panel hole on .750 [19.05mm] centers. Panel thickness .031 [.8mm] to .187 [4.75mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert lens through panel hole, slide lock washer onto lens barrel and twist on retaining ring. PCB mounted LEDs slide into lens when the panel cover is closed or the PCB card is inserted into the case.
3. MATERIAL: Lens-Polycarbonate, UL 94-V2
   Lock Washer- FH Steel, Nickel plate
   Retaining ring - Thermoplastic, U.L. 94 V0 Rated
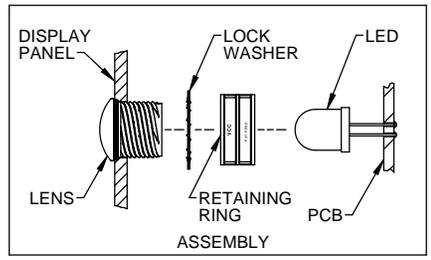   Seal- EPDM
4. U.S. & Foreign Pat. Issued & Pend.

SEAL
.623 [15.82mm]
LOCK WASHER
RETAINING RING
⌀.620 [15.75mm]
⌀.550 [13.97mm]
⌀.780 [19.81mm]
⌀.700 [17.78mm]
.435 [11.05mm]
.035±.003 [0.89mm±0.08]
.480 [12.19mm]
.018 [0.44mm]
.340 [8.64mm]

ORDERING CODE : HMS 462 XXX

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT

DISPLAY PANEL
LOCK WASHER
LED
LENS
RETAINING RING
PCB
ASSEMBLY

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lenses *category:*

Click to view products by Visual Communications Company *manufacturer:*

Other Similar products are found below :

139A-403R 2857 SSN-LX13049L-CD SSN-LX18754A SSN-LX18754C 2817 3122 39-30-W03 4623 4752 3121 3124 3125 4327 4371 4743 4747 4757 3113 4317 4342 4347 4343 4345 4346 CMC321YTP 4742 CMS444CTP 13788360933552 4745 SML190RTP 177-0931-003 177-0933-003 8652 8658 8662 8665 TL50LA1T SGLC-250-D YW SGLC-250-D BE SGLC-250-D GN SGLC-250-D RD SGLC-3MM-F YW SGLC-3MM-F RD SGLC-3MM-F BE SGLC-3MM-F SGLC-3MM-F GN 4344 080-0535-303 080-0512-203