

.230" PANEL MOUNT REFLECTOR

T-1, Water-Tight Optional

- Reflective Chrome-Plated Body - Mounting Hardware Provided - Maximum Panel Thickness .125"(PMRL125); .070"(PMRL125, Water-Tight)
 - For Detailed LED Data, See Discrete Section, MODEL 125

1	Model	Wires
	PMRL125	W (optional)

TO ORDER, FOLLOW THE EXAMPLE:

Select one **BOLD** component from each numbered category in the tables below.

1	Model	Wire	2	LED	3	Voltage	4	Water Tight
	PMRL125	W		-BCG		12H		

→Part Number **PMRL125W-BCG12H**

STANDARD INTENSITY - DIFFUSED ENCAPSULATION						
2	LED	Color	λ_{pk} (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table^[2]
	-BR	RED	635	14	60	I
	-BA	AMB	583	14	60	I
	-BG	GRN	565	14	60	I

MEDIUM INTENSITY - TINTED ENCAPSULATION						
2	LED	Color	λ_{pk} (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table^[2]
	-BCR	RED	635	60	45	I
	-BCA	AMB	583	30	45	I
	-BCG	GRN	565	44	45	I

HIGH INTENSITY - WATERCLEAR ENCAPSULATION						
2	LED	Color	λ_{pk} (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table^[2]
	-NWR	RED	634	2180	35	I
	-NWA	AMB	592	2180	35	I
	-NWG	GRN	520	2000	45	II
	-NWB	BLU	465	600	45	II
	-NWW	WHT	1100	1100	55	II

Voltage/Current	
Design Vf/If	Max Vf/If
V/C Table I	
5V/22mA	5.5V/28mA
12V/20mA	14V/25mA
15V/24mA	16.5V/28mA
24V/17mA	26V/20mA
28V/16.5mA	30V/18mA
48V/15mA	50V/16mA
60V/9mA	65V/10mA
120VAC/3.5mA	130VAC/4mA

Voltage/Current	
Design Vf/If	Max Vf/If
V/C Table II	
5V/15mA	5.5V/23mA
12V/15mA	14V/20mA
15V/15mA	16.5V/18mA
24V/15mA	26V/18mA
28V/15mA	30V/17mA
48V/9.5mA	50V/10mA
60V/7mA	65V/8mA
120VAC/3.5mA	130VAC/4mA

3	Voltage^[3]
	2
	5H
	12H
	15H
	24H
	28H
	48H
	60H
	120 ^[4]

4	Water Tight^[5]
	-WT (optional)

SPECIALTY LEDs - DIFFUSED ENCAPSULATION							
2	LED	Color	λ_{pk} (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table^[2]	Description
	-RLP ^[6]	RED	635	2.1	50	[2]	Low Power
	-ALP ^[6]	AMB	583	1.6	50	[2]	Low Power
	-GLP ^[6]	GRN	565	2.1	50	[2]	Low Power
	-RG	RED/GRN	630/565	5.0/5.0	72	I	Bi-Color, Red Cathode

[1] I_v = typical luminous intensity @ $I_f = 20mA (T_a = 25^\circ C)$. For Low Power LEDs, $I_f = 2mA$.

[2] See Voltage/Current table for design specifications. Design current for low power LEDs = 2mA.

[3] $T_a = 25^\circ C$. Voltage "2" indicates external resistor required. Voltages 5H through 60H are VDC. For AC operation, insert D after Voltage (e.g. 24HD). D indicates built-in rectifier, not required for 5H or 120VAC. DC operation not available for 120VAC. Bi-Color not available in AC voltages.


[4] Select high intensity LEDs only.

[5] Drip-proof (not submersible), supplied with two neoprene gaskets.

[6] Omit H when selecting a voltage (e.g. PMRL125-RLP12).



PMRL125

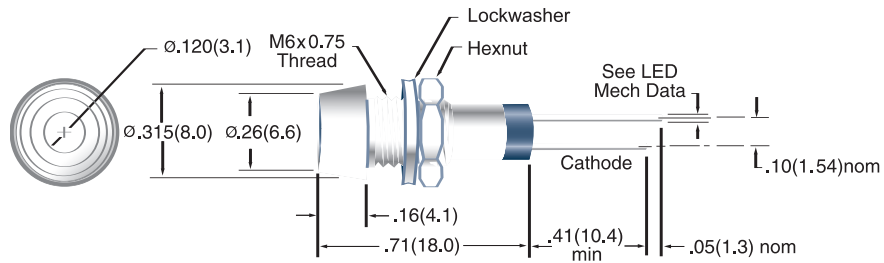

Standard Wire Leads:

6.0" total length(nominal)/.50" stripped (nominal), red anode/black cathode, 24 AWG TPB UL1061 insulation. Contact factory for other lengths, gauges and colors.

All dimensions are in inches (mm)

Tolerances: $.xx(.x) \pm .025(.63)$ / $.xxx(.xx) \pm .010(.25)$
 Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Panel Mount Indicators](#) category:

Click to view products by [Visual Communications Company](#) manufacturer:

Other Similar products are found below :

[607-3232-140F](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#) [FL2950WL8G](#) [FL589WL8R](#) [FL67C8R](#) [H8630FBBA3](#) [NL177WL2A](#)
[NL177WL3G](#) [NL276C2A](#) [NL2950BWL3G](#) [NL589WL2R](#) [NL67C2C](#) [NL67C3R](#) [C480AABG3](#) [PB22BM41K](#) [PB22SIM40Y](#)
[PB22SKRS31KC](#) [L32R-R2-2311](#) [L3353-MWRG](#) [L39UR-R24-2111](#) [L58D-G2-W](#) [L58D-Y2-W](#) [L59D-R12-W](#) [L59UD-R12-W](#) [L625DG](#)
[L625DR](#) [LE177WL39007](#) [LH1048BSWL3702](#) [LH1048BWL3702](#) [LH382A](#) [LH677G](#) [LHM628A](#) [FL276WL7R](#) [FL2950BWL7R](#)
[FL2950WL7R](#) [FL2950WL8R](#) [FL2950WL8R-12](#) [FL2951WL8G](#) [FL2951WL8R](#) [FL589C7R](#) [FL67WL8G](#) [MPC5BCW18.0](#) [556-1605-808F](#)
[556-1705-809F](#) [556-3008-839F](#) [558-0201-818F](#) [559-0001-813F](#) [559-1301-801F](#)