




Precision Power Wirewound Resistors, ceramic carrier, coated, axial

Specifications

Type		CR 251-0	CR 252-0	CR 253-0	CR 254-0	CR 255-0	CR 256-0	CR 257-0	CR 258-0	CR 259-0
Nominal Power rating P_{40} P_{70}	W	1,1 1,0	2,0 1,6	2,5 2,0	3,0 2,5	3,3 3,0	4,0 3,5	5,0 4,3	5,5 5,0	7,2 6,5
Resistance range	Ω	See Page 2								
Tolerances	%	Rmin. ...Rmax.: ± 5 , ± 2 , ± 1 ; $R \geq 1R$: $\pm 0,5$								
Temperature coefficient	$10^{-6} \cdot K^{-1}$	See Page 2								
Max. working voltage	V_{RMS}	$\sqrt{P_{70} \cdot R}$								
Insulation voltage (1min.)	V_{RMS}	max 75 V								
Insulation resistance	Ω	not insulated								
Derating linear	$^{\circ}C$	70...350 (0W)								
Climatic category		55/200/56								
Temperature range	$^{\circ}C$	-55 ~ 350								
Thermal resistance	KW^{-1}	125	100	85	65	55	65	48	45	35
Failure Rate (Total, ϑ_0 , max, 60% cont. lev.)	$10^{-9} h^{-1}$	appr. 100 depends on value								
Endurance (P_{70} , 70 $^{\circ}C$, 1000h)	$[\Delta R/R] \%$	$\pm 3,0$ average								
Damp heat, steady state (40 $^{\circ}C$, 93% r.h., 56d)	$[\Delta R/R] \%$	$\pm 1,0$								
Climatic sequence (IEX 115-1/23)	$[\Delta R/R] \%$	$\pm 1,0$								
Terminal strength	$[\Delta R/R] \%$	$\pm 0,2$								
Terminal Tensile Strength	N	40								50
Resistance to soldering heat (260 $^{\circ}C$, 3,5s)	$[\Delta R/R] \%$	$\pm 0,2$ typ.								
Solderability	s	2,5 Flowtime; solderglobule test, IEC 60068-2-20-T								
Marking		Printed in clear								

Dimensions in mm:

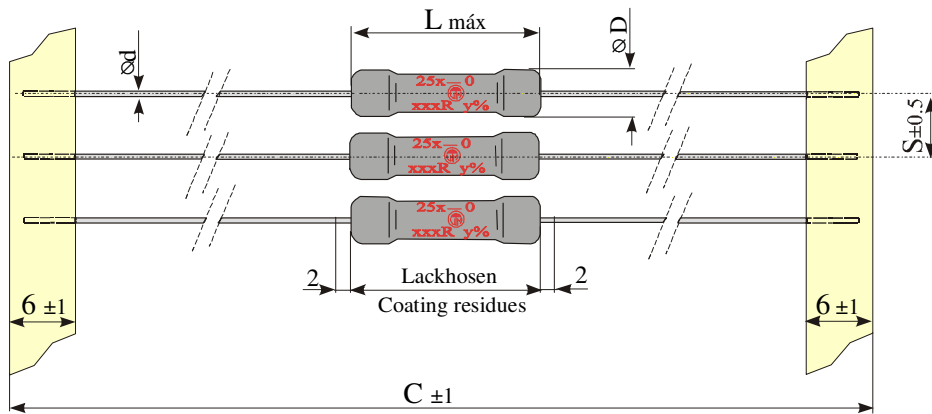

Type	Temperature Coefficient (-20°C to 120°C)									
	500 +400 ppm/K		400 ± 50 ppm/K		appr. +180 ppm/K		0 ± 20 ppm/K		0 ± 10 ppm/K	
251-0	-----	-----	≥ 0R01	≤ 0R024	≥ 0R027	≤ 0R091	≥ 0R1	≤ 15R	≥ 16R	≤ 220R
252-0	≥ 0R022	≤ 0R033	≥ 0R036	≤ 0R062	≥ 0R068	≤ 0R091	≥ 0R1	≥ 160R	≥ 180R	≤ 470R
253-0	≥ 0R01	≤ 0R02	≥ 0R022	≤ 0R047	≥ 0R051	≤ 0R091	≥ 0R1	≤ 47R	≥ 51R	≤ 750R
254-0	≥ 0R01	≤ 0R027	≥ 0R03	≤ 0R075	≥ 0R082	≤ 0R091	≥ 0R1	≤ 47R	≥ 51R	≤ 750R
255-0	≥ 0R015	≤ 0R024	≥ 0R027	≤ 0R062	≥ 0R068	≤ 0R091	≥ 0R1	≤ 68R	≥ 75R	≤ 1K0
256-0	≥ 0R02	≤ 0R03	≥ 0R033	≤ 0R062	≥ 0R068	≤ 0R091	≥ 0R1	≤ 130R	≥ 150R	≤ 1K5
257-0	≥ 0R027	≤ 0R047	≥ 0R051	≤ 0R082	≥ 0R091	≤ 0R13	≥ 0R15	≤ 150R	≥ 160R	≤ 2K2
258-0	≥ 0R033	≤ 0R062	≥ 0R068	≤ 0R13	≥ 0R15	≤ 0R16	≥ 0R18	≤ 160R	≥ 180R	≤ 2K7
259-0	≥ 0R047	≤ 0R075	≥ 0R082	≤ 0R15	≥ 0R16	≤ 0R24	≥ 0R27	≤ 180R	≥ 200R	≤ 3K9

Type	L max	ØD * max	Ød
CR251-0	9,0	3,0	0,65
CR252-0	9,7	4,0	0,80
CR253-0	14,5	4,5	0,65
CR254-0	12,6	5,5	0,80
CR255-0	15,0	8,5	0,80
CR256-0	17,0	5,5	0,80
CR257-0	18,0	8,5	0,80
CR258-0	22,0	8,5	0,80
CR259-0	27,0	8,5	0,80

*R ≤ 1R0 Dmax. +1

Packaging:

Type	Packaging	Pieces	Pack.-code	C	s
CR251-0	taped	1000	T	65	5
CR252-0	taped	1000	T	65	5
CR253-0	taped	1000	T	85	10
CR254-0	taped	1000	T	85	10
CR255-0	taped	500	T	85	10
CR256-0	taped	1000	T	85	10
CR257-0	taped	500	T	85	10
CR258-0	taped	500	T	85	10
CR259-0	taped	500	T	85	10

Ordering example: CR259-0 1 T 10R
 Type Tolerance Pack-Code R- value

Revision 200906

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Carbon Film Resistors - Through Hole](#) category:

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[150-04720](#) [OMT200L](#) [ON2725E](#) [CFR16J1K0](#) [CFR50J8K2](#) [CFS1/2C512J](#) [CFR200J120R](#) [CFR25J3M9](#) [CFR25J6R8](#) [CFR25J75R](#) [CFS1/4 C](#)
[100 J](#) [CFR50J3M3](#) [OB1065](#) [OH4315](#) [LCA0207004701JD500](#) [LCA0207001002J2500](#) [LCA0207004701J2500](#) [LCA0414004700J2100](#)
[CFR200G220R](#) [291-0.82-RC](#) [150-01011](#) [MFR5-560KFI](#) [Z16LT52R](#) [MFS14CC3300F](#) [MFS1/4CC6201F](#) [MFS1/4CC68R0F](#)
[RNR55C3321FSM76](#) [MRS25000C1741FC100](#) [RWR80S1821FRB12](#) [RWR81S24R9FRS73](#) [RWR89S1000FRS73](#) [NMO100J273TRF](#) [CFR-](#)
[25JB-52-4K3](#) [CFR-25JB-52-4R7](#) [CFR-50JB-52-4R7](#) [SPR1C391J](#) [SPR1CT52A472J](#) [SPR1CT52R1002F](#) [SPR1CT52R100J](#) [SPR1CT52R102J](#)
[SPR1CT52R103J](#) [SPR1CT52R220J](#) [SPR1CT52R222J](#) [SPR1CT52R332J](#) [SPR1CT52R471J](#) [SPR1CT52R561J](#) [SPR2C103J](#) [SPR2C183J](#)
[SPR2C680J](#) [SPR2CT521R181J](#)