


Power Wirewound Resistors  
radial, fibre glass core, coated




### Specifications

Type		KP290	KP292	KP294	KP296	KP298
Styles		0518	0523	0533	0543	0553
Power rating $P_{70}$	W	2,0	4,0	5,0	6,5	8,0
Resistance range	$\Omega$	0R1 ... 7K5	0R15 ... 11K	0R27 ... 20K	0R39 ... 27K	0R47 ... 36K
E-Series		E 24/E 12	E 24/E 12	E 24/E 12	E 24/E 12	E 24/E 12
Tolerances	%	$\pm 10$ $\pm 5 \geq 0R2$	$\pm 10$ $\pm 5 \geq 0R3$	$\pm 10$ $\pm 5 \geq 0R47$	$\pm 10$ $\pm 5 \geq 0R68$	$\pm 10$ $\pm 5 \geq 0R91$
Temperature coefficient	$10^{-6} \cdot K^{-1}$		- 80 ... + 500			
max. cont. work. voltage	$V_{RMS}$		$\sqrt{P_{70} \cdot R}$ for all styles			
Insulation voltage (1min.)	$V_{RMS}$		max 75			
Insulation resistance	$\Omega$		not insulated			
Derating linear	$^{\circ}C$		70 ... 350 (0W)			
Climatic category			55/200/56			
Temperature range	$^{\circ}C$		- 55 ... 350			
Thermal resistance	$KW^{-1}$	110	70	60	50	40
Failure rate (Total, $\vartheta_0$ , max., 60% conf. lev.)	$10^{-9} \cdot h^{-1}$		appr. 100, depends on value			
Endurance ( $P_{70}$ , 70 $^{\circ}C$ , 1000)	$\left[\frac{\Delta R}{R}\right] \%$		$\pm 3,0$ average			
Damp heat, steady state (40 $^{\circ}C$ , 93% r.h., 56d)	$\left[\frac{\Delta R}{R}\right] \%$		$\pm 2,0$			
Climatic sequence	$\left[\frac{\Delta R}{R}\right] \%$		$\pm 2,0$			
Terminal strength	$\left[\frac{\Delta R}{R}\right] \%$		$\pm 1,0$			
Terminal tensile strength	N		40			
Resistance to soldering heat (260 $^{\circ}C$ , 10s)	$\left[\frac{\Delta R}{R}\right] \%$		$\pm 0,2$ typ.			
Solderability	s	solderable according to IEC 60068-2-20 Ta				
Marking		on termination; value 3 digits, Tolerance, Production date code				


Dimensions in mm:



Type 290-0... 298-0





Type 290-1... 298-1



Type	L	RM
KP290-0/1	18,2	10
KP292-0/1	23,3	15
KP294-0/1	33,4	25
KP296-0/1	43,5	35
KP298-0/1	53,7	45

Type	RM Tolerance	Xmax.
KP29x-0	+1,0	3,0
KP29x-1	+0,8	1,7

Temperature rise:  
(solder joints)

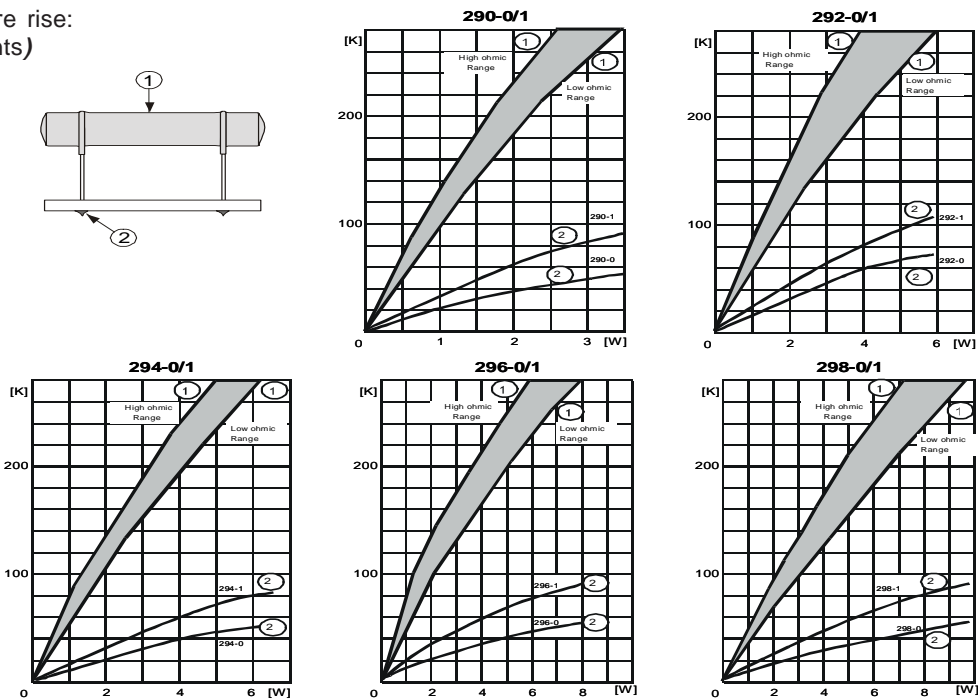

Packaging:

Type	Packaging	Pieces	Pack.-Code
KP290-0	bulk	500	B
KP290-1	bulk	1000	B
KP292-0	bulk	500	B
KP292-1	bulk	1000	B
KP294-0	bulk	250	B
KP294-1	bulk	500	B
KP296-0	bulk	250	B
KP296-1	bulk	500	B
KP298-0	bulk	250	B
KP298-1	bulk	250	B

Ordering example: KP294-1      5      B      1K3  
 Type      Tolerance      Pack.-Code      R-Value

Revision 200807

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Metal Film Resistors - Through Hole](#) category:*

*Click to view products by [Vishay](#) manufacturer:*

Other Similar products are found below :

[FRN25J330R](#) [FRN50J1R0S](#) [H4100RBYA](#) [H415RBZA](#) [H41K1BYA](#) [H41K5BYA](#) [H41M0BDA](#) [H420R5BCA](#) [H421R5BZA](#) [H4221RBYA](#)  
[H424K3BDA](#) [H442K2BDA](#) [H45K62BZA](#) [H4634RBZA](#) [H473R2BZA](#) [H4931KBZA](#) [H8160KFDA](#) [H8274KBZA](#) [H82K0FDA](#) [H82K0FZA](#)  
[H87K5DYA](#) [RLR05C1501GPB14](#) [RLR05C6201GS](#) [RLR20C3240FRB14](#) [RLR20C51R0GMB14](#) [RLR32C7R50FMB14](#) [RNC55H4642FPB14](#)  
[HR01623J](#) [HR01682J](#) [270-1.69M-RC](#) [LR0204F110R](#) [LR0204F18R](#) [LR0204F20K](#) [LR0204F20R](#) [LR0204F510R](#) [LR1F121R](#) [LR1F133K](#)  
[LR1F383R](#) [LR1F3K01](#) [LR1F4K75](#) [LR2F330RJIT](#) [LR2F51R](#) [LR2F910R](#) [ERX-2SZJR20E](#) [SQMR74K7J](#) [FMF-25FTF52-100K](#) [FRN25J47R](#)  
[FRN50J100RS](#) [FRN50J470RS](#) [H4100RBZA](#)