




Specifications

Type		SLR2 SLP2	SLR3 SLP3	SLR5 SLP5	SLR5B SLP5B	SLR7 SLP7	SLR7B SLP7B	SLR10 SLP10	SLR10A SLP10A	SLR22B SLP22B	SLR33 SLP33	SLR33B SLP33B	SLR55 SLP55
Power rating P_{70}	W	see next page											
Resistance range	Ω	see next page											
Tolerances	%	10% (K) standard 5% (J) on request											
Temperature coefficient	$10^{-6} \cdot K^{-1}$	± 250											
max. cont. work. voltage	V_{RMS}	$\sqrt{P_{70} \cdot R}$											
Insulation voltage	V_{RMS}	$> 700 V$											
Insulation resistance	Ω	$\geq 1G$											
Derating linear	$^{\circ}C$	70 ... 150											
Climatic category		25 / 155 / 21											
Temperature range	$^{\circ}C$	- 25 ~ 155											
Short time overload	$\left[\frac{AR}{R}\right] \%$	$\pm (1\% R+0.05\Omega)$											
Load Life $P_{70^{\circ}C}$ (70 $^{\circ}C$ 1000h, 1.5h "ON", 0.5h "OFF")	$\left[\frac{AR}{R}\right] \%$	$\pm (5\% R+0.1\Omega)$											
Damp heat, steady state (40 $^{\circ}C$, 95% r.h., 21d)	$\left[\frac{AR}{R}\right] \%$	$\pm (5\% R+0.1\Omega)$											
Terminal tensile strength	$\left[\frac{AR}{R}\right] \%$	$\pm (1\% R+0.05\Omega)$											
Resistance to soldering heat (350 $^{\circ}C$, 3.5s)		$\pm (1\% R+0.05\Omega) .$											
Solderability IEC 60068-2-20 260 $^{\circ}C$, Solder bath	s	2 ± 0.5											
Marking		printed in clear											

Ordering example: SLR2 10 B 0R1
 Type Tolerance Pack.-Code R-Value

Dimensions in mm:

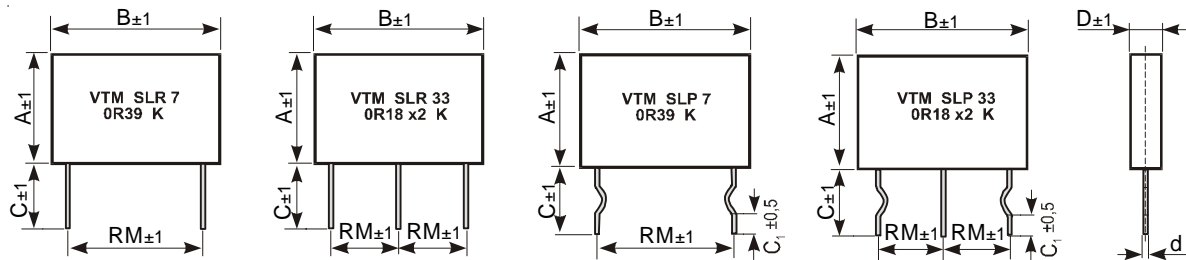

Type	Rated power $P_{70^{\circ}\text{C}}$	Resistance range		Dimensions (mm)								Packaging	
		Min.	Max.	A	B	C (SLR)	C (SLP)	C_1 (SLP)	D	d	RM	Pieces / Box	
												SLR	SLP
SLR2 / SLP2	2	0R01	1R	8	13	12	10	4	5	0.6	9	300	300
SLR3 / SLP3	3	0R05	1R	13	13	12	10	4	5	0.6	8	230	230
SLR5 / SLP5	5	0R01	3R3	18	14	12	10	4	5	0.6	10	180	180
SLR5B / SLP5B	5	0R05	3R3	10	26	12	10	4	5	0.8	20	160	160
SLR7 / SLP7	7	0R05	3R3	18	26	12	10	4	5	0.8	20	100	100
SLR7B / SLP7B	7	0R05	3R3	13	26	12	10	4	5	0.8	20	130	130
SLR10 / SLP10	10	0R05	3R3	20	26	12	10	4	5	0.8	20	100	100
SLR10A / SLP10A	10	0R05	3R3	19	26	12	10	4	5.5	0.8	20	100	100
SLR22B / SLP22B	2+2	0R1+0R1	0R33+0R33	10	26	12	10	4	5	0.8	10	160	160
SLR33 / SLP33	3+3	0R1+0R1	0R5+0R5	18	26	12	10	4	5	0.8	10	100	100
SLR33B / SLP33B	3+3	0R1+0R1	0R5+0R5	13	26	12	10	4	5	0.8	10	130	130
SLR55 / SLP55	5+5	0R1+0R1	1R8+1R8	20	26	12	10	4	5	0.8	10	100	100

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wirewound Resistors - Through Hole category](#):

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[75822-2K4](#) [90J56R](#) [AC03000001208JAC00](#) [EP3WS47RJ](#) [C1010KJL](#) [C1015RJL](#) [C3A10KJT](#) [27J1K0](#) [ES3W47RJ](#) [AC04000001500JAC00](#)
[AC10000002208JAB00](#) [AC10000004708JAB00](#) [SQMW5R39J](#) [SQPW5R22J](#) [SQPW5R33J](#) [1879927-3](#) [FCB2100RJ](#) [T505](#) [FSQ5WR47J](#)
[FW10A33R0JA](#) [CPCC03R5000JB31](#) [CPCC0510R00JE32](#) [CPCC051R000JB31](#) [CPCP10500R0JE32](#) [CPW05700R0JE143](#)
[CPW152K500JE313](#) [C1010RJL](#) [C10R47JL](#) [C141K0JL](#) [C144R7JL](#) [ES05W100RJ](#) [SQMW1047RJ](#) [SQMW210RJ](#) [CPCC03R2000JB31](#)
[CPCC0515R00JE01](#) [CPW055R000JB143](#) [CPW103K300JE143](#) [CPW202R000JB14](#) [ULW5-39R0JT075](#) [W31-R47JA1](#) [ULW5-68RJT075](#)
[SQBW401K0JFASTON](#) [SPH1001JLF](#) [65888-3R3](#) [CPCC10R5100JE66](#) [SQP500JB-400R](#) [SQBW403R3JFASTON](#) [280-PRM7-4.7-RC](#)
[CW02B9R100JE73](#) [CPCP05R1000JE32](#)