

221 SERIES *LEVER-NUTS*[®]

The Next Generation of Compact Splicing Connectors



**WE
INNOVATE!**



WAGO[®]

40% SMALLER 100




WWW.WAGO.COM/221

WAGO 221: COMPACT Splicing Connectors for All Wire Types

Setting new standards in electrical installations, WAGO's new 'all-around' connector is smaller and even more user friendly than its successful predecessor, the 222 Series.


The 221 Series *LEVER-NUTS*® user can:

- Connect any combination of solid, stranded, and flexible copper wires faster and more reliably
- Minimize space consumption in the junction box – by 40% compared to 222 Series
- Visually inspect for proper strip length and complete wire insertion through its transparent housing
- Operate comfortably and with lower operating forces by using familiar orange levers

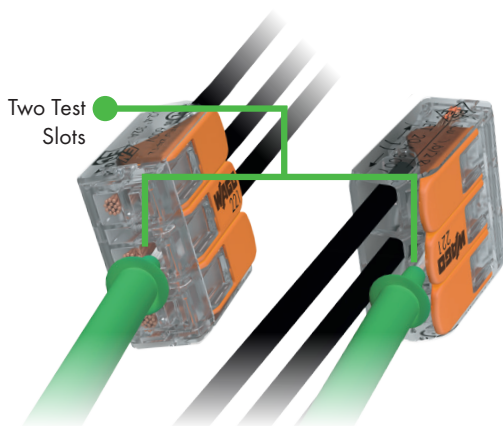


Wire Inserted Properly

Wire Stripped Properly

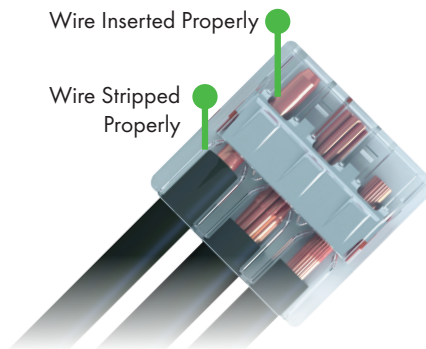







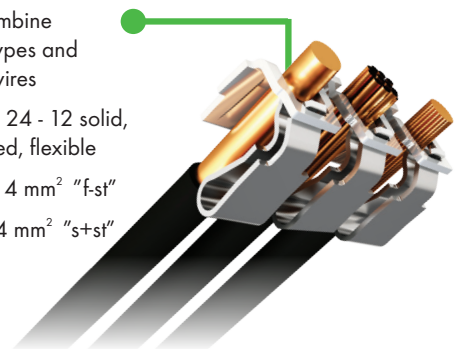


Easily combine various types and sizes of wires

- AWG 24 - 12 solid, stranded, flexible
- 0.14 - 4 mm² "f-st"
- 0.2 - 4 mm² "s+st"




100% TRANSPARENT

AWG 24 - 12 600 V 105 °C operating temp  11mm / 0.43 in	0.14 - 4 mm ² "f - st" 0.2 - 4 mm ² "s + st" 400 V / 4 kv / 2 I _N 32A	AWG 24 - 12 600 V 105 °C operating temp  11mm / 0.43 in	0.14 - 4 mm ² "f - st" 0.2 - 4 mm ² "s + st" 400 V / 4 kv / 2 I _N 32A	AWG 24 - 12 600 V 105 °C operating temp  11mm / 0.43 in	0.14 - 4 mm ² "f - st" 0.2 - 4 mm ² "s + st" 400 V / 4 kv / 2 I _N 32A
					
2 - conductor connector, with levers		3 - conductor connector, with levers		5 - conductor connector, with levers	
Item No.	Pack Unit (subpack unit)	Item No.	Pack Unit (subpack unit)	Item No.	Pack Unit (subpack unit)
221-412	1000(10x100)	221-413	500(10 x 50)	221-415	250(10 x 25)
221 - 412 / VE00 - 2500	2500 (bulk)	221 - 413 / VE00 - 2500	2500 (bulk)	221 - 415 / VE00 - 1000	1000 (bulk)
					



- Nominal current: 20 A
- Nominal voltage: 600 V
- Operating temperature: 105 °C

How it Works

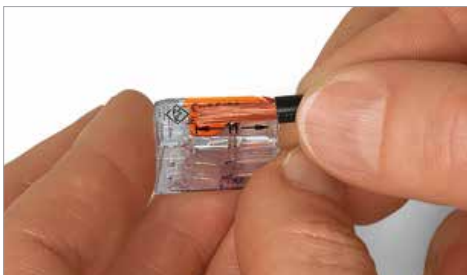

Strip conductor to 11mm - refer to strip length guide printed on side of connector



Lift lever to open clamping unit; insert stripped conductor



Lower the lever to close the clamping unit

WE! INNOVATE!



WAGO Corporation

N120 W19129 Freistadt Road
Germantown, Wisconsin 53022
Telephone: 800 / DIN Rail (346-7245)
Fax: 262 / 255-3232
info.us@wago.com
www.wago.us

Canada

WAGO Corporation
Tel. 800/DIN Rail (346-7245)
Fax 262/255-3232
www.wago.ca

Mexico

WAGO Corporation
Queretaro
Tel. 001/800/309/5975
+ 52/442/221/5946
Fax + 52/442/221/5063
www.wago.mx

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wago manufacturer](#):

Other Similar products are found below :

[734-190](#) [750-460](#) [209-574](#) [231-118/026-000](#) [231-620/019-000](#) [250-209](#) [2734-108/037-000](#) [280-438](#) [285-135](#) [231-446/001-000_NR](#) [232-216/026-000](#) [264-726](#) [2010-1207](#) [2001-1207](#) [830-800/000-305](#) [811-421](#) [2006-1661](#) [750-960](#) [750-530](#) [210-197](#) [248-504](#) [731-138/048-000](#) [750-604](#) [773-108](#) [793-5666](#) [811-317](#) [811-411](#) [857-415](#) [255-406](#) [280-675](#) [285-407](#) [0745-0302](#) [2060-473/998-404](#) [830-1000/000-000](#) [2000-5372](#) [769-412](#) [221-525](#) [852-1417](#) [2636-3105/020-000](#) [2009-110](#) [231-332/108-000](#) [281-512/281-501](#) [750-421](#) [750-842](#) [769-615](#) [753-437](#) [2009-145](#) [852-1322](#) [852-1328](#) [852-1605](#)