


Data sheet



Item no.:	231-304/026-000
Product description:	FEMALE CONNECTOR 4 POLE PIN SPACING 5.08 MM / 0.2 IN WITH CODING FINGERS WITH INTEGRATED FIXING FLANGES CAGE CLAMP®CONNECTION

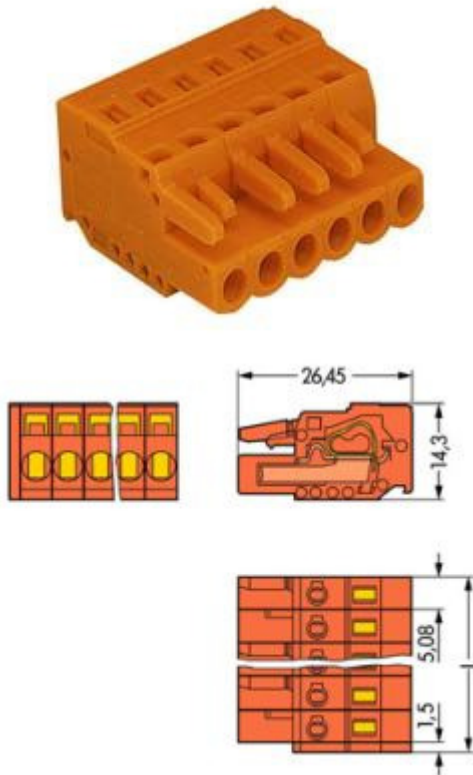

Packing unit 100 pieces

Product group	3 (Multi Conn. System)
Weight	7.35 g
Color	orange
No. of connection Points	4
No. of potentials	4
pole count	4
Height	14.3 mm
Height	0.563 in
Width	21.82 mm
Width	0.859 in
Depth	26.45 mm

Depth	1.041 in
Pin spacing from	5.08 mm
Pin spacing from	0.2 in
Pollution degree	2
Measured voltage EN	320 V
Measured shock voltage	4 kV
Current intensity EN	16 A
Pollution degree	2
Measured voltage EN	630 V
Measured shock voltage	4 kV
Current intensity EN	16 A
Connection method	CAGE CLAMP® CONNECTION
Cross section [mm ²]	0.08 - 2.5 mm ²
Wiring method	solid
Cross section [mm ²]	0.08 - 2.5 mm ²
Cross section [mm ²]	0.25 - 1.5 mm ²
Cross section [mm ²]	0.25 - 2.5 mm ²
Cross section [AWG]	28 - 12 AWG
Strip length from	8 mm
Strip length to	9 mm
Material group	I
xxx-xxx/033-000	Strain relief plate 20 mm

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wago](#) manufacturer:

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [750-602](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1105](#) [2604-1106](#) [2604-1504](#) [2624-1103](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#) [750-1505](#) [787-732](#) [753-437](#) [2091-1425/005-000](#)