


PCB Terminal Strips with Push-buttons 1.5 mm²

Pin Spacing: 5 mm, 7.5 mm

250 Series

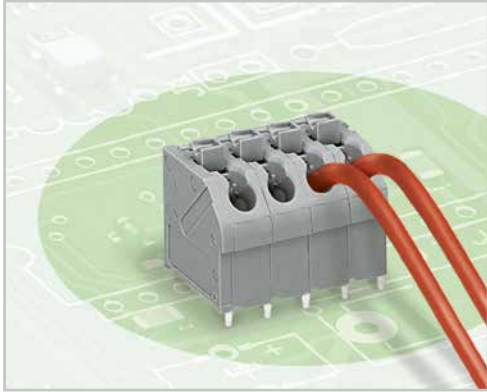

- Compact PCB terminal strips with push-buttons
- Simple, push-in terminations of solid and ferruled conductors
- Push-button operation for connecting of fine-stranded conductors and removing of conductors
- 45° conductor entry angle provides easy, space-saving wiring

Technical data:

Pin Spacing	5 mm 0.197 in.			7.5 mm 0.295 in.		
	IEC/EN 60664-1			IEC/EN 60664-1		
Ratings per						
Overtoltage category	III	III	II	III	III	II
Pollution degree	3	2	2	3	2	2
Rated voltage	320 V	320 V	630 V	500 V	630 V	1000 V
Rated surge voltage	4 kV	4 kV	4 kV	6 kV	6 kV	6 kV
Nominal current	17.5A	17.5A	17.5A	17.5A	17.5A	17.5A
Approvals per	UL/CSA			UL/CSA		
Use group UL1059	B	C	D	B	C	D
Rated voltage	300 V	-	300 V	300 V	-	300 V
Nominal current UL	2 A	-	2 A	2 A	-	2 A
Nominal current CSA	10 A	-	10 A	10 A	-	10 A

Conductor and solder pin data:


Connection technology	Push-in CAGE CLAMP®
Conductor size: solid	0.5 ... 1.5 mm ²
Conductor size: fine-stranded	0.5 mm ² /20 AWG (I max. 2 A)
Conductor size: fine-stranded	0.75 ... 1.5 mm ² (I max. 4 A)
Conductor size: fine-stranded	0.5 ... 1 mm ² (with insulated ferrule)
Conductor size: fine-stranded	0.5 ... 1 mm ² (with uninsulated ferrule)
AWG	20 ... 16 (20 ... 14 "sol.")
Strip length	9 ... 10 mm / 0.35 ... 0.39 in.
Conductor entry angle	45° to PCB
Solder pin: length/width	4 mm / 0.5 x 0.75 mm
Solder pin: drilled hole diameter	1.2 ^{-0.1} mm

Material data:

Material group	I
Insulating material	Polyamide 46 (PA 46)
Flammability class per UL 94	V0
Lower/Upper limit temperature	-60 °C / +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	tin-plated

Current-Carrying Capacity Curve

Pin spacing: 5 mm / Conductor size: 1.5 mm² "sol."
Based on: EN 60512-5-2 / Reduction factor: 1

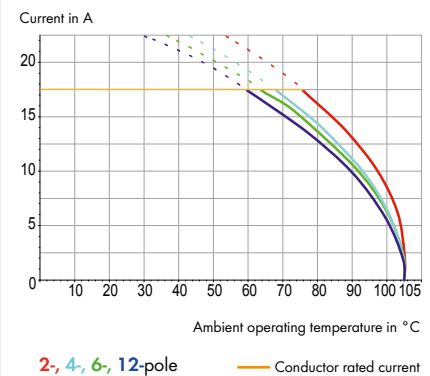

250 Series accessories:

Page:

Marking accessories	570
Operating tools	556
Test pin	568

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wago manufacturer](#):

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#) [750-1505](#) [787-732](#)