


0.08 ... 2.5 mm ² 800 V/8 kV/3 ① I _N 24 A Terminal block width 6 mm / 0.236 in. 8 ... 9 mm / 0.33 in. ②	AWG 28 ... 12 * 300 V, 20 A ③ 600 V, 20 A ④	0.08 ... 2.5 mm ² 800 V/8 kV/3 ① I _N 24 A Terminal block width 10 mm / 0.394 in. 8 ... 9 mm / 0.33 in. ②	AWG 28 ... 12 * 300 V, 20 A ③ 600 V, 20 A ④
---	---	--	---



- * AWG 12: THHN, THWN
- ① 800 V = rated voltage
8 kV = rated surge voltage
3 = pollution degree
(also see Section 14)
- ② Strip length, see packaging or instructions.
- ③ Suitable for Ex i applications
- ④ Suitable for Ex e II applications
0.5 mm² ... 2.5 mm²/AWG 20 ... 12*
690 V, 23 A
(also see Section 14)
- ⑤ See application notes for:
Alternate comb-style jumper bar, page 294
Test plug module, page 416
Miniature WSB, page 542

Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit
2-conductor center terminal block, required between end plate and end terminal block for terminal strips with fixing flanges			4-conductor center terminal block, required for terminal strips with fixing flanges between end plate and end terminal block		
gray	264-321	100	gray	264-351	100
blue	264-324 ③	100	blue	264-354 ③	100
orange	264-326	100	orange	264-356	100
green-yellow	264-327	100	green-yellow	264-357	100
light gray ⑤	264-131 ④	100	light gray ⑤	264-231 ④	100
2-conductor end terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø			4-conductor end terminal block with fixing flange, for screw or similar mounting types, fixing hole 3.2 mm Ø		
gray	264-301	100	gray	264-331	100
blue	264-304 ③	100	blue	264-334 ③	100
orange	264-306	100	orange	264-336	100
green-yellow	264-307	100	green-yellow	264-337	100
light gray ⑤	264-130 ④	100	light gray ⑤	264-230 ④	100

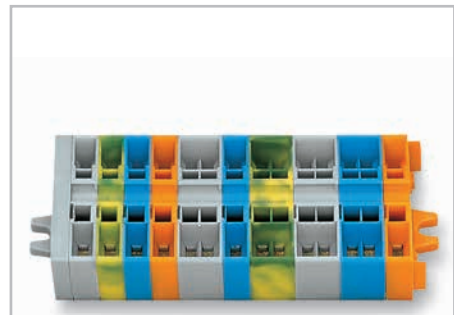

Terminal strip with fixing flanges, consisting of:
- End plate with fixing flange
- Center terminal blocks
- End terminal block with fixing flange

Item-Specific Accessories			Item-Specific Accessories		
⑤	Alternate comb-style jumper bar, insulated, I _N = I _N terminal block 2-way	281-492 100 (4x25)	⑤	Alternate comb-style jumper bar, insulated, I _N = I _N terminal block 2-way	280-492 200 (8x25)
⑤	Test plug module, can be snapped together, 6 mm wide gray	249-136 100 (4x25)	⑤	Test plug module, can be snapped together, 10 mm wide gray	249-139 100 (4x25)
⑤	Miniature WSB Quick marking system, 10 strips with 10 markers per card, 5 mm wide markers plain	248-501 5	⑤	Miniature WSB Quick marking system, 10 strips with 10 markers per card, 5 mm wide markers	264-900 5

264 Series Accessories					
Appropriate marking systems: Miniature WSB/T-marker tag (see Section 13)					
End plate with fixing flange, 4 mm thick			Test plug,		
gray	264-361	25	with 500 mm cable, 2 mm Ø		
orange	264-364	25	red	210-136	50
light gray	264-363	25			
Comb-style jumper bar, insulated, I_N 16 A, gray, reduces maximum conductor size to 1.5 mm²/AWG 16			Test plug,		
2-way	264-402	200 (8x25)	with 500 mm cable, 2.3 mm Ø		
			yellow	210-137	50
Operating tool, of insulating material			T marker tag,		
2-way	280-432	1	30 markers each tag, up to 6 characters per marker		
			plain	209-290	50

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wago manufacturer](#):

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#) [750-1505](#) [787-732](#)