

Printview: Male connector; 2-pole; pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact - Item No.: 721-602

**WAGO**® online catalog / eShop

**Male connector; 2-pole; pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact**

Item No.: 721-602



Male connector; 2-pole; pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	721-602
GTIN / EAN	4044918261623
Content	1
Order amount	100
Customer item number	

### Notes

Universal connection for all conductor types  
Easy cable pre-assembly and on-unit wiring via vertical and horizontal  
CAGE CLAMP® actuation  
For "wire-to-wire" and "board-to-wire" connections  
Optional, preceding ground contact available for 3- to 5-pole male connectors  
100% protected against mismatching  
Coding option available

### Technical data

#### Miscellaneous


No. of poles	2
Pin Spacing	5 mm / 0.197 in %
Total number of connection points	2
Total number of potentials	2
Color	light gray
Ratings according to 1	IEC/EN 60664-1


<b>Technical data</b>	
Overvoltage category EN 1	III
Pollution degree (1)	2
Rated voltage EN (1) [V]	320 [V]
Rated surge voltage (1) [kV]	4 [kV]
Nominal current [A]	12 [A]
Overvoltage category EN 2	II
Degree of pollution (2)	2
Rated voltage EN (2) [V]	630 [V]
Rated surge voltage (2) [kV]	4 [kV]
Nominal current (2) [A]	12 [A]
Overvoltage category EN 3	III
Degree of pollution (3)	3
Rated voltage EN (3) [V]	320 [V]
Rated surge voltage (3) [kV]	4 [kV]
Nominal current (3) [A]	12 [A]
Number of individual connection objects at the product	1
Connection technology (1)	CAGE CLAMP®
Solid sizes 1	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded wires 1	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded wires with insulated ferrule 1	0.25 ... 1.5 mm <sup>2</sup> / ...
Fine-stranded wires with uninsulated ferrule 1	0.25 ... 2.5 mm <sup>2</sup> / ...
Strip length 1	8 ... 9 mm / 0.31 ... 0.35 in
Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability rating per UL 94	V0
Limit temperature range	-60 C ... 100 C
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (Ecu)
Contact plating	tin-plated
Fire load [MJ]	0.066 [MJ]
Weight [g]	3.42 [g]
Width	13.2 mm / 0.52 in
Height	14.3 mm / 0.563 in
Length	27.5 mm / 1.083 in

Printview: Male connector; 2-pole; pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact - Item No.: 721-602

---

**Images & drawings**

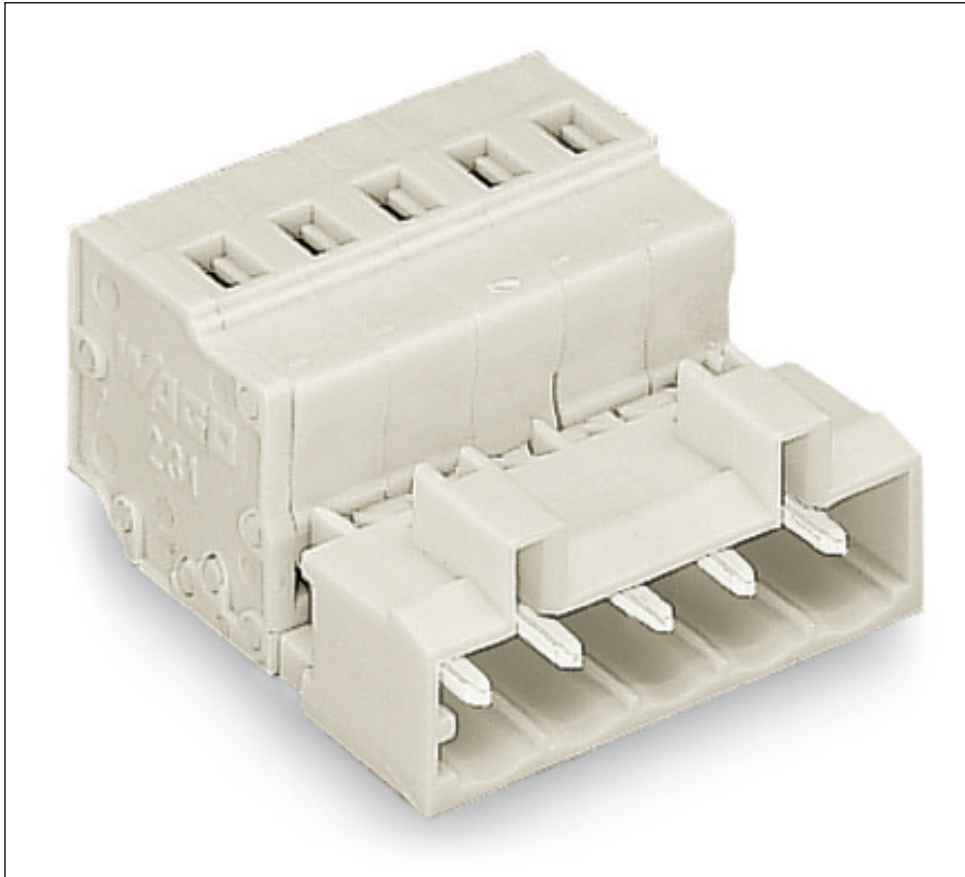

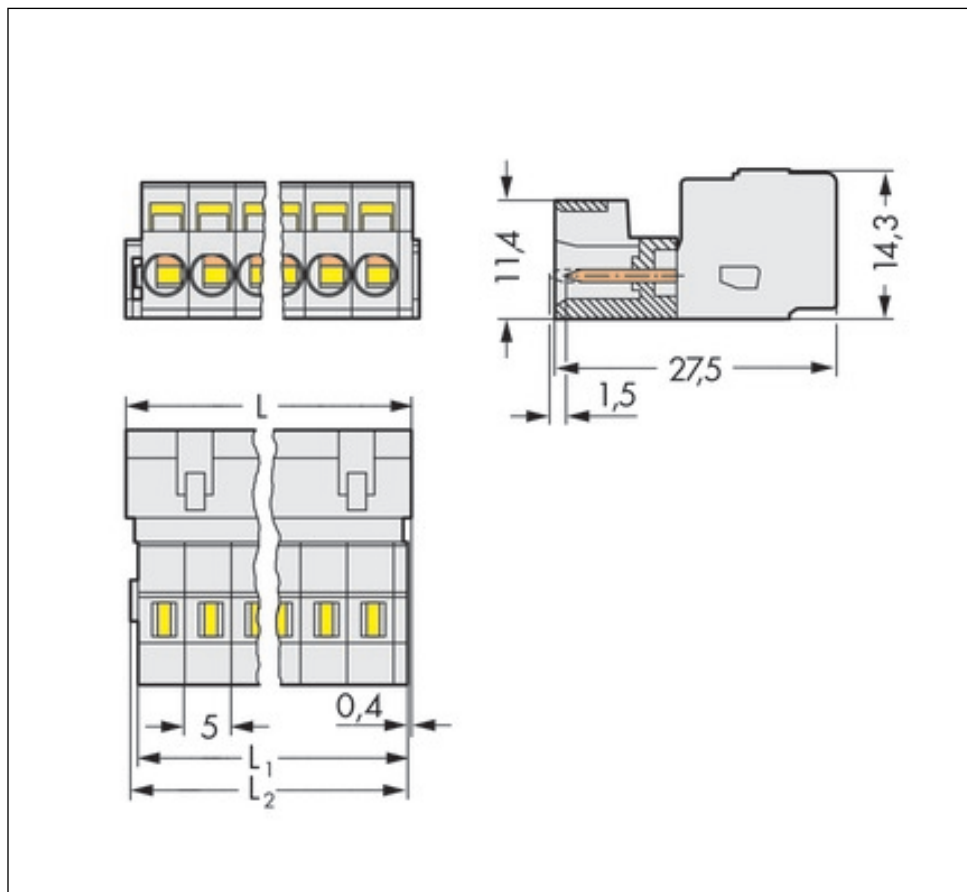

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [Wago](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)  
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)  
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#) [21.310.1253.2](#)  
[25.193.0303.0](#) [25.320.1353.1](#) [25.320.4053.1](#) [25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.326.3453.1](#) [25.330.1353.1](#) [25.330.4853.1](#)  
[25.330.5153.1](#) [25.330.5353.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.600.4053.0](#) [25.640.3553.1](#) [SH02-5,08](#)