

Male Headers with Solder and Press-In Pins, MCS-MIDI

Pin Spacing: 2.5 mm

MCS MICRO



- Horizontal or vertical PCB mounting via straight and angled solder pins
- Also available with press-in pins for solder-free connection to the PCB
- 100% protected against mismatching; only mating halves with the same pole number can be connected together
- Coding pins available

Technical data:


Pin Spacing	2.5 mm / 0.098 in.			Press-In Technology 2.5 mm / 0.098 in.		
	IEC/EN 60664-1			IEC/EN 60664-1		
Ratings per						
Overtoltage category	III	III	II	III	III	II
Pollution degree	3	2	2	3	2	2
Rated voltage	80 V	160 V	320 V	80 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV
Nominal current	6 A	6 A	6 A	4 A	4 A	4 A
Approvals per	UL/CSA			UL/CSA		
Use group UL 1059	B	C	D	B	C	D
Rated voltage	150 V	-	-	150 V	-	-
Nominal current UL	4 A	-	-	4 A	-	-
Nominal current CSA	4 A	-	-	4 A	-	-

Solder and press-in pin data:

Solder pin: length/width	4.6 mm / 0.8 x 0.8 mm (straight)
Solder pin: length/width	3.7 mm / 0.8 x 0.8 mm (angled)
Solder pin: drilled hole diameter	1.1 ^{+0.1} mm
Press-in pin: length/width	3.2 mm / 0.6 x 1.2 mm
Press-in pin: drilled hole diameter	1.15 ^{+0.025} mm
Press-in pin: metal-plated hole	1.0 ^{+0.09} / _{-0.08} mm (HAL Sn)
Press-in pin: metal-plated hole	1.0 ^{+0.09} / _{-0.08} mm (Chem. Sn)

Material data:

Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL 94	V0
Lower/Upper limit temperature	-60 °C / +100 °C / Press-in pin: -40 °C / +85 °C
Contact material	Electrolytic copper (E _C) / Copper alloy for press-in technology
Contact plating	tin-plated
MCS connectors are also available upon request with gold-plated or partially gold-plated contact surfaces.	
Depending on the version requested, "item no. suffix . . . /010-000" is added to the "basic item no."	

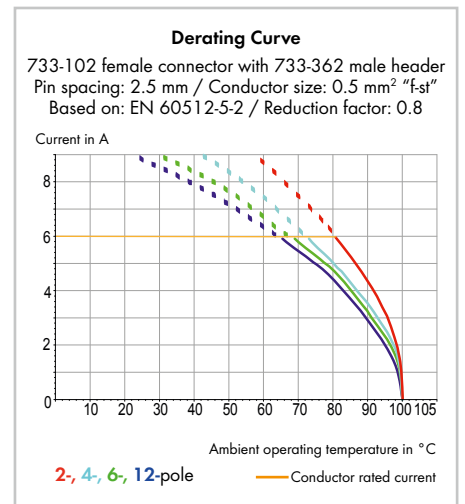

MCS MICRO accessory

Page:

Coding keys	235

The MULTI CONNECTION SYSTEM (MCS) is designed without breaking capacity for compliance with DIN EN 61984. When used as intended, these connectors shall not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wago manufacturer](#):

Other Similar products are found below :

[734-190](#) [750-460](#) [209-574](#) [231-118/026-000](#) [231-620/019-000](#) [250-209](#) [2734-108/037-000](#) [280-438](#) [285-135](#) [231-446/001-000_NR](#) [232-216/026-000](#) [264-726](#) [2010-1207](#) [2001-1207](#) [830-800/000-305](#) [811-421](#) [2006-1661](#) [750-960](#) [750-530](#) [210-197](#) [248-504](#) [731-138/048-000](#) [750-604](#) [773-108](#) [793-5666](#) [811-317](#) [811-411](#) [857-415](#) [255-406](#) [280-675](#) [285-407](#) [0745-0302](#) [2060-473/998-404](#) [830-1000/000-000](#) [2000-5372](#) [769-412](#) [221-525](#) [852-1417](#) [2636-3105/020-000](#) [2009-110](#) [231-332/108-000](#) [281-512/281-501](#) [750-421](#) [750-842](#) [769-615](#) [753-437](#) [2009-145](#) [852-1322](#) [852-1328](#) [852-1605](#)