


4 Male Headers with Solder and Press-In Pins, MCS-MIDI

Pin Spacing: 3.5 mm, 3.81 mm

MCS MINI

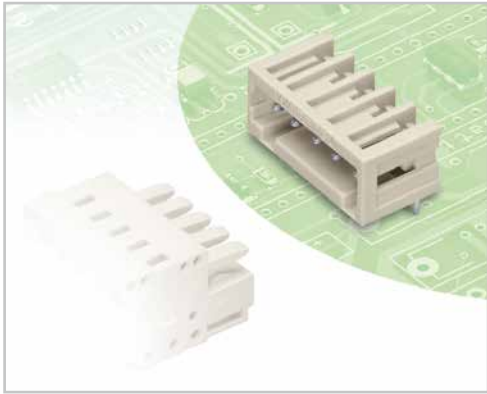

- Male headers may be mounted horizontally or vertically via straight or angled solder pins
- 1 x 1 mm pin cross section (MCS MINI) allows a nominal current of 10 A
- Double-deck male headers save space on the PCB, providing a large number of “wire-to-board” connections
- 100% protected against mismatching
- Coding pins available

Technical data:

Pin Spacing	3.5/3.81 mm 0.138 in.			3.5/3.81 mm 0.138 in.			3.5/3.81 mm 0.138 in.		
	IEC/EN 60664-1			IEC/EN 60664-1			IEC/EN 60664-1		
Ratings per	III	III	II	III	III	II	III	III	II
Overtoltage category	3	2	2	3	2	2	3	2	2
Pollution degree	3	2	2	3	2	2	3	2	2
Rated voltage	160 V	160 V	320 V	160 V	160 V	320 V	160 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV
Nominal current	10 A	10 A	10 A	8 A	8 A	8 A	10 A	10 A	10 A
Approvals per	UL/CSA			UL/CSA			UL/CSA		
Use group UL 1059	B	C	D	B	C	D	B	C	D
Rated voltage	300 V	-	300 V	300 V	-	300 V	300 V	-	300 V
Nominal current UL	10 A	-	10 A	10 A	-	10 A	10 A	-	10 A
Nominal current CSA	10 A	-	10 A	10 A	-	10 A	10 A	-	10 A

Press-in technology:


Double-deck version:

Solder and press-in pin data:

Solder pin: length/width	4.5 mm / 1 x 1 mm (straight)
Solder pin: length/width	3.8 mm / 1 x 1 mm (angled)
Solder pin: length/width	3.6 mm / 1 x 1 mm (double-deck male headers)
Solder pin: drilled hole diameter	1.4 ^{+0.1} mm
Press-in pin: length/width	2.9 mm / 0.6 x 1.2 mm
Press-in pin: drilled hole diameter	1,15 ^{±0.025}
Press-in pin: metal-plated hole	1.0 Ø ^{+0.009} _{-0.008} mm (HAL Sn)
Press-in pin: metal-plated hole	1.0 Ø ^{+0.009} _{-0.008} mm (Chem. Sn)
For other pin lengths, please contact factory.	

Material data:

Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL 94	V0
Lower/Upper limit temperature	-60 °C / +100 °C / Press-in pin: -40 °C / +85 °C
Contact material	Electrolytic copper (E _{cu}) / Copper alloy for press-in technology
Contact plating	tin-plated
MCS connectors are also available upon request with gold-plated or partially gold-plated contact surfaces.	
Depending on the version requested, “item no. suffix ... /010-000” is added to the “basic item no.”	

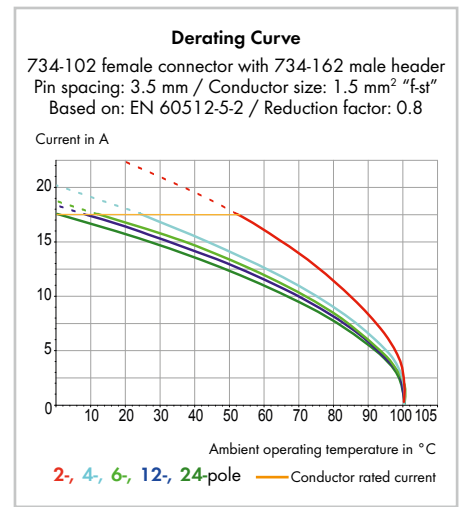

MCS MINI accessory:

Page:

Coding keys	273

The MULTI CONNECTION SYSTEM (MCS) is designed without breaking capacity for compliance with DIN EN 61984. When used as intended, these connectors shall not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Wago](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [5JO-1000CD-SIL](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2-US-AC120](#) [LY2-US-DC24](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#)
[M115C60](#) [M115N010](#) [M115N0150](#) [603-12D](#) [60HE1-5DC](#) [60HE2S-12DC](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#)
[61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#)
[61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)