


4 Male Headers with Solder and Press-In Pins, MCS-MIDI

Pin Spacing: 3.5 mm, 3.81 mm

MCS MINI

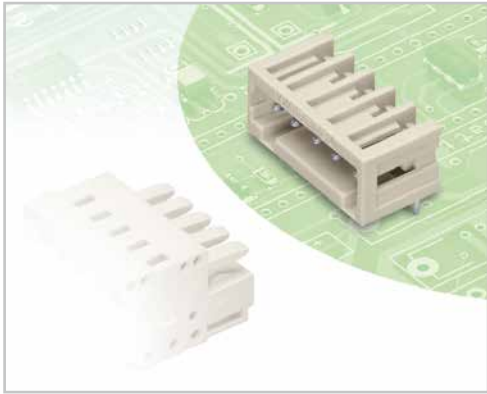

- Male headers may be mounted horizontally or vertically via straight or angled solder pins
- 1 x 1 mm pin cross section (MCS MINI) allows a nominal current of 10 A
- Double-deck male headers save space on the PCB, providing a large number of “wire-to-board” connections
- 100% protected against mismatching
- Coding pins available

Technical data:

Pin Spacing	3.5/3.81 mm 0.138 in.			3.5/3.81 mm 0.138 in.			3.5/3.81 mm 0.138 in.		
	IEC/EN 60664-1			IEC/EN 60664-1			IEC/EN 60664-1		
Ratings per									
Overtoltage category	III	III	II	III	III	II	III	III	II
Pollution degree	3	2	2	3	2	2	3	2	2
Rated voltage	160 V	160 V	320 V	160 V	160 V	320 V	160 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV	2.5 kV
Nominal current	10 A	10 A	10 A	8 A	8 A	8 A	10 A	10 A	10 A
Approvals per	UL/CSA			UL/CSA			UL/CSA		
Use group UL 1059	B	C	D	B	C	D	B	C	D
Rated voltage	300 V	-	300 V	300 V	-	300 V	300 V	-	300 V
Nominal current UL	10 A	-	10 A	10 A	-	10 A	10 A	-	10 A
Nominal current CSA	10 A	-	10 A	10 A	-	10 A	10 A	-	10 A

Press-in technology:


Double-deck version:

Solder and press-in pin data:

Solder pin: length/width	4.5 mm / 1 x 1 mm (straight)
Solder pin: length/width	3.8 mm / 1 x 1 mm (angled)
Solder pin: length/width	3.6 mm / 1 x 1 mm (double-deck male headers)
Solder pin: drilled hole diameter	1.4 ^{+0.1} mm
Press-in pin: length/width	2.9 mm / 0.6 x 1.2 mm
Press-in pin: drilled hole diameter	1,15 ^{±0.025}
Press-in pin: metal-plated hole	1.0 Ø ^{+0.009} _{-0.008} mm (HAL Sn)
Press-in pin: metal-plated hole	1.0 Ø ^{+0.009} _{-0.008} mm (Chem. Sn)
For other pin lengths, please contact factory.	

Material data:

Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL 94	V0
Lower/Upper limit temperature	-60 °C / +100 °C / Press-in pin: -40 °C / +85 °C
Contact material	Electrolytic copper (E _{cu}) / Copper alloy for press-in technology
Contact plating	tin-plated
MCS connectors are also available upon request with gold-plated or partially gold-plated contact surfaces.	
Depending on the version requested, “item no. suffix ... /010-000” is added to the “basic item no.”	

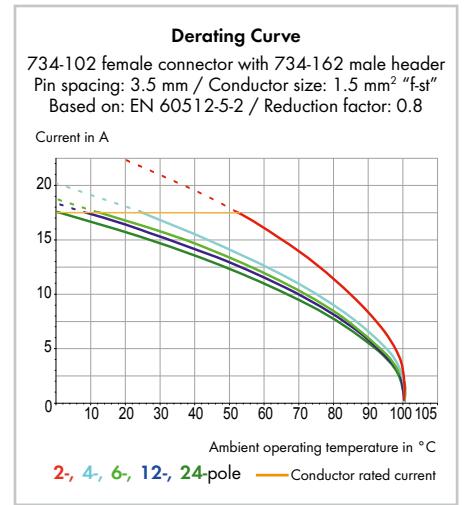

MCS MINI accessory:

Page:

Coding keys	273

The MULTI CONNECTION SYSTEM (MCS) is designed without breaking capacity for compliance with DIN EN 61984. When used as intended, these connectors shall not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wago](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [0050291907](#) [00-9021-0611-00-339](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [M90C108951C](#) [70.362.1628.0](#) [70-](#)
[4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [80.063.4001.1](#)
[800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-001000](#) [803-43-024-10-001000](#)
[803-93-012-10-001000](#)