


4-Channel Analog Input; RTD/TC; Intrinsically Safe

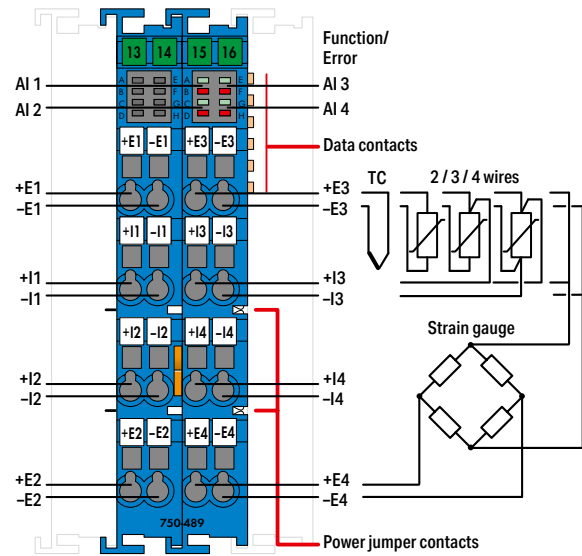

This analog input module directly connects resistance temperature devices (RTD) and thermocouples operating in hazardous environments of Zones 0 and 1. The cold junction compensation of the respective channel is incorporated into the module. The WAGO-I/O-SYSTEM 750 must be installed either in Zone 2 or in a non-hazardous area. The 24 V supply is derived from the module's power jumper contacts. The shield directly connects to the DIN-rail. The parameters are set via the GSD file, e!COCKPIT and WAGO-I/O-CHECK.

Indicators:

- Green LED (availability ON/OFF)
- Red LED (overflow, underflow, measurement range overflow/underflow)

Field and system levels are electrically isolated.



A functional galvanic isolation is provided between the channels.

Note: The analog output module must only be operated via 24 VDC Ex !!

General information (e.g., installation regulations) on explosion protection is available in the WAGO-I/O-SYSTEM 750 manuals!

Description	Item No.	Pack. Unit
4AI RTD/TC Ex i	750-489	1
Accessories	Item No.	Pack. Unit
Mini-WSB Quick Marking System plain	248-501	50

Technical Data	
Number of analog inputs	4
Signal type	Resistance thermometers; Resistors; Potentiometer setting;
	Thermocouples; mV sensors
Sensor connection	RTD/R: 2 wires; 3 wires; 4 wires TC/U: 2 wires
Measurement ranges	RTDs: Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Ni1000-TK5000; Resistors: 250 Ω, 500 Ω, 1 kΩ, 2 kΩ, 4 kΩ, PTC; Potentiometer setting: 0 ... 100 % Thermocouples: Type B (+250 ... +1,820 °C); Type C (0 ... +2,315 °C); Type E (-200 ... +1,000 °C); Type J (-210 ... +1,200 °C); Type K (-200 ... +1,372 °C); Type N (-200 ... +1,300 °C); Type R, S (-50 ... +1,768 °C); Type T (-200 ... +400 °C); mV sensor: ±30 mV; ±60 mV; ±120 mV; ±250 mV; ±500 mV; ±1,000 mV; ±2,000 mV
Resolution in process image	0.1 K of full scale value 0.01 K of full scale value (restricted to -50 °C ... +150 °C)
Data width (internal)	4 x 16-bit data; 4 x 8-bit control/status (optional)
Conversion time	≥10 ms/2 wires (per channel)*; ≥20 ms/3 wires, 4 wires (per channel)*
*for RTD/R; TC/U conversion time depends on module setting	

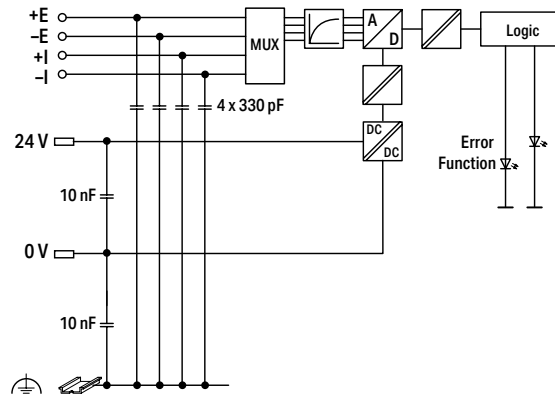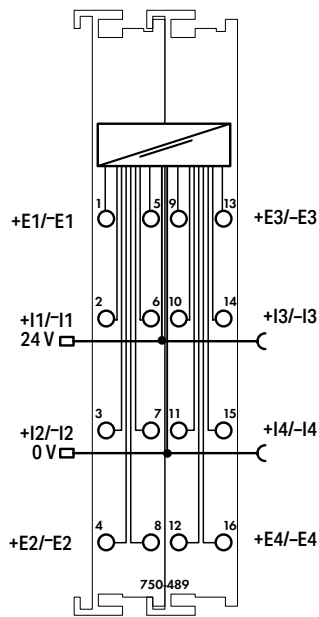

Technical Data

Measurement error typ. (at 25 °C surrounding air temperature)	In delivery state: ±0.2 % of the upper-range value (value achieved during calibration in operating environment 0 ≤ TA ≤ 55 °C); After user calibration: ±0.05 % of the upper-range value (only valid in the thermally stable operating state)
Temperature error (typ.)	±0.001 %/K of the upper-range value
Measured current (typ.)	0.1 mA (RTD)
Cold junction compensation	Integrated
Supply voltage (field)	24 VDC (Ex i power supply: U _o = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Power consumption, field supply	typ. 50 mA (in RTD/TC operation); max. 120 mA (in strain gauge load operation)
Power consumption, system supply (5 V)	typ. 50 mA (in RTD/TC operation); max. 60 mA (in strain gauge load operation)
Power consumption	typ. 1.6 W (in RTD/TC operation); max. 3.2 W (in strain gauge load operation)
Power loss	typ. 1.6 W (in RTD/TC operation); max. 3.2 W (in strain gauge load operation)
Isolation	acc. to EN/IEC 60079-11: 300 VAC system/supply; acc. to EN/UL 61010-2-201: 1200 VDC system/supply/channel
Cable length (shielded)	≤ 200 m
Connection technology	CAGE CLAMP®
Conductor cross-section	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.33 inch
Dimensions W x H x D	24 x 67.8 x 100 mm
Weight	99 g
EMC immunity to interference	Per EN 61000-6-2 (marine applications)
EMC emission of interference	Per EN 61000-6-3 (marine applications)
Configuration options	Sensor types, measurement ranges, filters, resolution, smoothing, diagnostics, etc. can be configured via WAGO-I/O-CHECK, e!COCKPIT or device descriptions (e.g., GSDML)

Explosion protection

Safety-relevant data (circuit)	U _o = 4 V; I _o = 13.46 mA; P _o = 13.46 mW; Linear characteristic curve
Reactances Ex ia IIC	L _o = 0.19 H; C _o = 100 μF
Reactances Ex ia IIB	L _o = 0.78 H; C _o = 1000 μF
Reactance Ex ia IIA	L _o = 1.57 H; C _o = 1000 μF
Reactances Ex ia I	L _o = 2.57 H; C _o = 1000 μF
Reactances	Reactances without accounting for the concurrence of capacitance (C _o) and inductance (L _o); For reactances that take into account the concurrence of C _o and L _o , see manual

Standards and Approvals

Conformity marking	CE
Ex standard	EN IEC 60079-0, -7, -11
Marine applications	DNV GL
☉ E175199 Ordinary Locations	
☉ TÜV 12 ATEX 106032 X	II 3 (1) G Ex ec [ia Ga] IIC T4 Gc II (1) D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I
IEC IECEx TUN 12.0039 X	Ex ec [ia Ga] IIC T4 Gc [Ex ia Da] IIIC [Ex ia Ma] I
☉ UL E198726 Hazardous Locations (Division classified)	Cl I, Div. 2, Group A, B, C, D, T4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Wago](#) manufacturer:

Other Similar products are found below :

[61FGPN8DAC120](#) [CV500SLK21](#) [70177-1011](#) [F03-03 HAS C](#) [F03-31](#) [81550401](#) [FT1A-C12RA-W](#) [H2CAC24A](#) [H2CRSAC110B](#) [R88A-CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [AFP0RT32CT](#) [DRT2ID08C](#) [DTB4896VRE](#) [DTB9696LVE](#) [E53-AZ01](#) [E53E01](#) [E53E8C](#) [E5C4Q40J999FAC120](#) [E5CWLQ1TCAC100240](#) [E5GNQ03PFLKACDC24](#) [B300LKL21](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#) [NT20SST122BV1](#) [NV-CN001](#) [OAS-160-N](#) [C40PEDRA](#) [K31S6](#) [K33-L1B](#) [K3MA-F](#) [100-240VAC](#) [K3TX-AD31A](#) [89750101](#) [L595020](#) [SRM1-C02](#) [SRS2-1](#) [G32X-V2K](#) [26546803](#) [26546805](#) [PWRA440A](#) [CPM1AETL03CH](#) [CV500SLK11](#) [3G2A5BI081](#) [3G2A5IA122](#) [3G2A5LK010E](#) [3G2A5OA223](#) [3G2A5OD211](#) [3G2A5PS223E](#)