

2-Channel Analog Output Module 0/4-20 mA

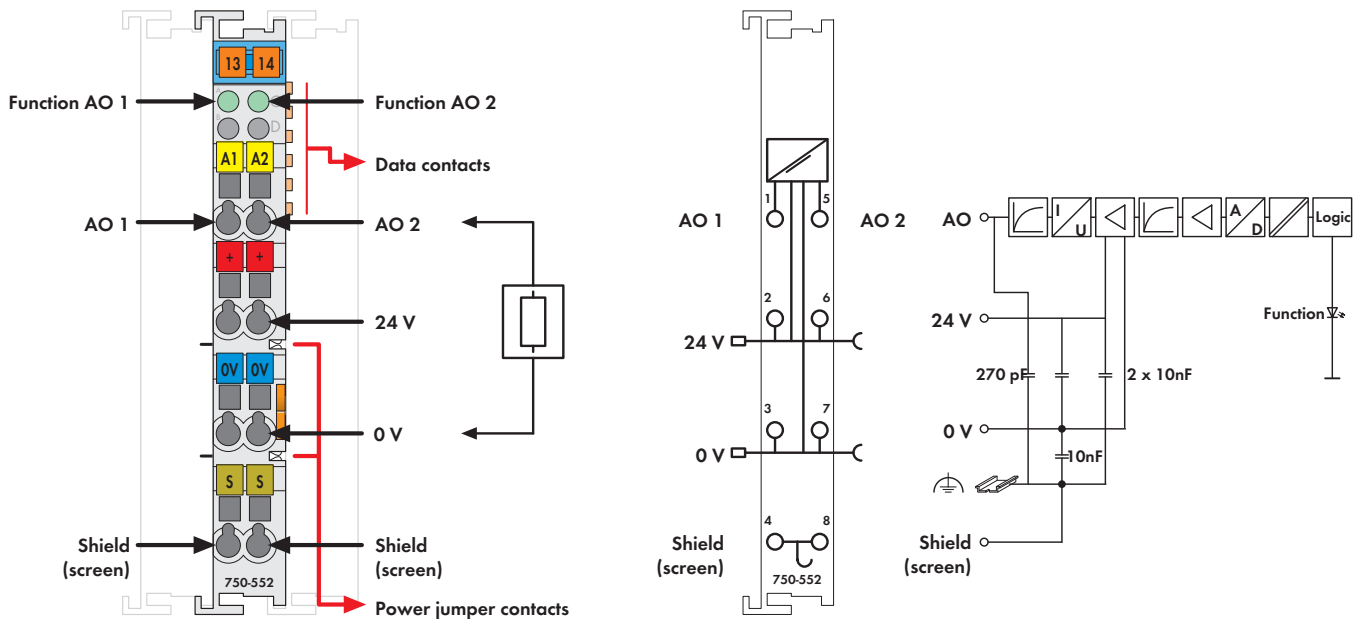


Fig. 750 Series
Delivered without miniature WSB markers

The analog output module creates a standardized signal of 0-20mA or 4-20mA.

The output signal is electrically isolated and will transmit with a 12-bit resolution.

“Current” analog output modules use power derived from the field side (loop powered).

Description	Item No.	Pack. Unit
2AO 0-20mA	750-552	1
2AO 4-20mA	750-554	1
2AO 0-20mA/S5 ¹⁾	750-552/000-200	1
2AO 0-20mA/T	750-552/025-000	1
Extended temperature range: -20 °C ... +60 °C		
2AO 4-20mA/S5 ¹⁾	750-554/000-200	1
2AO 4-20mA/T	750-554/025-000	1
Extended temperature range: -20 °C ... +60 °C		
2AO 0-20mA (without connector)	753-552	1
2AO 4-20mA (without connector)	753-554	1
¹⁾ Data format for S5 control with FB 251		
Accessories	Item No.	Pack. Unit
753 Series Connectors	753-110	25
Coding elements	753-150	100
Miniature WSB Quick marking system		
plain	248-501	5
with marking	see Section 11	
Approvals		
Conformity marking	CE	
Korea Certification		
Marine applications (versions upon request)	ABS, BV, DNV, GL, KR, LR, NKK, PRS, RINA	
UL 508		
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
TÜV 07 ATEX 554086 X	I M2 Ex d I Mb, II 3 G Ex nA IIC T4 Gc, II 3 D Ex tc IIIC T135°C Dc	
IECEx TUN 09.0001 X	Ex d I Mb, Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc	

Technical Data	
No. of outputs	2
Current consumption typ. (internal)	70 mA
Voltage via power jumper contacts	24 V DC (-25 % ... +30 %)
Signal current	0 - 20mA (750-552 / 753-552) 4 - 20mA (750-554 / 753-554)
Load impedance	< 600 Ω
Linearity	± 10 µA
Resolution	12 bits
Conversion time	approx. 2 ms
Measuring error (25 °C)	< ± 0.1 % of the full scale value
Temperature coefficient	< ± 0.01 % /K of the full scale value (750-552 / 753-552) < ± 0.015 % /K of the full scale value (750-554 / 753-554)
Isolation	500 V system/supply
Bit width	2 x 16 bits data 2 x 8 bits control/status (option)
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Strip lengths, 750/753 Series	8 ... 9 mm / 0.33 in 9 ... 10 mm / 0.37 in
Width	12 mm
Weight	51 g
EMC immunity of interference	acc. to EN 61000-6-2, marine applications
EMC emission of interference	acc. to EN 61000-6-4, marine applications

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wago manufacturer](#):

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#) [750-1505](#) [787-732](#)