


PCB Terminal Strips with Push-buttons 2.5 mm²

Pin Spacing: 5 mm, 7.5 mm

804 Series

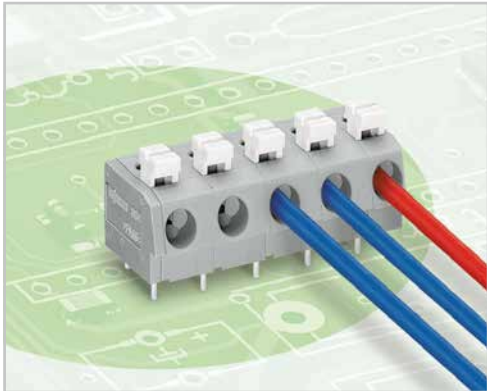

- PCB terminal strips with push-button actuated Push-in CAGE CLAMP®
- Simple, push-in terminations of solid and ferruled conductors
- A large conductor entry accommodates conductors with a cross section up to 12 AWG with an insulation diameter up to 4.2 mm
- PCB terminal strips with spacers to increase pin spacing
- Versions available with custom internal commoning (factory assembly), e.g., commoning ground conductor

Technical data:


Pin Spacing	5 mm 0.197 in.			7.5 mm 0.295 in.		
	IEC/EN 60664-1			IEC/EN 60664-1		
Ratings per						
Overtoltage category	III	III	II	III	III	II
Pollution degree	3	2	2	3	2	2
Rated voltage	250 V	320 V	630 V	320 V	320 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV	4 kV	4 kV	4 kV
Nominal current	24 A	24 A	24 A	24 A	24 A	24 A
Approvals per	UL/CSA			UL/CSA		
Use group UL1059	B	C	D	B	C	D
Rated voltage	300 V	-	300 V	300 V	-	300 V
Nominal current UL	10 A	-	10 A	10 A	-	10 A
Nominal current CSA	10 A	-	10 A	10 A	-	10 A

Conductor and solder pin data:

Connection technology	Push-in CAGE CLAMP®
Conductor size: solid	0.25 ... 2.5 mm ²
Conductor size: fine-stranded	0.25 ... 2.5 mm ²
Conductor size: fine-stranded	0.25 ... 1.5 mm ² (with insulated ferrule)
Conductor size: fine-stranded	0.25 ... 2.5 mm ² (with uninsulated ferrule)
AWG	20 ... 12
Strip length	10 ... 11 mm / 0.39 ... 0.43 in.
Conductor entry angle	0° to PCB
Solder pin: length/width	3.6 mm / 0.8 x 0.6 mm
Solder pin: drilled hole diameter	1.1 ^{+0.1} mm

Material data:

Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability rating per UL 94	V0
Lower/Upper limit temperature	-60 °C / +105 °C
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	tin-plated

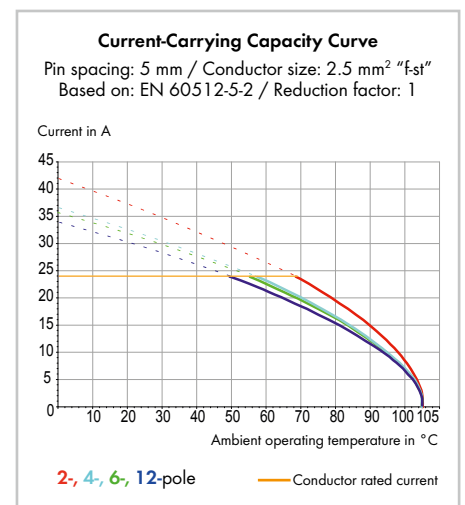

804 Series accessories:

Page:

Marking accessories	570
Operating tools	556
Test plug	568

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wago manufacturer:](#)

Other Similar products are found below :

[734-190](#) [750-460](#) [209-574](#) [231-118/026-000](#) [231-620/019-000](#) [250-209](#) [2734-108/037-000](#) [280-438](#) [285-135](#) [231-446/001-000_NR](#) [232-216/026-000](#) [264-726](#) [2010-1207](#) [2001-1207](#) [830-800/000-305](#) [811-421](#) [2006-1661](#) [750-960](#) [750-530](#) [210-197](#) [248-504](#) [731-138/048-000](#) [750-604](#) [773-108](#) [793-5666](#) [811-317](#) [811-411](#) [857-415](#) [255-406](#) [280-675](#) [285-407](#) [0745-0302](#) [2060-473/998-404](#) [830-1000/000-000](#) [2000-5372](#) [769-412](#) [221-525](#) [852-1417](#) [2636-3105/020-000](#) [2009-110](#) [231-332/108-000](#) [281-512/281-501](#) [750-421](#) [750-842](#) [769-615](#) [753-437](#)
[2009-145](#) [852-1322](#) [852-1328](#) [852-1605](#)