


Fuse Terminal Blocks for Class CC and 10 x 38 mm (1 3/32" x 1 1/2") Fuses 811 Series

2.5 - 16 mm ² 1000 VDC, 32 A	AWG 16 - 6 1000 VDC, 30 A [Ⓢ]	2.5 - 16 mm ² 690 VAC, 32 A 1000 VDC, 32 A	AWG 16 - 6 600 VAC, 30 A [Ⓢ] 750 VAC, 30 A [Ⓢ] 1000 VDC, 30 A [Ⓢ]	2.5 - 16 mm ² -	AWG 16 - 6 600 V, 30 A [Ⓢ] 600 V, 30 A [Ⓢ]
Terminal block width 17.5 mm / 0.689 in 12 - 13 mm / 0.49 in		Terminal block width 17.5 mm / 0.689 in 12 - 13 mm / 0.49 in		Terminal block width 17.5 mm / 0.689 in 12 - 13 mm / 0.49 in	



Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
Fuse terminal block for cylindrical fuses 10 x 38 mm; 1 3/32" x 1 1/2", for photovoltaic applications, light gray, without blown fuse indication, suitable for DIN 35 rail acc. to EN 60715		Fuse terminal block for 10 x 38 mm; 1 3/32" x 1 1/2", light gray, without blown fuse indication, suitable for DIN 35 rail acc. to EN 60715		Fuse terminal block for class CC fuses, light gray, without blown fuse indication, suitable for DIN 35 rail acc. to EN 60715	
○ 1-pole 811-316	12	○ 1-pole 811-310	12	○ 1-pole 811-410	12
		○ 2-pole 811-320	6	○ 2-pole 811-420	6
		○ 3-pole 811-330	4	○ 3-pole 811-430	4
Fuse terminal block for cylindrical fuses 10 x 38 mm; 1 3/32" x 1 1/2", for photovoltaic applications, light gray, with blown fuse indication, 230 - 1000 VDC, suitable for DIN 35 rail acc. to EN 60715		Fuse terminal block for 10 x 38 mm; 1 3/32" x 1 1/2", light gray, with blown fuse indication, 90 - 600 VAC, 115 - 600 VDC, suitable for DIN 35 rail acc. to EN 60715		Fuse terminal block for class CC fuses, light gray, with blown fuse indication, 90 - 600 VAC, 115 - 600 VDC, suitable for DIN 35 rail acc. to EN 60715	
○ 1-pole 811-317	12	○ 1-pole 811-311	12	○ 1-pole 811-411	12
		○ 2-pole 811-321	6	○ 2-pole 811-421	6
		○ 3-pole 811-331	4	○ 3-pole 811-431	4
		Fuse terminal block for 10 x 38 mm; 1 3/32" x 1 1/2", light gray, with blown fuse indication, 24 VDC, suitable for DIN 35 rail acc. to EN 60715		Fuse terminal block for class CC fuses, light gray, with blown fuse indication, 24 VDC, suitable for DIN 35 rail acc. to EN 60715	
		○ 1-pole 811-314	12	○ 1-pole 811-414	12
Cylindrical fuses are not offered by WAGO. Temperature scale handling from -35 °C to +85 °C. Nominal voltage and current are given by the LED or fuse.		Cylindrical fuses are not offered by WAGO. Temperature scale handling from -35 °C to +85 °C. Nominal voltage and current are given by the LED or fuse.		Cylindrical fuses are not offered by WAGO. Temperature scale handling from -35 °C to +85 °C. Nominal voltage and current are given by the LED or fuse.	

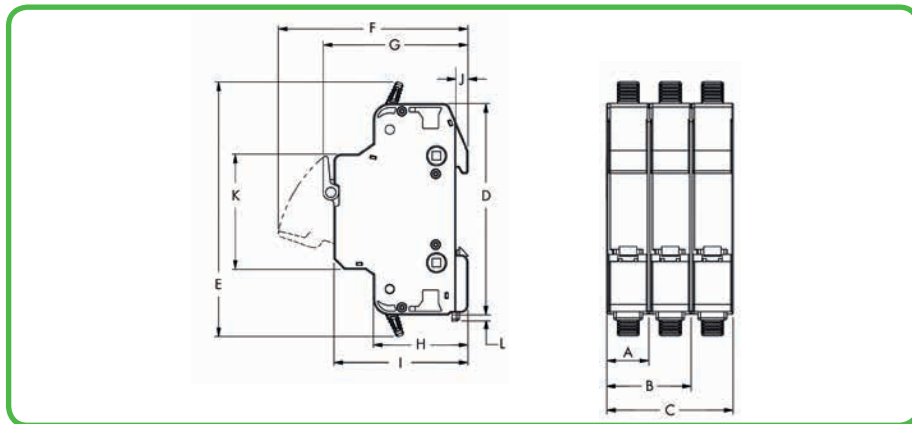

Dimension	mm (in.)
A	17.3 (0.68)
B	34.6 (1.36)
C	51.9 (2.04)
D	87 (3.43)
E	104.9 (4.13)
F	78.3 (3.08)
G	59.7 (2.35)
H	39 (1.54)
I	55.2 (2.17)
J	5 (0.2)
K	47.4 (1.87)
L	2.5 (0.1)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wago manufacturer](#):

Other Similar products are found below :

[734-190](#) [750-460](#) [209-574](#) [231-118/026-000](#) [231-620/019-000](#) [250-209](#) [2734-108/037-000](#) [280-438](#) [285-135](#) [231-446/001-000_NR](#) [232-216/026-000](#) [264-726](#) [2010-1207](#) [2001-1207](#) [830-800/000-305](#) [811-421](#) [2006-1661](#) [750-960](#) [750-530](#) [210-197](#) [248-504](#) [731-138/048-000](#) [750-604](#) [773-108](#) [793-5666](#) [811-317](#) [811-411](#) [857-415](#) [255-406](#) [280-675](#) [285-407](#) [0745-0302](#) [2060-473/998-404](#) [830-1000/000-000](#) [2000-5372](#) [769-412](#) [221-525](#) [852-1417](#) [2636-3105/020-000](#) [2009-110](#) [231-332/108-000](#) [281-512/281-501](#) [750-421](#) [750-842](#) [769-615](#) [753-437](#) [2009-145](#) [852-1322](#) [852-1328](#) [852-1605](#)