

面板安装开孔图  
Panel cut out

技术参数:


插芯:

- 插针数: 16+PE
  - 额定电流: 16A
  - 额定电压: 250V
  - 额定脉冲电压: 4kV
  - 污染等级: 3
  - 依据UL/CSA的额定电压: 600V
  - 绝缘阻抗:  $\geq 10^{10}\Omega$
  - 材料: 聚碳酸酯
  - 颜色: RAL 7032 (浅灰色)
  - 温度范围:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
  - 依据UL 94的阻燃等级: V0
  - 可插拔次数:  $\geq 500$
- 插针:
- 接线方式: 冷压连接
  - 材料: 铜合金
  - 表面处理:
    - 镀银
    - 镀金
  - 接触电阻:  $< 1\text{m}\Omega$
  - 线径范围:  $0.14-4.0\text{mm}^2(26-12\text{ AWG})$
  - 工具:
    - 冷压钳: TL02G
    - 退针器: TL01

Technical specification:

Insters:

- No. of contact: 16+PE
  - Rated current: 16A
  - Rated voltage: 250V
  - Rated impulse voltage: 4kV
  - Pollution degree: 3
  - Rated voltage acc.to UL/CSA: 600V
  - Insulation resistance:  $\geq 10^{10}\Omega$
  - Material: polycarbonate
  - Colour: RAL 7032(light grey)
  - Temperature range:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
  - Flammability acc.to UL 94: V0
  - Mating cycles:  $\geq 500$
- Contacts:
- Terminal: crimp terminal
  - Material: copper alloy
  - Surface:
    - hard-silver plated
    - hard-gold plated
  - Contact resistance:  $\leq 1\text{m}\Omega$
  - Wire gauge:  $0.14-4.0\text{mm}^2(26-12\text{ AWG})$
  - Tools:
    - Crimp contact tool: TL02G
    - Contact removal tool: TL01

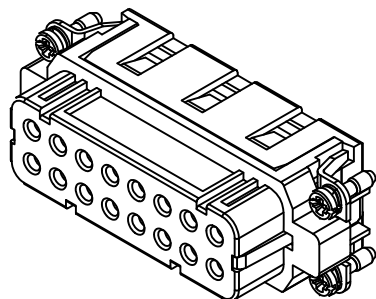

|               |              |                  |                |             |                 |   |            |                   |   |                   |                 |
|---------------|--------------|------------------|----------------|-------------|-----------------|---|------------|-------------------|---|-------------------|-----------------|
|               |              |                  |                |             |                 | 表面处理<br>Finish                                | -          |                   |   | 图号<br>Drawing No. | -               |
|               |              |                  |                |             |                 | 材料<br>Material                                | -          |                   |   | 产品代号<br>Part Code | HA-016-FC 17-32 |
| 标记<br>Mark    | 处数<br>Number | 变更描述/Description |                |             | 签名<br>Signature | 日期<br>Date                                    |            |                   |   | 产品料号<br>Part No.  | 1210160200002   |
| 姓名/Name       | 日期/Date      | 姓名/Name          | 日期/Date        | 比例<br>Scale | 版本<br>REV.      | 重量<br>Weight                                  | 数量<br>Qty. | 产品名称<br>Part Name |   |                   | -               |
| 绘图<br>Drawn   | BQ LUO       | 18.10.2010       | 标准化<br>Stand.  | -           | -               | 1:1   | V1.0       | 37.2g             | -   |                   |                 |
| 审核<br>Checked | P RAO        | 18.10.2010       |                |             |                 |   |            |                   |   |                   |                 |
| 工艺<br>Process | -            | -                | 批准<br>Approved | YY LIN      | 18.10.2010      | All Dimensions in mm<br>Original Size DIN A 4 |            |                   | 厦门唯恩电气有限公司<br>XIAMEN WAIN ELECTRICAL CO.LTD |                   |                 |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DC Power Connectors](#) category:*

*Click to view products by [WAIN](#) manufacturer:*

Other Similar products are found below :

[KLDX-SMT-0202-BPTR](#) [171-0722-E](#) [K596](#) [KLD-0201-BC](#) [4C6831AX](#) [10073976-112LF](#) [LCB60PW-M](#) [LCB30PW-M](#) [LCB60PB-M](#)  
[LCC30PB-M](#) [LCB50PW-M](#) [LCB50-M](#) [LCB60-F](#) [LCC30-M](#) [LCB40PW-M](#) [LCC30PW-M](#) [LCB50-F](#) [LCB40-F](#) [LCB30-F](#) [LCC40-M](#)  
[LCC40PB-M](#) [LCB40PB-M](#) [LCC40-F](#) [LCB60-M](#) [LCC40PW-M](#) [LCB50PB-M](#) [DC-002-100](#) [DC-031A-130](#) [DC-031A-100](#) [DC-003A-130](#)  
[DC-045-130](#) [DC-192-130](#) [DC-033-130](#) [DC-011-100](#) [DC-002F-130](#) [DC-002-130](#) [DB-14-2F](#) [DC-183B](#) [DC-060-04A](#) [DC-099-200](#) [DC-015-](#)  
[250-A](#) [DC-016-200-A](#) [DC-005A-200](#) [DC-044A-200](#) [DC-088-200](#) [DC-022A-200](#) [DC-038-150](#) [DC-012A-250](#) [DC-005C-130](#) [DC-012A-200](#)