# omniKlip™




## TO-Device Heat Sink with Universal Clipping Method



Contact: Wakefield-Vette 33 Bridge St. Pelham, NH 03076 603-635-2800

www.wakefield -vette.com

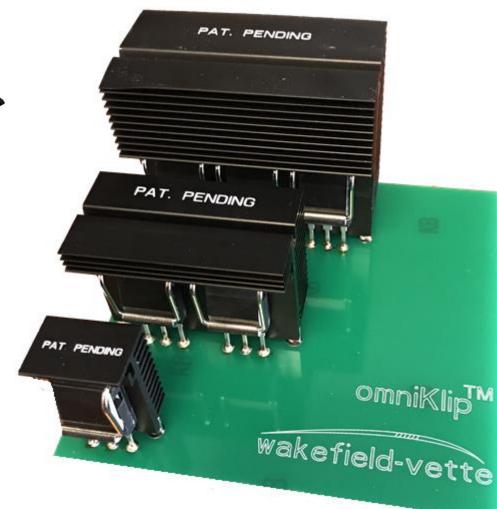



#### omniKlip Series Heat Sink w/ Clip (s) for TO-Devices

The Wakefield- Vette omniKlip heat sink series are a configurable and patented (Pat. Pending) high performance, low cost and compact solutions for TO-220, TO-247 and TO-264, or similar packages. This powerful heat sink provides tool and fixture free assembly operation, largest surface areas and smallest space occupation. It is the ideal type of heat sink for high power density and small size (1U or 2U) electronic packaging with forced convention cooling.

#### **Features & Benefits**

Minimum assembly cost and labor

Spring Clips make the mounting holes, fasteners, tools and fixtures obsolete in assembly operations & reduce costs.

**Maximum Repeatability** 

Constant spring force over repeated assembly/disassembly

**Maximum Reliability** 

Resilient spring action locks electronic component in place. Fewer parts in assembly and no fasteners and washers required. Prevent short circuit by eliminating metal particles generated from hardware or thread tapping

**Design Flexibility** 


Maximum flexibility for dynamic device locations and power up grading. "Configure-to-Fit" gives designers total freedom to configure heat sink needed to fit their dynamic design environments.

#### **Specifications**

- **Heat Sink**: Aluminum Alloy 6063-T5 or Equivalent with black anodized finish.
- Spring Clip: Music Wire, Per ASTM A228 with bright nickel plating
- **Solder Foot**: Cold-rolled Steel, Per ASTM A-366 with pure tin over copper strike. RoHS compliant.




#### **OMNI-CLIP-18-L Series Heat Sink**

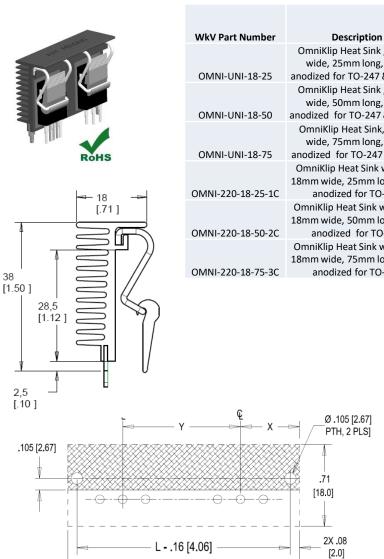

#### **Height Off** Related Base (Height Clip **Package Cooled** Length Width of Fin) OmniKlip Heat Sink, 18mm wide, 25mm long, black 0.984" 1.500" 0.710" anodized for TO-247 & TO-264 OMNI-UC TO-247, TO-264 (25.00mm) (38.10mm) (18.03mm) OmniKlip Heat Sink, 18mm wide, 50mm long, black 1.969" 1.500" 0.710" anodized for TO-247 & TO-264 OMNI-UC TO-247, TO-264 (50.00mm) (38.10mm) (18.03mm) OmniKlip Heat Sink, 18mm wide, 75mm long, black 2 95" 1.500" 0.710" anodized for TO-247 &TO 264 OMNI-UC TO-247, TO-264 (75.00mm) (38.10mm) (18.03mm) OmniKlip Heat Sink w/1 clip, 18mm wide, 25mm long, black 0.984" 1.500" 0.710" TO-220 (18.03mm) anodized for TO-220 (25.00mm) (38.10mm) OmniKlip Heat Sink w/2 clips, 18mm wide, 50mm long, black 1.969" 1.500" 0.710" anodized for TO-220 TO-220 (50.00mm) (38.10mm)(18.03mm)OmniKlip Heat Sink w/3 clips, 18mm wide, 75mm long, black 2.95" 1.500" 0.710" anodized for TO-220 TO-220 (75.00mm) (38.10mm) (18.03mm)

### THERMAL PERFORMANCE (OMNI-UNI-18)

Two TO-247 devices with Sil-pad 900s, L = 50 mm [2.0]









## **OMNI-UNI-27-L Series Heat Sink**




WkV Part				Length	Width	Height
Number	Description	Related Cross Sell Part	Package Cooled	(mm)	(mm)	(mm)
	omniKlip-Heatsink for TOs, 27mm wide,		TO-247, TO-264,TO-			
OMNI-UNI-27-25	25mm long, single sided, black anodized	OMNI-UC, OMNI-220C	220	25	27	50
	omniKlip-Heatsink for TOs, 27mm wide,		TO-247, TO-264,TO-			
OMNI-UNI-27-50	50mm long, single sided, black anodized	OMNI-UC, OMNI-220C	220	50	27	50
	omniKlip-Heatsink for TOs, 27mm wide,		TO-247, TO-264,TO-			
OMNI-UNI-27-75	75mm long, single sided, black anodized	OMNI-UC, OMNI-220C	220	75	27	50

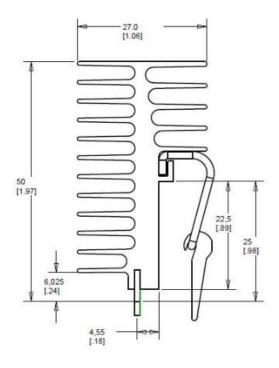

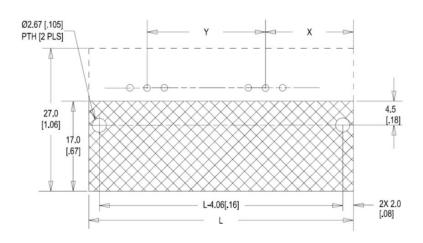

#### **THERMAL PERFORMANCE** (OMNI-UNI-27-50)

Two TO-247 heat sources uniformly spaced on the heat Sink, L= 1.97" [50mm] and total of 10W Power Dissipation




NOTE: Natural Convection Thermal resistance 3.94 °C/W based on 70 °C Temp rise about ambient.







## **OMNI-UNI-32-L Series Heat Sink**

			Package				<b>Height Off Base</b>
WkV Part Number	Description	Related Cross Sell Part	Cooled	Shape	Length	Width	(Height of Fin)
	OmniKlip Heat Sink for 2 universal 2						
	clips, 32mm wide, 58mm long, black		TO-247, TO-	Rectangular,			
OMNI-UNI-32-58	anodized for any TO except TO220	OMNI-UC, OMNI-220C	264	Fins	2.28" (58mm)	1.25" (32mm)	1.62 (46.3mm)



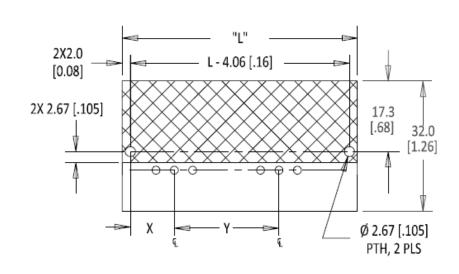

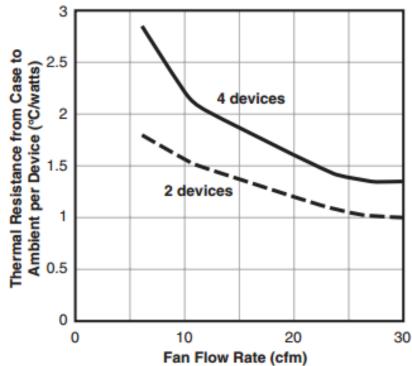







## **OMNI-UNI-30-L Double Sided Series Heat Sink**




WkV Part					
Number	Description	Package Cooled	Length (mm)	Width (mm)	Height (mm)
OMNI-UNI-30-	omniKlip-Heatsink for TOs, 30mm wide,	TO-247, TO-			
25-D	25mm long, double sided, black anodized	264,TO-220	25	30	60
OMNI-UNI-30-	omniKlip-Heatsink for TOs, 30mm wide,	TO-247, TO-			
50-D	50mm long, double sided, black anodized	264,TO-220	50	30	60
OMNI-UNI-30-	omniKlip-Heatsink for TOs, 30mm wide,	TO-247, TO-			
75-D	75mm long, double sided, black anodized	264,TO-220	75	30	60

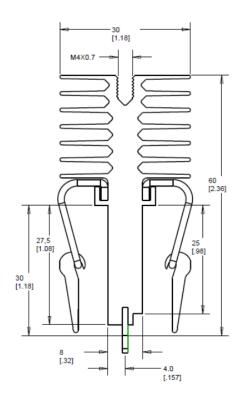

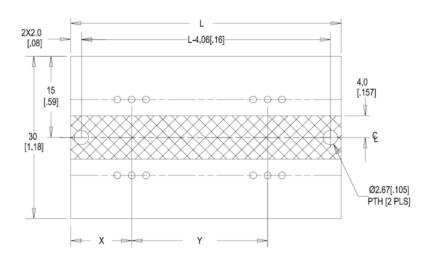

#### THERMAL PERFORMANCE(OMNI-UNI-30-50)

Two TO-247 heat sources uniformly spaced on the heat Sink, L=1.97" [50mm] & total of 10W Power Dissipation



NOTE: Natural Convection Thermal resistance 4.06 °C/W based on 70 °C Temp rise about ambient.







## **OMNI-UNI-34-L Series Heat Sink**




WkV Part				Length	Width	Height
Number	Description	Related Cross Sell Part	Package Cooled	(mm)	(mm)	(mm)
	omniKlip-Heatsink for TOs, 34mm wide,		TO-247, TO-264, TO-			
OMNI-UNI-34-25	25mm long, single sided, black anodized	OMNI-UC, OMNI-220C	220	25	34	75
	omniKlip-Heatsink for TOs, 34mm wide,		TO-247, TO-264, TO-			
OMNI-UNI-34-50	50mm long, single sided, black anodized	OMNI-UC, OMNI-220C	220	50	34	75
	omniKlip-Heatsink for TOs, 34mm wide,		TO-247, TO-264, TO-			
OMNI-UNI-34-75	75mm long, single sided, black anodized	OMNI-UC, OMNI-220C	220	75	34	75

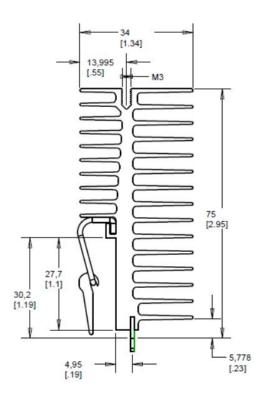

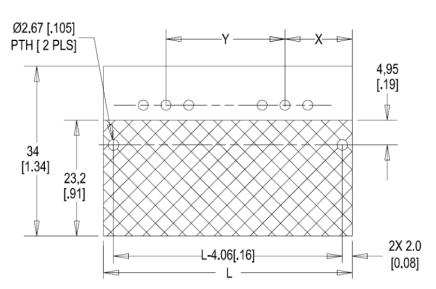

#### THERMAL PERFORMANCE (OMNI-UNI-34-50)

Two TO-247 heat sources uniformly spaced on the heat Sink,



NOTE: Natural Convection Thermal resistance 2.10 °C/W based on 70 °C Temp rise about ambient.







## **OMNI-UNI-40-L Double Sided Series Heat Sink**




WkV Part Number	Description	Package Cooled	Length (mm)	Width (mm)	Height (mm)
	omniKlip-Heatsink for TOs, 40mm wide,	TO-247, TO-			
OMNI-UNI-40-25-D	25mm long, double sided, black anodized	264,TO-220	25	40	75
	omniKlip-Heatsink for TOs, 40mm wide,	TO-247, TO-			
OMNI-UNI-40-50-D	50mm long, double sided, black anodized	264,TO-220	50	40	75
	omniKlip-Heatsink for TOs, 40mm wide,	TO-247, TO-			
OMNI-UNI-40-75-D	75mm long, double sided, black anodized	264,TO-220	75	40	75

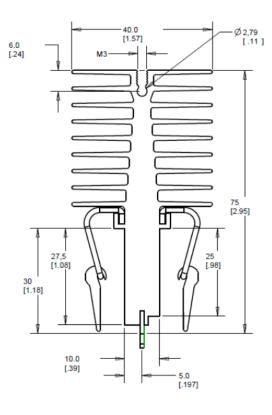

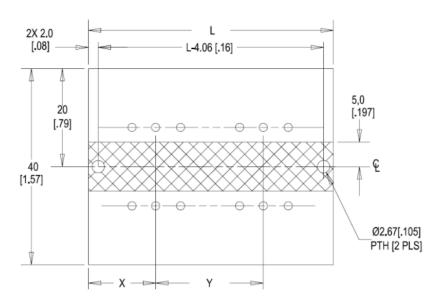

#### THERMAL PERFORMANCE (OMNI-UNI-40-50)

Two TO-247 heat sources uniformly spaced on the heat Sink, L=1.97" [50mm] & total of 10W Power Dissipation




NOTE: Natural Convection Thermal resistance 2.50 °C/W based on 70 °C Temp rise about ambient.






## **OMNI-UNI-41-L Series Heat Sink**

WkV Part							<b>Height Off Base</b>
Number	Description	<b>Related Cross Sell Part</b>	<b>Package Cooled</b>	Shape	Length	Width	(Height of Fin)
	OmniKlip Heat Sinkk for 2 universal clips,						
	41mm wide, 75mm long, black anodized			Rectangular,			
<b>OMNI-UNI-41-75</b>	for any TO except TO220	OMNI-UC, OMNI-220C	TO-247, TO-264	Fins	2.95" (75mm)	1.61" (41mm)	1.62 (46.3mm)

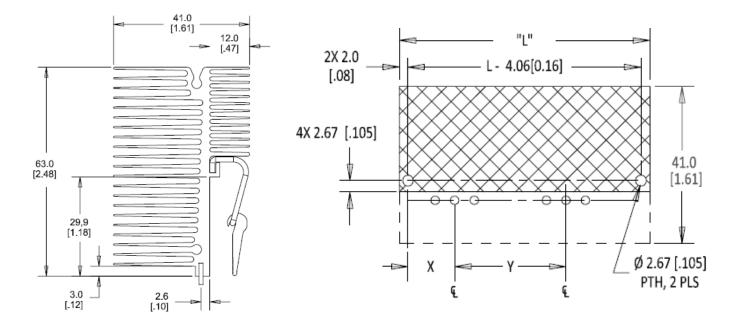









## **Clips**


Part Number	Description
OMNI-UC	Universal Clip for OmniKlip Heat Sink for any TO except T0220
OMNI-220C	Clip for OmniKlip Heat Sink for TO 220

Universal Clip mechanism is rotating the bar by  $180^{\circ}$  The eccentric circle will raise 0.09''. This deformation will exert the force on the components.











omniKlip assembly model in ANSYS, with 18 lbf load applied to the clip



Under the 18 lbf, the clip deformed 0.09" from its original position to the final



Directional deformation plot as shown

With the FEA analysis and simulation, the force applied to the TO-series components will be at least 18 lbs.



## <u>Additional Configurations</u> <u>Contact Wakefield-Vette for more information or visit www.wakefield-vette.com</u>



Back to Back Mounting with 60mm Fan (OMNI-UNI-41-L Series Heat Sink)



Back to Back Mounting with 40mm Fan (OMNI-UNI-32-L Series Heat Sink)



Face to Face Mounting (Space Savor) (OMNI-UNI-41-L Series Heat Sink



Face to Face Mounting (Space Saver) (OMNI-UNI-32-L Series Heat Sink)

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Sinks category:

Click to view products by Wakefield manufacturer:

Other Similar products are found below:

581102B00000G 656-15ABPE 657-20ABPNE 7020B-TC12-MTG 73452PPBA 7G0011A PF720G A22-4026 120-1873-007 HAH10L HAH15L 1542616-1 HS-2506-F1 HS-87M0-F2 218-40CTE3 231-69PAB-15V 25-7520 SW50-4G 231-75PAB-13V 231-75PAB-15V 253-122ABE-22 PSC22CB HAF10L HAQ10T D10100-28 BDN183CBA01 3-21053-4 32438 TX0506-1B TX1806B LAE66A3CB WA-DT2-101E 511-3U 73381PPBA 73403PPBA 7G0047C COMX-440-HSP 510-12M D10650-40T5 V8511 Y APF40-40-13CB/A01 780653U04500G ATS-54310K-C2-R0 FK 216 CB SA FK 231 SA 220 648-51AB 657-20ABPESC 2341BG 679-25AG FK 212 CB SA