

APPROVAL SHEET

RF Switch Series

SP4T GPIO Diversity Switch

Any 2G/3G/4G Antenna Diversity For Receive System

P/N: RFASWKH4414ATF09

*Contents in this sheet are subject to change without prior notice.

Approval Sheet

FEATURES

- Low Insertion Loss : 0.55dB typ. @ 2.7GHz
- High Isolation : 28dB typ. @ 2.7GHz
- P_{1dB} compression point : 28dBm typ. @ 2.7GHz
- Low control voltage : 1.35 to 2.7 V
- Miniature footprint : 2.0 x 2.0 x 0.55 mm³


Description

- The RFASWKH4414ATF09 is a SOI (Silicon On Insulator) Single Pole, Four Throw (SP4T) switch that operating at 0.1-2.7 GHz. The RFASWKH4414ATF09 is manufactured in a QFN-14 (2.0x2.0x0.55mm³) package.
- The RFASWKH4414ATF09 features very high isolation with very low DC power consumption.
- The RFASWKH4414ATF09 has ESD protection devices to achieve excellent ESD performances. No DC Blocking capacitors are required for all RF ports unless DC is biased externally.

Application

- Multi-mode 2G/3G, LTE application receive system.

Block Diagram and Pin Out (Top View)

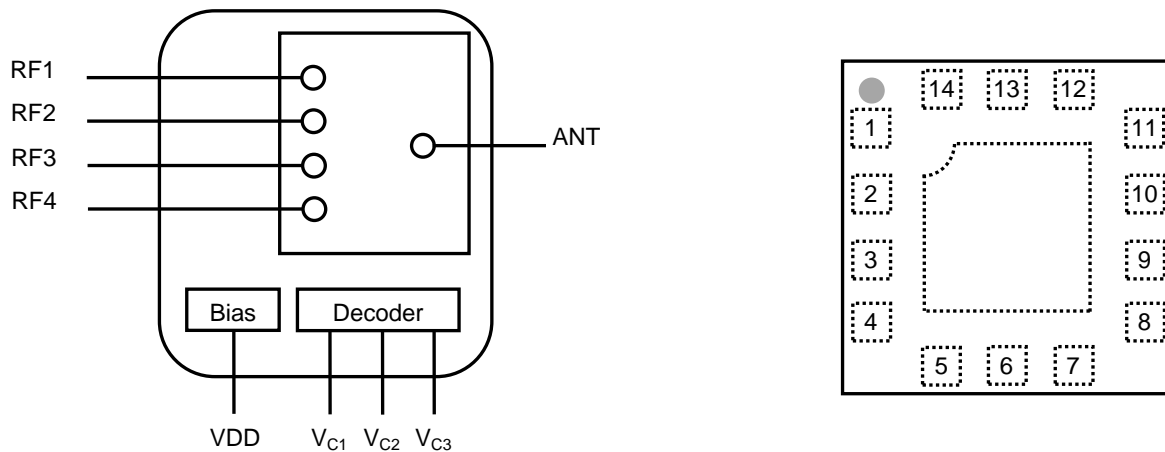


Pin Names and Descriptions

Pin	Name	Description	Pin	Name	Description
1	RF5	RF path 5	8	NC	Not connected
2	RF3	RF path 3	9	RF2	RF path 2
3	RF1	RF path 1	10	RF4	RF path 4
4	VDD	DC power supply	11	RF6	RF path 6
5	V _{C3}	DC control voltage 3	12	NC	Not connected
6	V _{C2}	DC control voltage 2	13	ANT	Antenna port
7	V _{C1}	DC control voltage 1	14	NC	Not connected

Note: Bottom ground paddles must be connected to ground.

Approval Sheet

Application Circuit

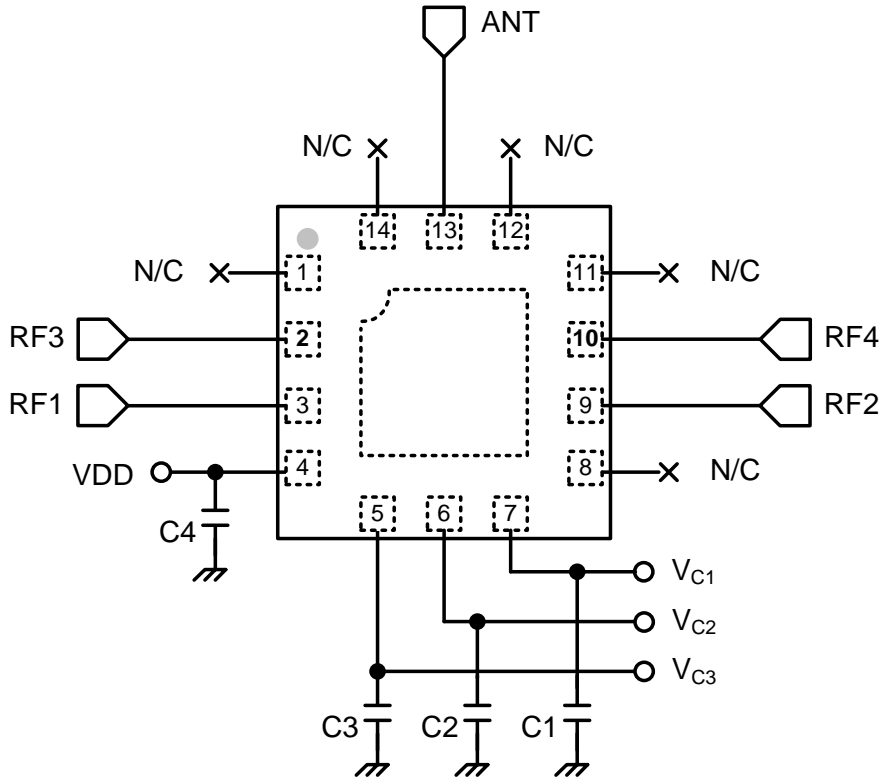

Note: No DC Blocking capacitors are required for all RF ports unless DC is biased externally.

Parts List

Parts No.	Value
C1-C4	1000 pF

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
RFx Input Power	Pin		+28	dBm
DC Supply Voltage	VDD	+2.5	+4.8	V
DC Control Voltage	V _{CTL}	-0.5	+3.0	V
Storage temperature	T _{STG}	-55	+150	°C
Operating temperature	T _{OP}	-40	+85	°C
HBM ESD Voltage, All Pins	V _{ESD} ¹	-	+1000	V

Note 1 : Human Body Model ESD Voltage, Class 1C

Exceeding absolute maximum ratings may cause permanent damage. Operation between operating range maximum and absolute maximum for extended periods may reduce reliability.

Approval Sheet

Electrical Specifications

(Top= 25°C, VDD=2.8V, V_{CTL}=0/1.8V, Characteristic Impedance Z_O= 50 Ω, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
RF Specifications						
Operating Frequency	f		0.1		2.7	GHz
Insertion Loss (ANT port to RFx port)	IL	0.1 ~ 1.0GHz 1.0 ~ 2.0GHz 2.0 ~ 2.7GHz		0.40 0.50 0.55	0.50 0.60 0.65	dB dB
Isolation (ANT port to RFx port)	Iso	0.1 ~ 1.0GHz 1.0 ~ 2.0GHz 2.0 ~ 2.7GHz	35 28 26	38 30 28		dB dB
On State Match	VSWR	0.1 ~ 2.7GHz		1.29	1.43	-
Input Power 1dB Compression Point	P _{1dB}	0.1 ~ 2.7GHz		+28		dBm
RFx Harmonics	2fo, 3fo	PIN = +26 dBm, CW f = 0.1 to 2.7 GHz		+94		dBc
3 rd Order Input Intercept Point	IIP3	PIN = +26 dBm, f = 2.0 GHz Δf = 1 MHz		+69		dBm
DC Specification (Decoder)						
Supply Voltage	VDD		2.5	2.8	4.8	V
Supply Current	I _{DD}	VDD=2.8V		76	85	μA
Control Voltage(High)	V _{CTL(H)}		1.35	1.8	2.7	V
Control Voltage(Low)	V _{CTL(L)}		0		0.4	V
Control Current	I _{CTL}	V _{CTL} =1.8V		0.5	1.0	μA
Switching Specification						
Switching speed	T _{SW}	50% V _{CTL} to 90/10% RF		1.75	2.20	μs


Note : All measurements made in a 50Ω system with 0/+1.8V control voltages, unless otherwise specified.

Logic Table for Switch On-Path (High=1.8V ,Low= 0V)


V _{C1}	V _{C2}	V _{C3}	RF1	RF2	RF3	RF4
0	0	0	On	Off	Off	Off
0	0	1	Off	On	Off	Off
0	1	0	Off	Off	On	Off
0	1	1	Off	Off	Off	On
1	x	x	Off	Off	Off	Off

Approval Sheet


Package Dimensions

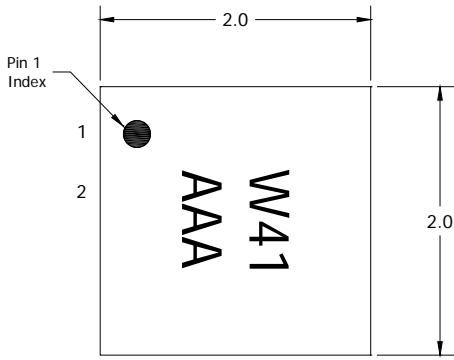


Top View

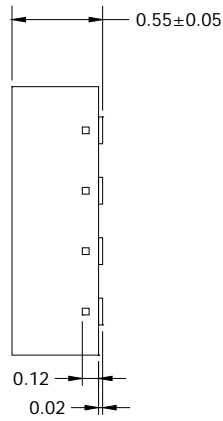


Side View

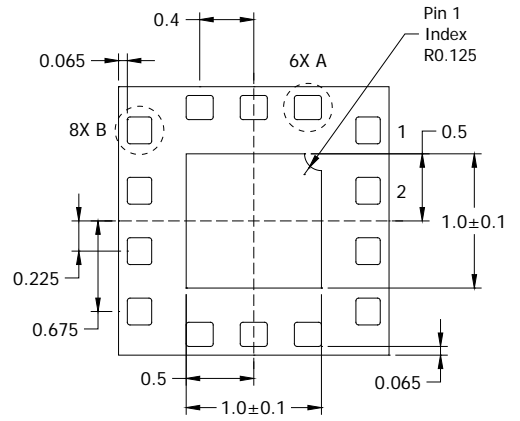

Bottom View

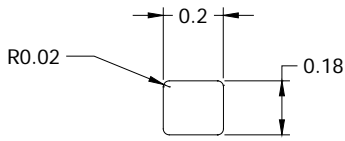


Detail A
Scale: 2X

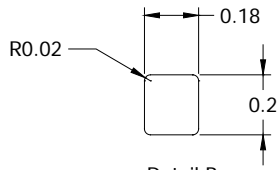

Detail B
Scale: 2X

Unit: mm

Solder Land Pattern

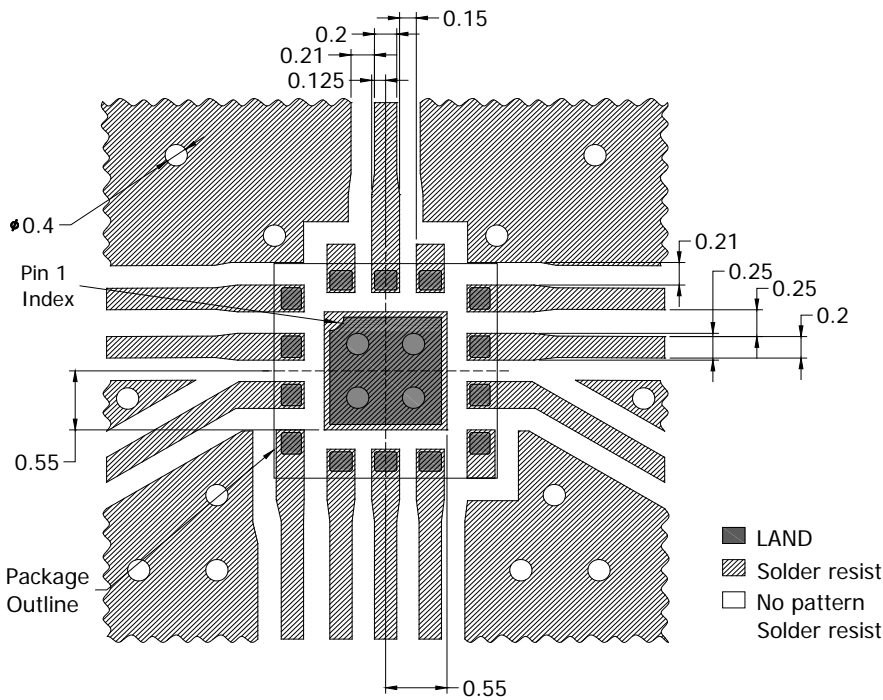

Unit : mm

Line width to be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

Approval Sheet


Reliability test

TEST	PROCEDURE / TEST METHOD	REQUIREMENT
Solderability JIS C 0050-4.6 JESD22-B102D	*Solder bath temperature : $255 \pm 5^{\circ}\text{C}$ *Immersion time : 5 ± 0.5 sec Solder : Sn3Ag0.5Cu for lead-free	At least 95% of a surface of each terminal electrode must be covered by fresh solder.
Leaching (Resistance to dissolution of metallization) IEC 60068-2-58	*Solder bath temperature : $260 \pm 5^{\circ}\text{C}$ *Leaching immersion time : 30 ± 0.5 sec Solder : SN63A	Loss of metallization on the edges of each electrode shall not exceed 25%.
Resistance to soldering heat JIS C 0050-5.4	*Preheating temperature : $120\sim 150^{\circ}\text{C}$, 1 minute. *Solder temperature : $270\pm 5^{\circ}\text{C}$ *Immersion time : 10 ± 1 sec Solder : Sn3Ag0.5Cu for lead-free Measurement to be made after keeping at room temperature for 24 ± 2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-30 \sim 90^{\circ}\text{C}$. Loss of metallization on the edges of each electrode shall not exceed 25%.
Adhesive strength of termination JIS C 0051- 7.4.3	*Pressurizing force : $5\text{N}(\leq 0603)$; $10\text{N}(>0603)$ *Test time : 10 ± 1 sec	No remarkable damage or removal of the termination.
Drop test JIS C 0044 Customer's specification.	*Height : 75 cm *Test Surface : Rigid surface of concrete or steel. *Times : 6 surfaces for each units ; 2 times for each side.	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-30 \sim 90^{\circ}\text{C}$.
Vibration JIS C 0040	*Frequency : $10\text{Hz}\sim 55\text{Hz}\sim 10\text{Hz}(1\text{min})$ *Total amplitude : 1.5mm *Test times : 6hrs.(Two hrs each in three mutually perpendicular directions)	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-30 \sim 90^{\circ}\text{C}$.
Bending test JIS C 0051- 7.4.1	The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm/s per second until the deflection becomes 1mm and then pressure shall be maintained for 5 ± 1 sec. Measurement to be made after keeping at room temperature for 24 ± 2 hours	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-30 \sim 90^{\circ}\text{C}$.
High temperature JIS C 0021	*Temperature : $90^{\circ}\text{C}\pm 2^{\circ}\text{C}$ *Test duration : $1000+24/-0$ hours Measurement to be made after keeping at room temperature for 24 ± 2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-30 \sim 90^{\circ}\text{C}$.

Approval Sheet

Low temperature JIS C 0020	*Temperature : $-30^{\circ}\text{C}\pm 2^{\circ}\text{C}$ *Test duration : $1000+24/-0$ hours Measurement to be made after keeping at room temperature for 24 ± 2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-30 \sim 90^{\circ}\text{C}$.
Temperature cycle JIS C 0025	1. 30 ± 3 minutes at $-30\pm 3^{\circ}\text{C}$, 2. 10~15 minutes at room temperature, 3. 30 ± 3 minutes at $+90\pm 3^{\circ}\text{C}$, 4. 10~15 minutes at room temperature, Total 100 continuous cycles Measurement to be made after keeping at room temperature for 24 ± 2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-30 \sim 90^{\circ}\text{C}$.
High temperature operation life (HTOL)	*Temperature : 90°C *VDD = 4.8V *Time : $1000+24/-0$ hrs. Measurement to be made after keeping at room temperature for 24 ± 2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within $-30 \sim 90^{\circ}\text{C}$.

Soldering Condition

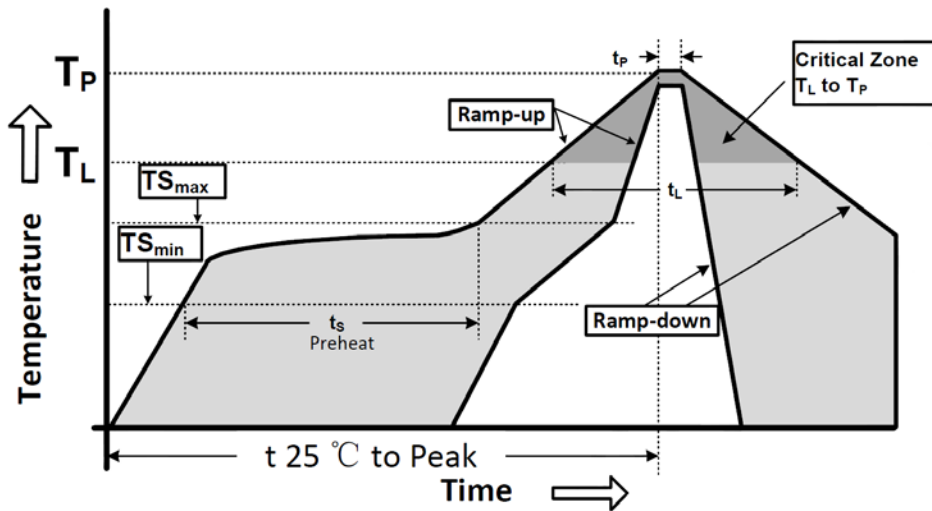

Soldering Condition as Below

Profile Parameter	Lead-Free Assembly, Convection, IR/Convection
Ramp-up rate ($T_{S_{max}}$ to T_p)	$3^{\circ}\text{C}/\text{second}$ max.
Preheat temperature ($T_{S_{min}}$ to $T_{S_{max}}$)	150°C to 200°C
Preheat time (t_s)	60 - 180 seconds
Time above T_L , 217°C (t_L)	60 - 150 seconds
Peak temperature (T_p)	260°C
Time within 5°C of peak temperature (t_p)	20 - 40 seconds
Ramp-down rate	$6^{\circ}\text{C}/\text{second}$ max.
Time 25°C to peak temperature	8 minutes max.


Approval Sheet

Ordering code

RF	ASW	K	H4414A	T
RF module RF: Walsin RF Switch Device	Module type ASW: Antenna Switch	Application K: SP4T	Design Code	Packing T: Taping

Minimum Ordering Quantity: 3000 pcs per reel.


Packaging

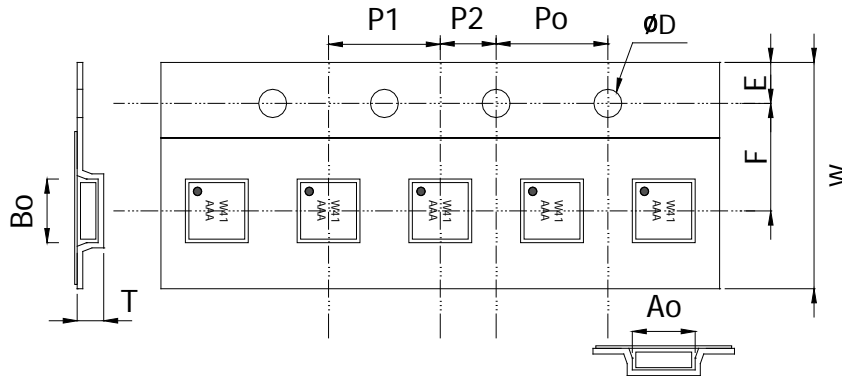

Plastic Tape specifications (unit :mm)

Index	Ao	Bo	φD	T	W
Dimension (mm)	2.30 ± 0.10	2.30 ± 0.10	1.50 ± 0.05	0.70 ± 0.10	8.0 ± 0.30
Index	E	F	Po	P1	P2
Dimension (mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.20	4.00 ± 0.10	2.00 ± 0.05

Reel dimensions

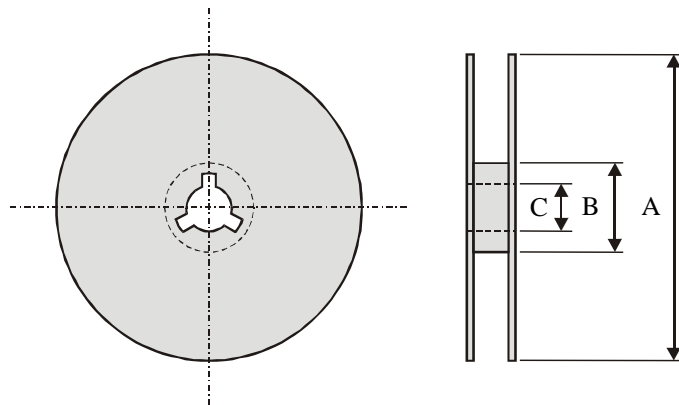

Index	A	B	C
Dimension (mm)	Φ178.0	Φ54.0	Φ13.2

Taping Quantity : 3000 pieces per 7" reel

Approval Sheet

Caution of handling

Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects, which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (2) Aerospace equipment
- (3) Undersea equipment
- (4) Medical equipment
- (5) Disaster prevention / crime prevention equipment
- (6) Traffic signal equipment
- (7) Transportation equipment (vehicles, trains, ships, etc.)
- (8) Applications of similar complexity and /or reliability requirements to the applications listed in the above.

Storage condition

- (1) Products should be used in 6 months from the day of WALSIN outgoing inspection, which can be confirmed.
- (2) Storage environment condition.
 - Products should be storage in the warehouse on the following conditions.
 - Temperature : -10 to +40°C
 - Humidity : 30 to 70% relative humidity
 - Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.
 - Products should be storage on the palette for the prevention of the influence from humidity, dust and son on.
 - Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.
 - Products should be storage under the airtight packaged condition.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Switch ICs](#) category:

Click to view products by [Walsin](#) manufacturer:

Other Similar products are found below :

[MASW-004100-11930W](#) [MASW-008853-TR3000](#) [MASW6010G](#) [BGSX210MA18E6327XTSA1](#) [CG2185X2](#) [CG2415M6](#) [MA4AGSW1A](#)
[MA4SW410](#) [MA4SW410B-1](#) [MASW-002102-13580G](#) [MASW-005100-11940W](#) [BGS 12PL6 E6327](#) [BGS1414MN20E6327XTSA1](#)
[BGS1515MN20E6327XTSA1](#) [SKY13374-397LF](#) [CG2415M6-C2](#) [AS222-92LF](#) [MASWSS0201TR](#) [MASW-007075-000100](#) [MASW-004103-13655P](#) [MASW-003102-13590G](#) [MASWSS0202TR-3000](#) [MASW-008543-TR3000](#) [MA4SW310B-1](#) [SW-313-PIN](#) [CG2430X1](#) [SKY13405-490LF](#) [SKYA21001](#) [SKY13415-485LF](#) [MMS008PP3](#) [SKY13319-374LF](#) [SKY13404-466LF](#) [SKY13473-569LF](#) [SKY13626-685LF](#)
[NJG1809ME7-TE1](#) [SKY13343-92LF](#) [MASW-002103-13635P](#) [SKY13417-485LF](#) [MASW-004103-13650P](#) [NJG1649HB6](#)
[RFASWE660DTF03](#) [BGSA14GN10E6327](#) [FM1694C](#) [XMSS1R6G0PA-001](#) [AW13612FLR](#) [AW13102DNR](#) [FM3418C](#) [AW13508QNR](#)
[AW13418RQNR](#) [FM8648M](#)