

LTCC Multi Layer Ceramic Band Pass Filter- 1608 (0603) size

– RFBPF1606K358Q1C

FEATURES

- Miniature footprint: 1.6 X 0.8 X 0.6 mm³
- Loss Insertion Loss
- High Rejection Rate
- LTCC process

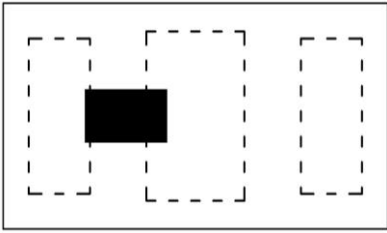
APPLICATIONS

- 5150 ~ 7125 MHz working frequency

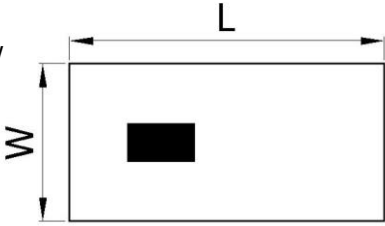


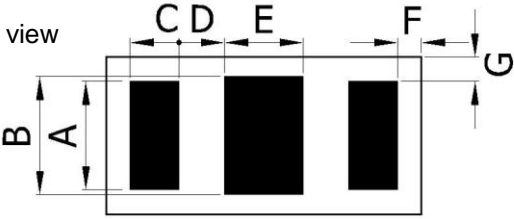
ELECTRICAL CHARACTERISTICS

Item	Specification
Frequency Range	5150 ~ 7125 MHz
Insertion Loss	0.9 dB typ. at +25°C
Attenuation	45 dB typ. @ 100 – 960 MHz 43 dB typ. @ 1160 – 1250 MHz 41 dB typ. @ 1420 – 1610 MHz 41 dB typ. @ 1690 – 2200 MHz 41 dB typ. @ 2300 – 2370 MHz 42 dB typ. @ 2400 – 2490 MHz 42 dB typ. @ 2490 – 2690 MHz 48 dB typ. @ 3300 – 3800 MHz 25 dB typ. @ 3800 – 4200 MHz 42 dB typ. @ 9600 – 9800 MHz 45 dB typ. @ 10300 – 11850 MHz 34 dB typ. @ 11850 – 14250 MHz 24 dB typ. @ 15450 – 21750 MHz
VSWR	2.0
Impedance	50 Ω
Power Capacity	2W max.
Moisture sensitivity levels	MSL is LEVEL 1 (Refer to : IPC/JEDEC J-STD-020)
HBM ESD	Pass 1KV on all pins (Base on AEC-Q200-002)
MM ESD	Pass 200V (Base on EIA/JESD22-A115)
Operating & Storage Condition (Component)	
Operation Temperature Range: -40 ~ +85 °C	
Storage Temperature Range: -40 ~ +85 °C	
Storage Condition before Soldering (Included packaging material)	
Taping Quantity : 4000pcs per 7" reel	
Storage Temperature Range: +5 ~ +40 °C	
Humidity: 30 to 70% relative humidity	

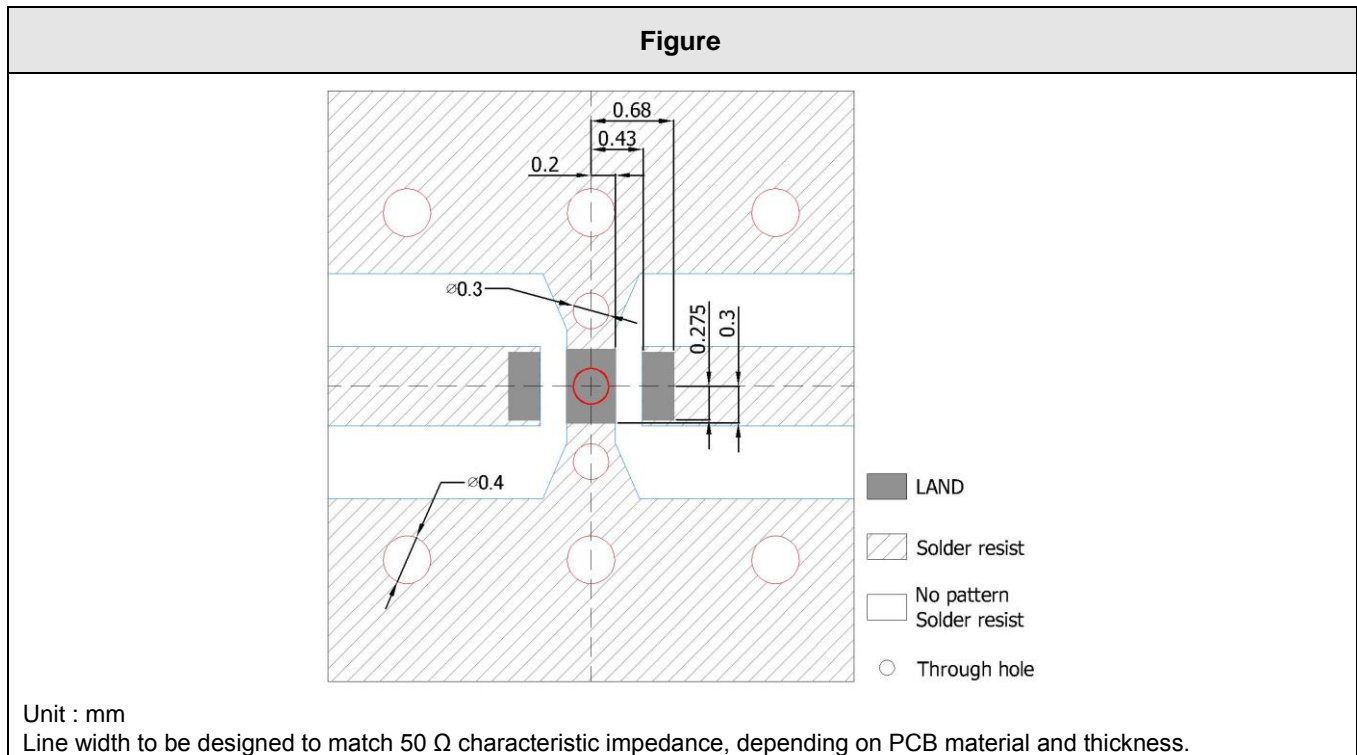
CONSTRUCTION

Figure	PIN	Connection
Top view 	1	Input
	2	GND
	3	Output

DIMENSIONS

Figure	Symbol	Dimension (mm)
Top view 	L	1.60 ± 0.10
	W	0.80 ± 0.10
Side view 	T	0.60 ± 0.10
	A	0.55 ± 0.10
Side view 	B	0.60 ± 0.10
	C	0.25 ± 0.10
Bottom view 	D	0.23 ± 0.10
	E	0.40 ± 0.10
	F	0.12 ± 0.10
	G	0.125 ± 0.10

LAND PATTERN



CONTACT INFORMATION

For more information, please contact with

Walsin Technology Corporation.

Tel : 886-3-475-8711

Fax : 886-3-475-5197

E mail : info@passivecomponent.com

Web Site : http://www.passivecomponent.com

Specification subject to change without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Walsin](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)
[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)
[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)
[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)
[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)
[B39242B4360P810](#) [B39781B8005P810](#)