

I-T Characteristics / 時間-電流特性

Ampere Rating 額定電流	% of Ampere Rating 額定電流%	Opening Time 熔斷時間
250mA-6.3A	150%	1 Hr Min. / 最短1小時
8A-15A		30min Min. / 最短30分鐘
250mA-15A	210%	30min Max. / 最長30分鐘
250mA-4A	275%	10ms Min. 2s Max. / 最短10毫秒, 最長2秒
5A-6.3A		10ms Min. 3s Max. / 最短10毫秒, 最長3秒
8A-15A	400%	40ms Min. 20s Max. / 最短40毫秒, 最長20秒
250mA-6.3A		3ms Min. 300ms Max. / 最短3毫秒, 最長300毫秒
8.0A-15A	1000%	10ms Min. 1s Max. / 最短10毫秒, 最長1秒
250mA-6.3A		20ms Max. / 最長20毫秒
8.0A-15A		30ms Max. / 最長30毫秒


In accordance with IEC60127-2 standard, sheet1 / 遵循 IEC60127-2, 規格單1



Product Features / 產品特性

Materials 材質	Body / 本體: Ceramic tube / 陶瓷管 Lead / 引線: Tinned copper wire / 鍍錫銅線 Cap / 銅帽: Brass with nickel plated / 銅鍍鎳 Element / 熔絲: Alloy / 合金線
Operating Temperature 操作溫度	-55°C to +125°C (Consider de-rating / 需考慮溫度折減)
Solderability 可焊性	260°C, ≤ 3s. (Wave / 波峰焊) 350±10°C, ≤ 3s. (Soldering iron / 烙鐵焊)
Resistance to Soldering Heat 耐焊接熱	260°C, 10s. (Wave / 波峰焊) 350°C, 5s. (Soldering iron / 烙鐵焊)
Recommended Soldering Parameters 建議錫參數	Wave soldering parameter / 波峰焊 Soldering pot temperature / 錫爐溫度: 260°C Max Solder dwell time / 焊接時間: 2~5s
	Hand welding parameter / 手工焊 Soldering iron temperature / 烙鐵溫度: 350±5°C Solder dwell time / 焊接時間: 5s Max.
Storage Conditions 儲存條件	Can be stored for 3 years under tight seal condition at temperature of +10°C~60°C, relative humidity ≤ 75%. 在溫度+10°C~60°C, 相對濕度 ≤ 75% 的密閉條件下可存放 3 年。 At most can be kept 30 days at temperature +10°C~60°C, relative humidity ≤ 95% under covered conditions. 在溫度+10°C~60°C, 相對濕度為 95% 的非露天下最多可存放 30 天。

Dimensions / 尺寸圖 (Unit / 單位:mm)

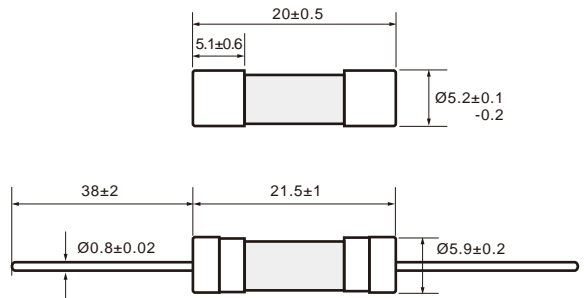

Electrical Characteristics / 電氣特性

Rated Current 額定電流	Rated Voltage 額定電壓	Breaking Capacity 分斷能力	Safety Approvals 安全認證					
			C _{RU} ® US	VDE	VDE	UL	CCC	PS JET
250mA	250V	250mA~15A 1500A@250V AC	●	●		●	●	
315mA	250V		●	●		●	●	
400mA	250V		●	●		●	●	
500mA	250V		●	●		●	●	
630mA	250V		●	●		●	●	
800mA	250V		●	●		●	●	
1.00A	250V		●	●		●	●	●
1.25A	250V		●	●		●	●	●
1.60A	250V		●	●		●	●	●
2.00A	250V		●	●		●	●	●
2.50A	250V		●	●		●	●	●
3.15A	250V		●	●		●	●	●
4.00A	250V		●	●		●	●	●
5.00A	250V		●	●		●	●	●
6.30A	250V		●	●		●	●	●
8.00A	250V		●	●		●	●	●
10.0A	250V		●	●		●	●	●
12.0A	250V	●	●		●	●	●	
15.0A	250V	●	●	●		●	●	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [Walter](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [TF16SN2.00TTD](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308001.UR](#)
[FCC16202ABTP](#) [F0603G0R03FNTR](#) [7010.9962.63](#) [SEF 12A 65V \(G\)](#) [MST 250mA 250V](#) [TB60](#) [06 100.4](#) [TBF50](#) [TBF40](#)
[2010T315mA250V](#) [06 110.7](#) [12 100.1.5](#) [06 110.5](#) [1206FA-R250](#) [R06.100.6](#) [R12.100.15](#) [R06.000.0.375](#) [R06.000.6](#) [R06.100.0.25](#) [R12.000.8](#)
[R06.100.0.75](#) [R06.100.0.375](#) [R06.100.0.5](#) [R06.000.7](#) [R06.100.7](#) [S0603-S-2.0A](#) [F06F3.5](#) [F12F20](#) [TA3VT2](#) [F12F1](#) [F06F7](#) [F06T3.5](#)
[F06F0.375](#) [F06T8](#) [F12F30](#) [4T2A250V](#) [R12.100.7](#) [R12.100.30](#) [R06.000.0.25](#) [R12.100.6](#) [R12.000.0.25](#) [R12.000.6](#) [R12.000.10](#)