

I-T Characteristics / 時間-電流特性

Ampere Rating 額定電流	% of Ampere Rating 額定電流%	Opening Time 熔斷時間
200mA~6.3A	150%	1 Hr Min. / 最短1小時
8A~15A		30min Min. / 最短30分鐘
200mA~15A	210%	30min Max. / 最長30分鐘
200mA~15A	275%	50ms Min. 2s Max. / 最短50毫秒,最長2秒
200mA~6.3A	400%	10ms Min. 300ms Max. / 最短10毫秒,最長300毫秒
8.0A~15A		10ms Min. 400ms Max. / 最短10毫秒,最長400毫秒
200mA~6.3A	1000%	20ms Max. / 最長20毫秒
8.0A~15A		40ms Max. / 最長40毫秒


In accordance with IEC60127-2 standard, sheet2 / 遵循IEC60127-2, 規格單2



Product Features / 產品特性

Materials 材質	Body / 本體: glass tube / 玻璃管 Lead / 引線: tinned copper wire / 鍍錫銅線 Cap / 銅帽: brass with nickel plated / 銅鍍鎳 Element / 熔絲: alloy / 合金線
Operating Temperature 操作溫度	-55°C to +125°C (consider de-rating / 需考慮溫度折減)
Solderability 可焊性	260°C, ≤ 3s. (wave / 波峰焊) 350±10°C, ≤ 3s. (soldering iron / 烙鐵焊)
Resistance to Soldering Heat 耐焊接熱	260°C, 10s. (wave / 波峰焊) 350°C, 5s. (soldering iron / 烙鐵焊)
Recommended Soldering Parameters 建議焊錫參數	Wave soldering parameter / 波峰焊 Soldering pot temperature / 錫爐溫度: 260°C Max Solder dwell time / 焊接時間: 2~5s Hand welding parameter / 手工焊 Soldering iron temperature / 烙鐵溫度: 350±5°C Solder dwell time / 焊接時間: 5s Max.
Storage Conditions 儲存條件	Can be stored for 3 years under tight seal condition at temperature of +10°C~60°C, relative humidity ≤ 75%. 在溫度+10°C~60°C,相對濕度 ≤ 75% 的密閉條件下可存放3年。 At most can be kept 30 days at temperature +10°C~60°C, relative humidity ≤ 95% under covered conditions. 在溫度+10°C~60°C,相對濕度為95%的非露天下最多可存放30天。

Dimensions / 尺寸圖 (Unit / 單位:mm)

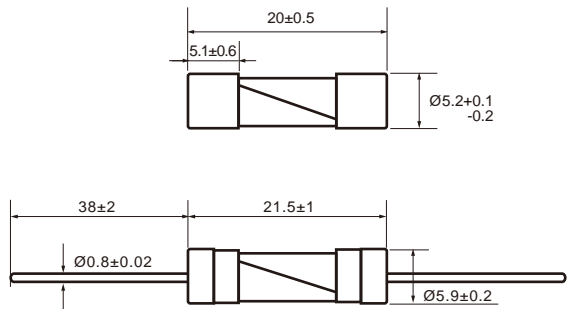

Electrical Characteristics / 電氣特性

Rated Current 額定電流	Rated Voltage 額定電壓	Breaking Capacity 分斷能力	Safety Approvals 安全認證						
			UL	VDE	VDE	CCC	KC	JET	
200mA	250V	200mA~3.15A 35A@250V AC	●	●	●	●	●	●	
250mA	250V		●	●	●	●	●	●	
315mA	250V		●	●	●	●	●	●	
400mA	250V		●	●	●	●	●	●	
500mA	250V		●	●	●	●	●	●	
630mA	250V		●	●	●	●	●	●	
800mA	250V		●	●	●	●	●	●	
1.00A	250V		●	●	●	●	●	●	
1.25A	250V		●	●	●	●	●	●	
1.60A	250V		●	●	●	●	●	●	
2.00A	250V		●	●	●	●	●	●	
2.50A	250V		●	●	●	●	●	●	
3.15A	250V		●	●	●	●	●	●	
4.00A	250V		4A~15A 10IN@250V AC	●	●	●	●	●	●
5.00A	250V			●	●	●	●	●	●
6.30A	250V	●		●	●	●	●	●	
8.00A	125V/250V	●		●	●	●	●	●	
10.0A	125V/250V	●		●	●	●	●	●	
12.0A	125V/250V	●		●	●	●	●	●	
15.0A	125V/250V	●		●	●	●	●	●	

Remark: *FSD 8A~15A approved KC 250V only. *125V Voltage only for UL, VDE and VDE.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [Walter](#) manufacturer:

Other Similar products are found below :

[MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#) [FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [12C10X38GI](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S501-3-15-R](#) [BK1-S505-1-R](#) [BK1-S506-3-15-R](#) [BK/C515S-250-R](#) [S501-V-10A](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [GBB-17-1/2](#) [301001](#) [301020](#) [311008](#) [31301.5H-XP](#) [313.25](#) [313.75](#) [334006](#) [361.250](#)