

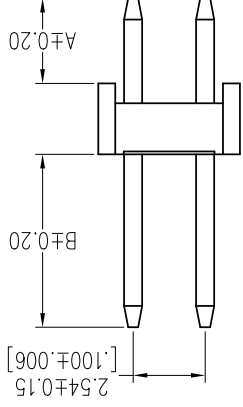
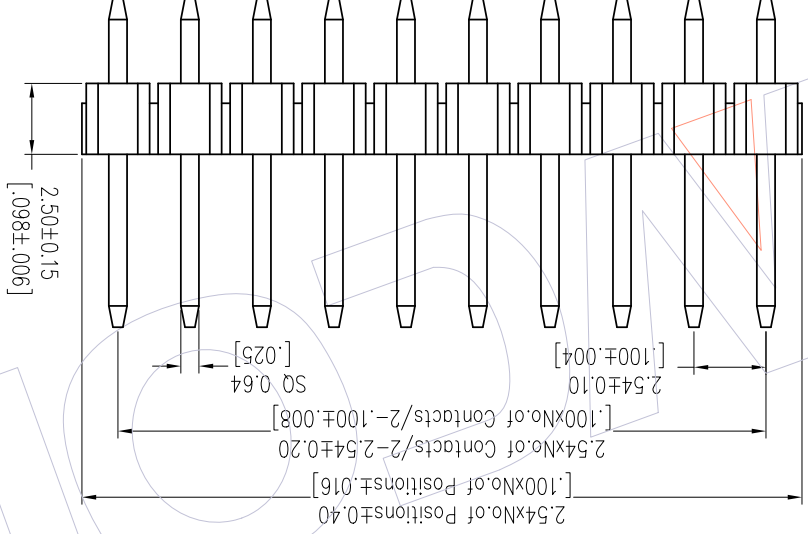


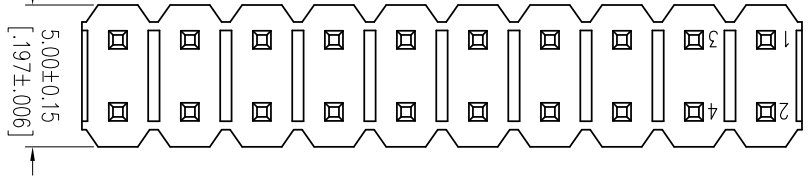

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

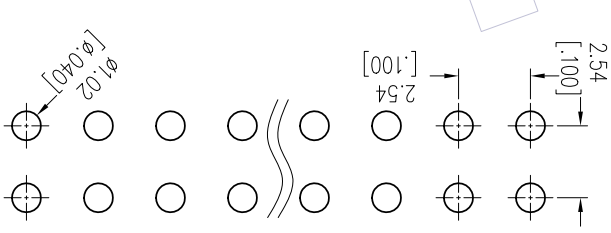

NOTES:
Rated Current: 3.0AMP.
Contact Resistance: 20mΩ Max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min.
Operation Temperature: -40℃ to +105℃
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA9T+3%GF UL94V-0 BK

Ordering Information

1125-12 XX XX S XXX C 0 XX

No. of Pins Contact Plating Pin Length Insulator Packing Series No.
Per Row: 02-40 GO=Gold Flash L=A+B+2.5 Material 0=PE Bag 01-99
G3=10u"Gold Standard:085=8.5 C=PA9T T=Tube
G4=15u"Gold 095=9.5
G5=30u"Gold 105=10.5
S0=Gold Flash/Tin 116=11.6
S3=10u"Gold/Tin 118=11.8
S4=15u"Gold/Tin 135=13.5
S5=30u"Gold/Tin 135=13.5
SN=Tin
SM=Matte Tin

Item	Pin Length	A	B	Mating
Standard	8.50	3.00	3.00	2135
	9.50	3.00	4.00	2145
	10.50	3.00	5.00	2150
	11.60	3.00	6.10	2171 2185
	11.80	2.40	6.90	2171 2185
	13.50	3.00	8.00	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	CUSTOMER NO.	WCON-Donguan	WCON-Kunshan
A3	2018/06/02	Cancel PBT & Modify P/N	A3	X.X	±0.40	Surong Xu	2018/06/02	PH2.54 DUAL ROW S/T H=2.5	1125-12XXXXXXC0XX	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sdies@wcon.com	Tel: +86 512 57468408 E-mail: sdiesks@wcon.com
A2	2018/01/22	Modify P/N	A2	X.XX	±0.25	CHECK					
A1	2016/02/19	MODIFY DRAWING		X.XXX	±0.15						
A0	2012/05/28	NEW		Angle	±.3	APPROVE					



Http: www.wcon.com

WCON-Kunshan

WCON-Donguan

Tel: +86 512 57468408
E-mail: sdiesks@wcon.com

Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sdies@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)