



NOTES:

Rated Current:3.0AMP.

Contact Resistance:20ms Max.

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min.

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:PA9T+33%GF UL94V-0 BK


Ordering Information

1125-12 XX XX M XXX C R XX Δ

No of Pins Contact Plating Pin Length Insulator Packing Material T=Tube P=Tube+CAP C=PA9T R=Tube & Reel+CAP Series No. 01-99

Per Row:02-40 G0=Gold Flash L=B+D+2.5+ $\frac{W}{2}$ Standard:082=8.2 102=10.2 G4=15u"Gold G5=30u"Gold 111=11.1 S0=Gold Flash/Tin 115=11.5 S3=10u"Gold/Tin 136=13.6 S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Mate Tin

Item	Pin Length	W	E	B	Mating
8.20	7.50	3.34	3.00	2.135	
10.20	7.50	3.34	5.00	2.150	
11.10	7.50	3.34	5.90	2.171 2.185	
11.60	7.50	3.74	6.00	2.171 2.185	
13.60	7.50	3.74	8.00		

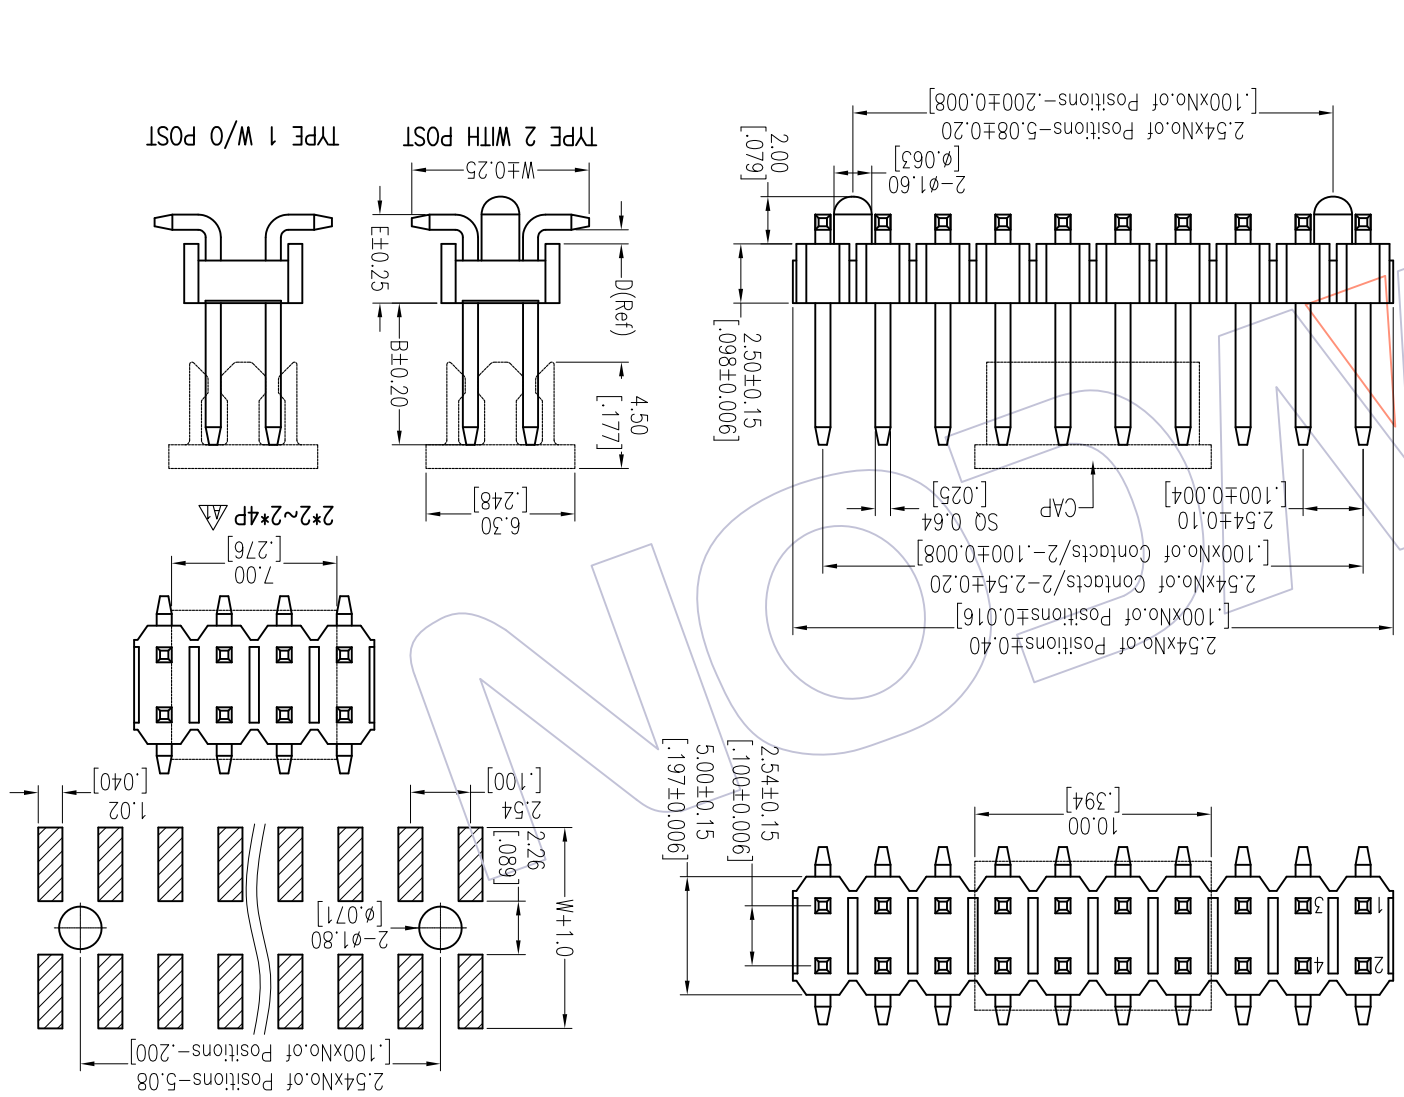

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE \pm 0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DATE	SCALE	FIT	PART NO.
A2	2018/01/22	Modify P/N	Δ	X.X	\pm 0.40	DRAW	2018/01/22	mm		1125-12XXXXMXXXCRRX
A1	2012/10/31	Modify Drawing	----	X.XXX	\pm 0.25	CHECK				
A0	2012/05/28	NEW	----	Angle \pm 3'		APPROVE				

PROJ.	DATE	APPROVE	DATE	CHECK	DATE	SIZE	SHEET	Customer NO.
Δ						A4	1/1	

DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
2018/01/22	mm		1125-12XXXXMXXXCRRX	PH2.54 DUAL ROW SMT H=2.5	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sdies@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sdiesks@wcon.com



Http: www.wcon.com

WCON-Dongguan

WCON-Kunshan

Tel: +86 769 85358920

Fax: +86 769 85358915

E-mail: sdies@wcon.com

E-mail: sdiesks@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)