
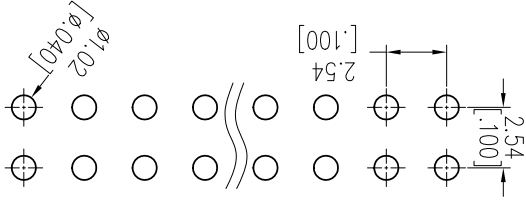


Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE±0.05)






**NOTES:**  
 Rated Current: 3.0AMP.  
 Contact Resistance: 20mΩ Max.  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PA9T+33%GF UL94V-0 BK

**Ordering Information**

**1125-22 XX XX S XXX C 0 XX**

A1  
 A2  
 Pin Length  
 Contact Plating  
 No. of Pins  
 Insulator Packing  
 Material  
 Standard:  
 L=A+B+C  
 G0=Gold Flash  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold  
 G=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 SN=Tin  
 SM=Matte Tin  
 Per Row: 02~40  
 G0=Gold Flash  
 L=A+B+C  
 Material  
 Standard:  
 C=PA9T  
 T=Tube  
 Series No. 01~99

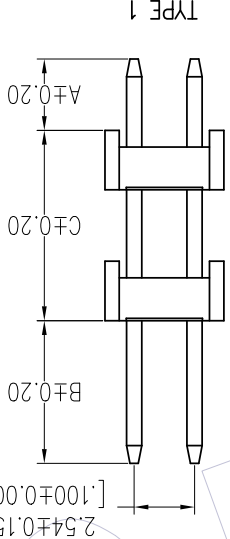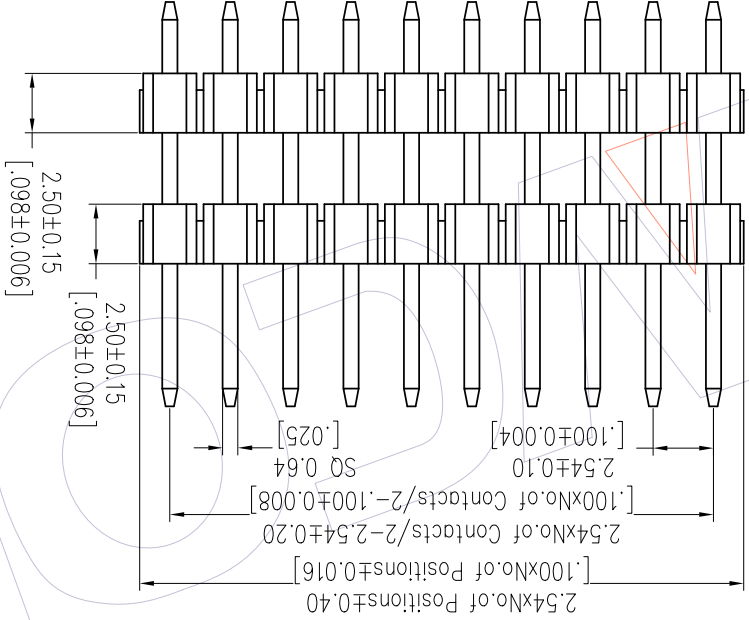

Item	Pin Length	A	B	C	Mating
Standard	---	3.00	6.00	---	2171 2185
Alternate	---				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE	DATE	PROJ.	Customer NO.	Customer NO.
A0	2012/05/28	NEW	----	Angle ± 3°					
A1	2018/01/22	Modify P/N	A1	X.XXX ±0.15			SHEET 1/1		
A2	2018/06/02	Cancel PBT & Modify P/N	A2	X.XX ±0.25	CHECK	DATE	SIZE A4	PH2.54 DUAL ROW	WCON-Donggun
				X.X ±0.40	XSR	2018/06/02	UNIT mm	DOUBLE PLASTIC 180° H=2.5	WCON-Kunshan
					OPERATION DRAW	DATE	SCALE	TITLE: 1125-22XXXXXXSC0XX	Http: www.wcon.com

**WCON**

WCON-Donggun  
 Tel: +86 769 85358920 Fax: +86 769 85358915  
 E-mail: sdes@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408 Fax: +86 512 57468408  
 E-mail: sdesks@wcon.com

Http: www.wcon.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Wcon](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)