




Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE±0.05)

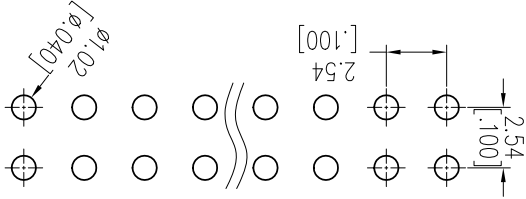

NOTES:  
Rated Current: 3.0AMP.  
Contact Resistance: 20mΩ Max.  
Withstand Voltage: 1000V AC/DC  
Insulation Resistance: 1000MΩ Min.  
Operation Temperature: -40℃ to +105℃





Contact Material: Brass  
Contact Plating: Au or Sn Over Ni  
Insulator Material: PA9T+33%G.F UL94V-0 BK

Insulator Material: PA9T+33%G.F UL94V-0 BK

### Ordering Information

1125-22 XX XX S XXX C 0 XX

No. of Pins Contact Plating Pin Length Insulator Packing Series No.  
Per Row: 02~40 G0=Gold Flash L=A+B+C Material C=PA9T T=Tube  
G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin

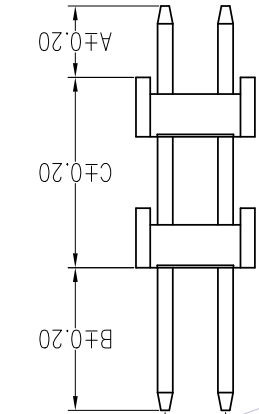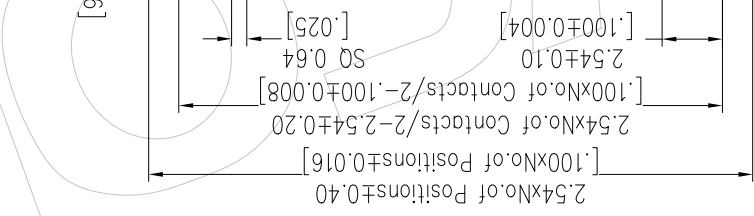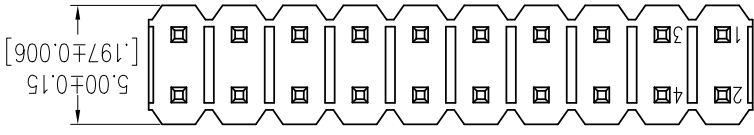

Item	Pin Length	A	B	C	Mating
Standard	---	3.00	6.00	---	2171 2185
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DATE	SCALE	FIT	PART NO.	TITLE:	UNIT	mm	SIZE	A4	SHEET	1/1	PROJ.	Customer NO.	Customer NO.	WCON-Dongguan	WCON-Kunshan	
A0	2012/05/28	NEW	----	Angle	±.3°	APPROVE	DATE																
A1	2018/01/22	Modify P/N	△1	X.XXX	±0.15	CHECK	DATE																
A2	2018/06/02	Cancel PBT & Modify P/N	△2	X.X	±0.40	XSR	2018/06/02																
				X.X	±0.40	DRAW	DATE																

WCON-Dongguan  
Tel: +86 769 85358920  
Fax: +86 769 85358915  
E-mail: sdles@wcon.com

WCON-Kunshan  
Tel: +86 512 57468408  
Fax: +86 512 57468408  
E-mail: sdlesks@wcon.com



Http: www.wcon.com

PH2.54 DUAL ROW  
DOUBLE PLASTIC 180° H=2.5

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Wcon](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)