HSF

NOTES:
Rated Current: 3.0AMP.
Contact Resistance: 20mΩ Max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min.
Operation Temperature: −40℃ to +105℃

Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA9T+33%G.F UL94V−0 BK
A2



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

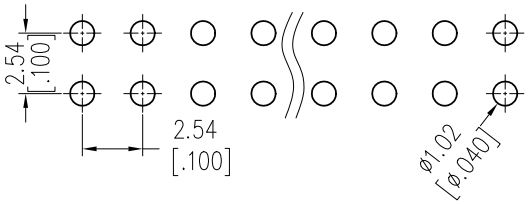

Ordering Information

1125-22 XX XX S XXX C 0 XX A1 (A2)

- No.of Pins Per Row: 02~40
- Contact Plating: G0=Gold Flash; G3=10u"Gold; G4=15u"Gold; G5=30u"Gold; S0=Gold Flash/Tin; S3=10u"Gold/Tin; S4=15u"Gold/Tin; S5=30u"Gold/Tin; SN=Tin; SM=Matte Tin
- Pin Length: L=A+B+C Standard:
- Insulator Material: C=PA9T
- Packing: 0=PE Bag; T=Tube
- Series No.: 01~99

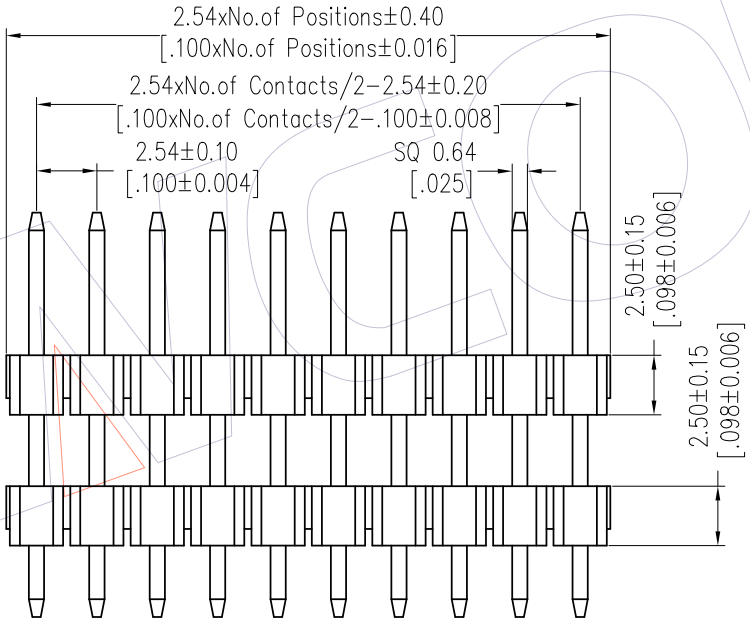

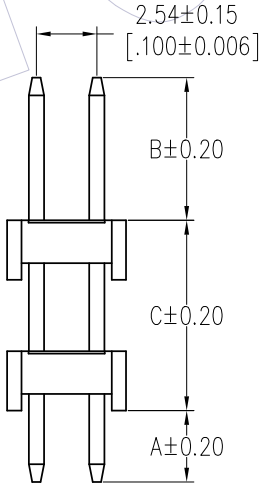

TYPE 1

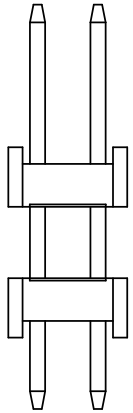

TYPE 2

Item	Pin Lenght	A	B	C	Mating
Standard	---	3.00	6.00	---	2171 2185
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2018/06/02	Cancel PBT & Modify P/N	A2
A1	2018/01/22	Modify P/N	A1
A0	2012/05/28	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	DATE	SCALE	Fit
XSR	2018/06/02	UNIT	mm
CHECK	DATE	SIZE	A4
		SHEET	1/1
APPROVE	DATE	PROJ.	

PART NO. 1125-22XXXXSXXXC0XX A1 A2

TITLE: PH2.54 DUAL ROW DOUBLE PLASTIC 180° H=2.5

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings ***category:***

Click to view products by Wcon ***manufacturer:***

Other Similar products are found below :

95000-104TRLF 10135584-644402LF DF62W-EP2022PCA 95000-106TRLF DF62W-2022SCA DF62W-EP2022PC 2203348 DF62W-2022SC 1084018 1029039 1084017 802-10-012-10-002000 1112640 1112639 891-007-9SS-BST1T 000-34000 0008550134 0009482033 0009507031 57102-F02-18ULF 57102-S06-03LF 57202-S52-04LF PCN6-15S-2.5E 0039019024 58102-G61-06LF 582553-1 0009485154 0009508121 0022285053 0050291907 018731A LY20-4P-DT1-P1E-BR 02.125.8002.8 60101931 60598-1 (Cut Strip) M1625-3R/100 61062-3 61082-181009 CSU011177004 636-1427 638009-1 641938-9 641991-4 644168-1 644827-2 647662-1 65039-019ELF 65692-001LF 65781-018 65781-047