

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN)

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+33%G.F UL94V-0

Ordering Information

2135-1XX M XX CUN X X



- Series No.
- 1=TYPE 1
- 2=TYPE 2
- Packing:
 - T=Tube
 - P=Tube+CAP
 - R=Tape&Reel+CAP
- G4=15μ"Gold
- G3=10μ"Gold
- G=30μ"Gold
- G5=30μ"Gold
- S0=Gold Flash/Tin
- S3=10μ"Gold/Tin
- S4=15μ"Gold/Tin
- S5=30μ"Gold/Tin
- SN=Tin
- SM=Matte Tin

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANG	DIM	TOL	APPROVE	DATE	PROJ.	CUSTOMER NO.	WCON- Dongguan	WCON-Kunshan
A0	2012/08/02	NEW	---	Angle ± 3°	± .3°	APPROVE	DATE	PROJ.	Customer NO.	Tel: +86 769 85358915	E-mail: sales@wcon.com
A1	2018/05/07	MODIFY CAP : ADD DIM.	---	X.XXX ±0.15	±0.15	CHECK	DATE	SHEET 1/1	H=3.5	Fax: +86 512 57468468	
A2	2018/08/18	ADD 1*2P-1*3P CAP;MODIFY DRAWING	---	X.XX ±0.25	±0.25	DATE	2018/08/18	SIZE A4	FH2.54mm SINGLE ROW 180SMT	Tel: +86 512 57468408	Http: www.wcon.com
				X.X ±0.40	±0.40	OPERATION DRAW	DATE	UNIT mm	TITLE: SEE TABLE		
						SCALE	DATE	FIT	PART NO.		

TITLE	PART NO.	SPEC.
TYPE 1	2135-1XXMXXCUNX1	DUAL/ODD PINS
TYPE 2	2135-1XXMXXCUNX2	DUAL PINS

PIN	2-15P	16-25P	26-40P
M	0.10	0.15	0.18

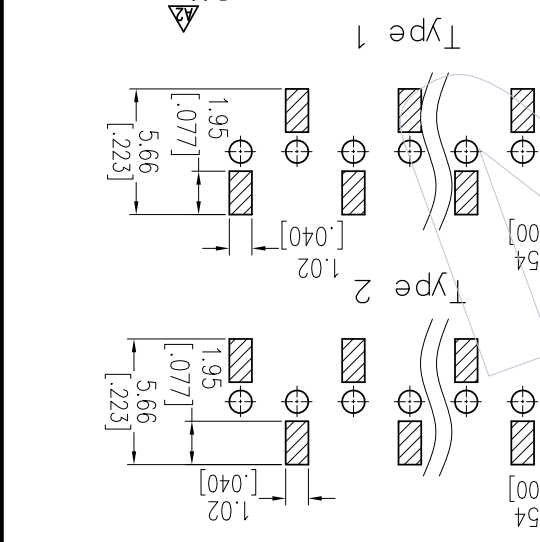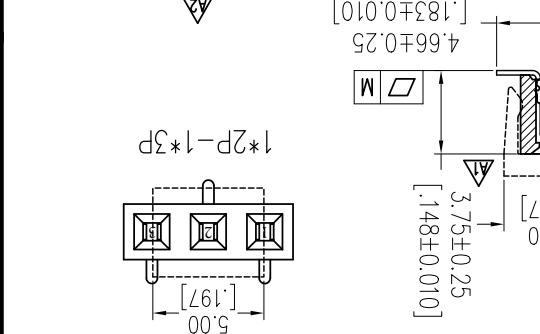

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

10	9	8	7	6	5	4	3	2	1
----	---	---	---	---	---	---	---	---	---

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)