

HSP


NOTES:
 Rated Current: 3.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +125°C(Au)
 -40°C to +105°C(Sn)
 Contact Material: Phosphor Bronze
 Contact Plating: Au Or Sn Over Ni
 Insulator Material: LCP+30%GF UL94V-0

Ordering Information

2185E-2XX S XX DUNT1

No. of Pins per ROW: 02-40PIN
 Contact Plating: G0=Gold Flash
 G3=10µ"Gold
 G4=15µ"Gold
 G5=30µ"Gold
 S0=Gold Flash/Tm
 S3=10µ"Gold/Tm
 S4=15µ"Gold/Tm
 S5=30µ"Gold/Tm
 SN=Tm

Item	Pitch	Standard
Mating	2.54	1115/1120/1125

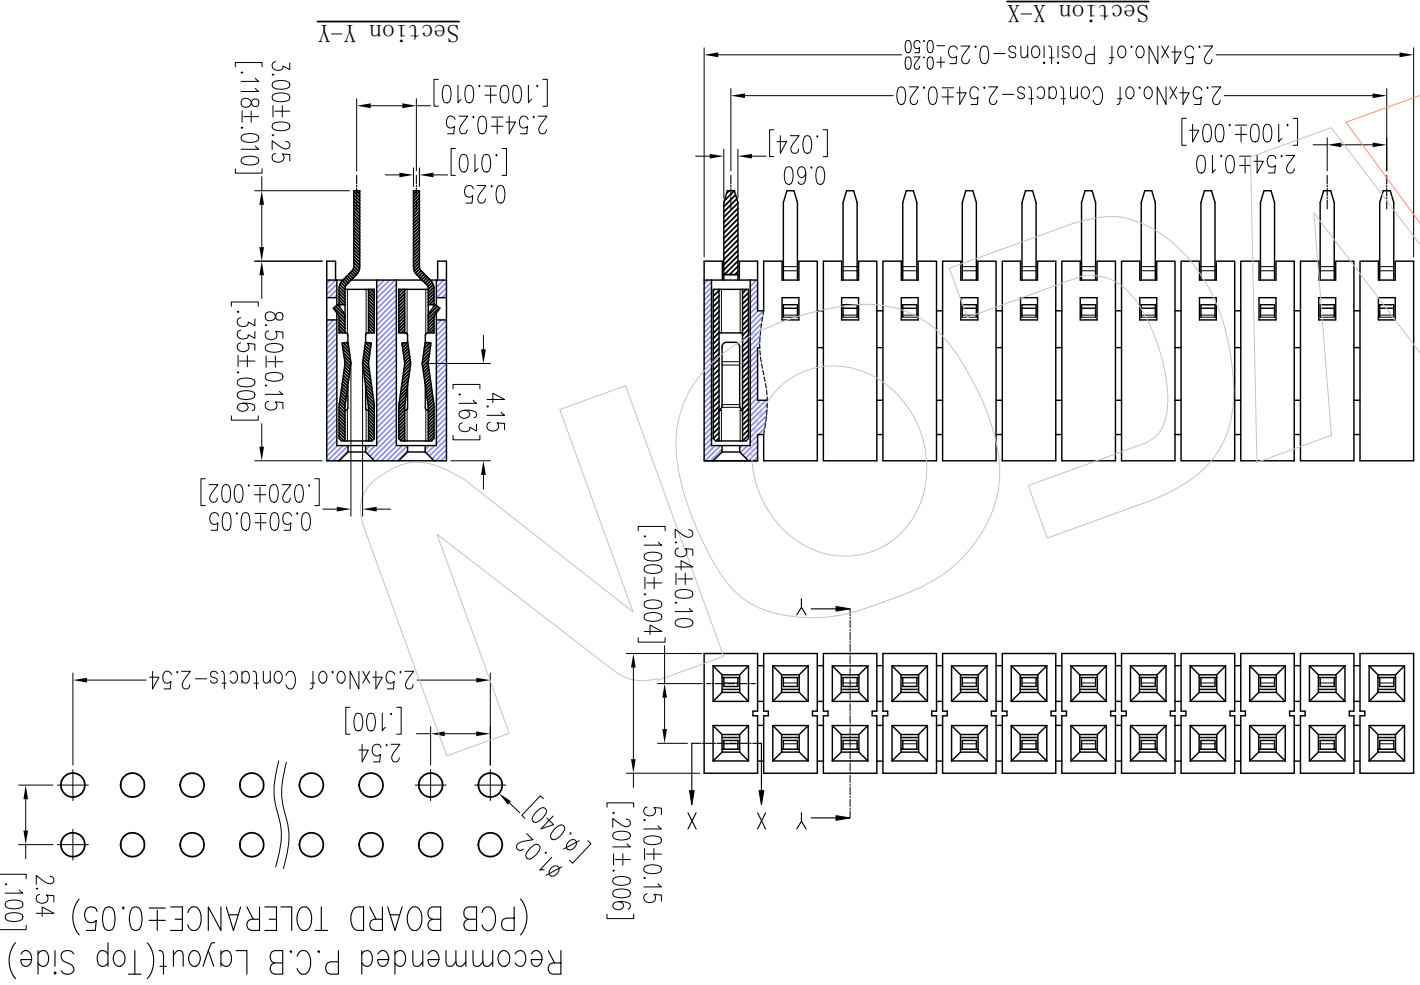

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE	DATE	PROJ.	CUSTOMER NO.	WCON-Donguan	WCON-Kunshan
A0	2019/01/18	NEW	-----	Angle ± 3°	APPROVE	DATE	PROJ.	Customer NO.	Tel: +86 769 85358915	Fax: +86 512 57468468
				X.XXX ±0.15	CHECK	DATE	SIZE	FH2.54 Dual Row H=8.5	E-mail: sdies@wcon.com	
				X.XX ±0.25	XSR	DATE	UNIT	TITLE:	E-mail: sdies@wcon.com	
				X.X ±0.40	OPERATION	DATE	SCALE	PART NO.	E-mail: sdies@wcon.com	
						2019/01/18	mm	2185E-2XXSXXDUNT1	E-mail: sdies@wcon.com	

WCON

Http: www.wcon.com

WCON-Donguan
 Tel: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sdies@wcon.com

WCON-Kunshan
 Tel: +86 512 57468468
 Fax: +86 512 57468468
 E-mail: sdies@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)