




NOTES:

- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au over Ni
- Insulator Material: PA9T+33%G.F UL94V-0
- Cap Material: PA9T+33%G.F UL94V-0

Ordering Information

2228T-2XX M XX CUN X 2

- No. of Pins per Row: 02~22Pin
- Contact Plating: G0=Gold Flash
- G3=10μ"Gold
- G4=15μ"Gold
- Packing: R=Tape&Reel+CAP
- P=Tape+CAP
- T=Tape

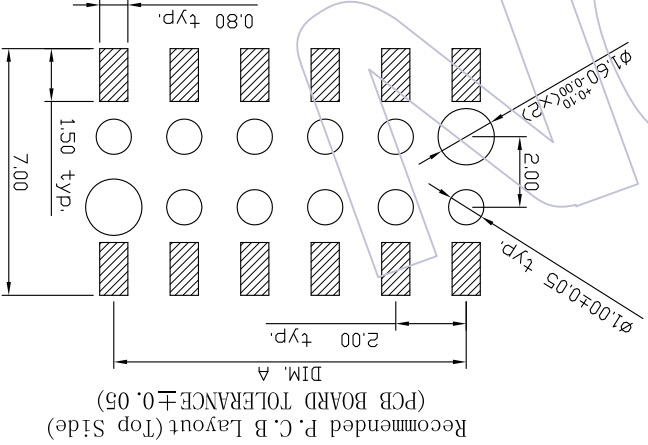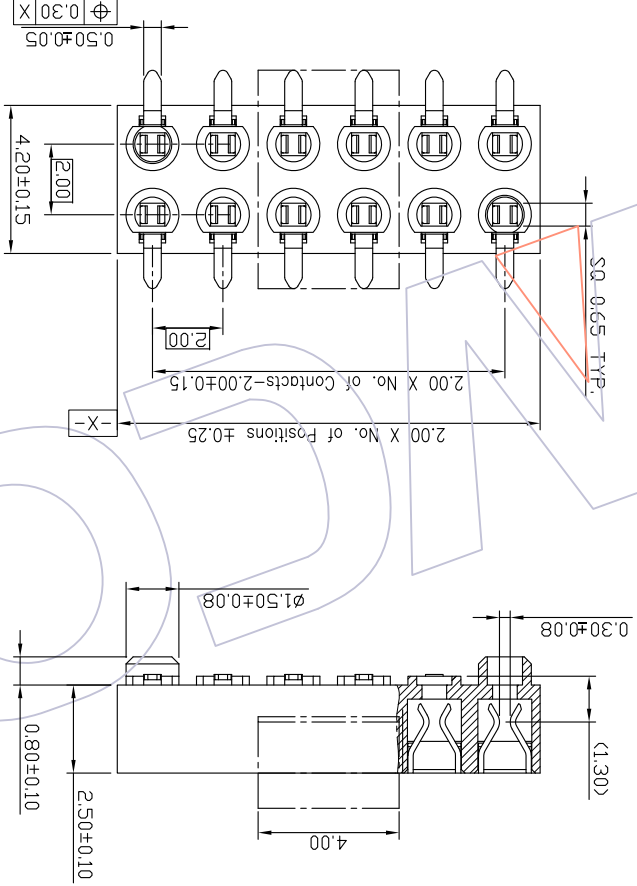

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE	DATE	PROJ.	Customer NO.	WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
A0	2016.07.10	NEW	---	Angle ± 3°	DATE	1/1	Customer NO.		
				X.XXX ±0.15	CHECK	DATE	SIZE	TITLE:	WCON Http: www.wcon.com
				X.XX ±0.25	Liu Hui	2016.07.10	A4	FH2.00mm DUAL ROW 180° SMT	
				X.X ±0.40	DRAW	DATE	UNIT	PART NO.	
						2016.07.10	mm	2228T-2XXXXXCUNX2	
					SCALE	DATE	FIT		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)