



NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃ to +105℃

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 (Std)
 Or PBT+30%G.F UL94V-0

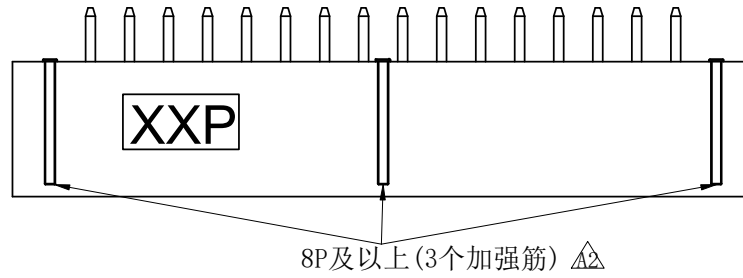



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

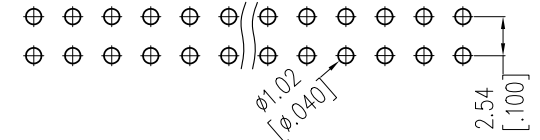

Ordering Information

3110-XX S XX X K00 XX

- | | | | |
|-------------|-------------------|-----------------|-----------------|
| No. of Pins | Contact Plating | Color Insulator | Packing: |
| 6P 24P | G0=Gold Flash | B=Black | A=Tray |
| 8P 26P | G3=10u"Gold | U=blue | T=Tube |
| 10P 30P | G4=15u"Gold | G=Gray(427C) | R=Tape&Reel+CAP |
| 12P 34P | G5=30u"Gold | E=Gray(413C) | |
| 14P 40P | S0=Gold Flash/Tin | | |
| 16P 50P | S3=10u"Gold/Tin | | |
| 18P 60P | S4=15u"Gold/Tin | | |
| 20P 64P | S5=30u"Gold/Tin | | |
| | SN=Tin | | |

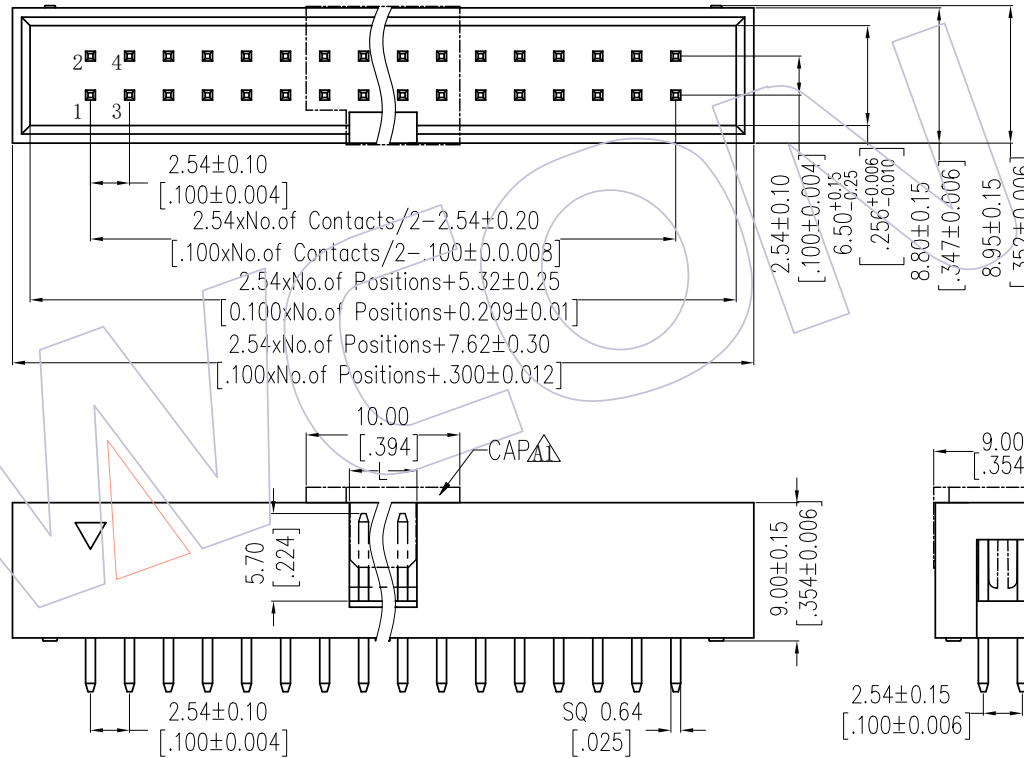

6P示意图 (2个加强筋)

Item	Pitch	Mating
Standard	2.54	5212/2185
Alternate		

Dimension antitheses list		
NO. Pin	STANDARD(A)	L
6P-8P	3.3mm	4.00
10P-64P		4.40

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2019/07/12	Modify	-----	x.X ±0.40	Ding	2019/07/12	UNIT mm		3110-XXSXXXK00XX
A1	2018/05/04	Add the CAP	-----	x.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: 2.54 BOX HEADER 180° H=9.0
AO	2012/09/25	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[571763P](#) [59811-0000](#) [61-168618-12P](#) [D20419-211](#) [D38999/20FJ24PA L/C](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#)
[G38A71314B](#) [DX40-50P\(55\)](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-](#)
[261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDR-E14MSG1+](#) [54182-0605](#)
[UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [DRA-26PC-F0R](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [DX40-20P\(55\)](#) [5554841-1](#)
[SM3100F14S-12P](#) [U90B3054061110](#) [U65-E04-4020](#) [557-262M2-06C](#) [60-042222-02S](#) [10099439-003C-TRLF](#) [226-0348-000](#) [10137239-](#)
[0011LF](#) [70.060.1028.0](#) [109029-ZZ](#) [HDR-E26MG1+](#) [SO-0715-02-01-02](#) [GT1-DA04CST](#) [231-303](#) [MS3112E16-8SX](#)