

HSF

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40℃ to +105℃





Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%GF(UL94V-0)
 CAP Material: LCP+30%G.F(UL94V-0)

Ordering Information

3121-XX M XX B K00 X X

| No. of Pins | Contact Plating | Color Insulator | Packing | Series No. |
|-------------|-------------------|-----------------|-----------------|------------|
| 14 30 | G0=Gold Flash | B=Black | T=Tube | 1=Type 1 |
| 16 34 | G3=10u"Gold | | P=Tube+CAP | 2=Type 2 |
| 20 40 | G4=15u"Gold | | R=Tape&REEL+CAP | |
| 24 44 | G5=30u"Gold | | | |
| 26 50 | S0=Gold Flash/Tin | | | |
| | S3=10u"Gold/Tin | | | |
| | S4=15u"Gold/Tin | | | |
| | S5=30u"Gold/Tin | | | |
| | SN=Tin | | | |

| Item | Pitch | Mating |
|-----------|-------|-----------|
| Standard | 2.00 | 5223/5226 |
| Alternate | | |

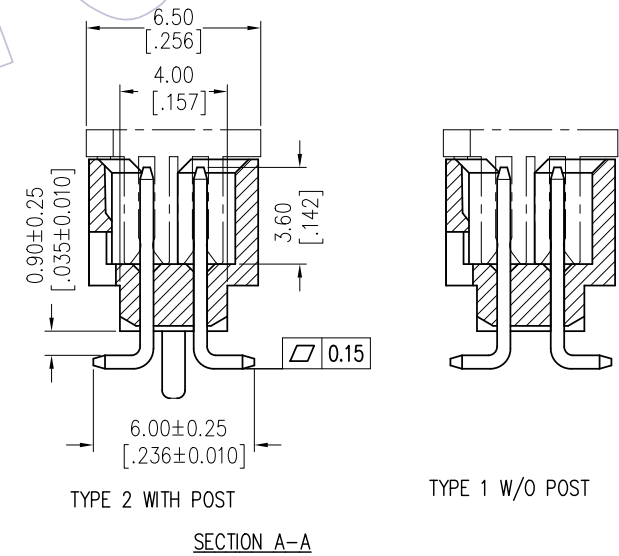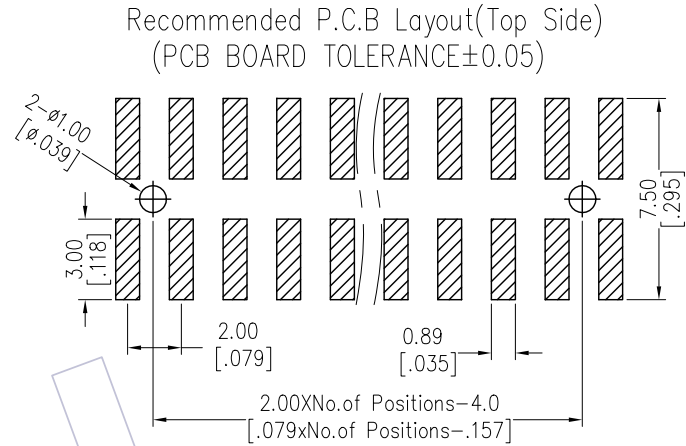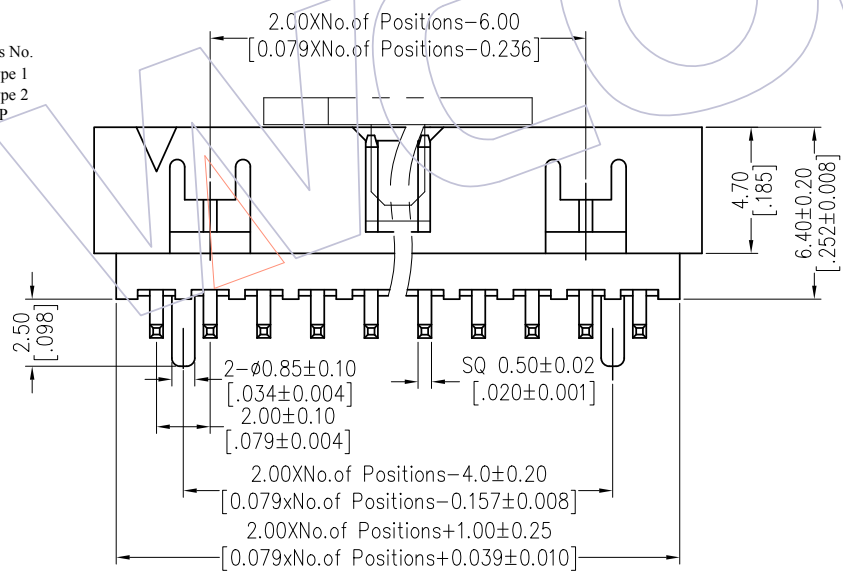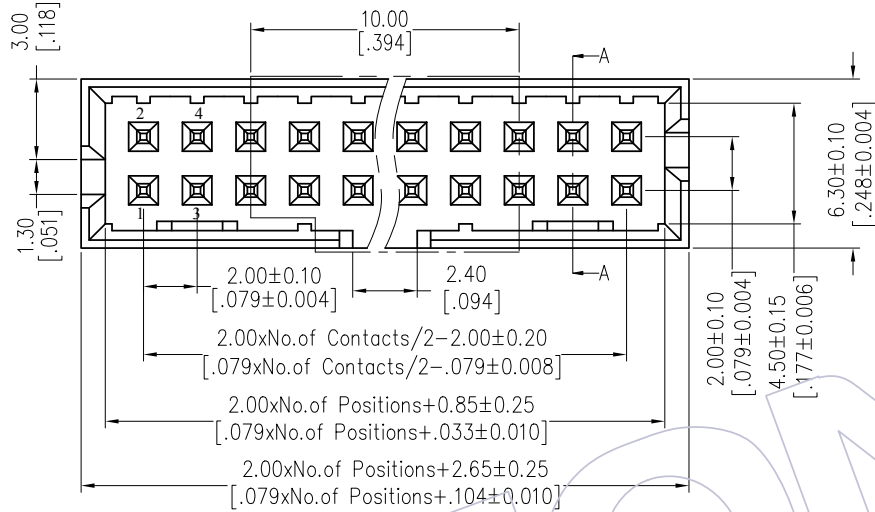

| OPERATION | | DRAW | DATE | SCALE | FIT | PART NO. |
|-----------|-------|---------|------------|-------|--------------|-------------------------------------|
| x.x | ±0.40 | | | | | |
| x.xx | ±0.25 | Allan | 2015/08/27 | UNIT | mm | 3121-XXMXXBK00XX |
| x.xxx | ±0.15 | CHECK | DATE | inch | A4 | |
| Angle | ± 3' | APPROVE | DATE | SHEET | 1/1 | TITLE: 2.00 BOX HEADER SMT H=6.4 |
| DIM | TOL | | | PROJ. | Customer NO. | |

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|-----|------------|--------------------------|--------|
| A1 | 2015/08/27 | Modify | △ |
| A0 | 2012/09/24 | NEW | — |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[571763P](#) [61-168618-12P](#) [D20419-211](#) [72.250.1628.2](#) [72.250.2428.2](#) [76.350.0729.0](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#) [G38A71314B](#) [9776-18-6](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [91-644626-35P](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDMR-29-01-S-SM-TR](#) [HDRA-E68W1LFDTC-SL+](#) [54182-0605](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [10-565995-597N](#) [10-584459-12P](#) [5554841-1](#) [SM3106F14S-7S-LC](#) [SM3106R18-18S](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [557-262M2-06C](#) [PCS-96LFD+](#) [60-042222-02S](#) [10099439-003C-TRLF](#)