

HSF

Recommended P. C. B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

NOTE:


- 1.MATERIAL:
 1.1 INSULATOR: LCP+30%G.F, UL94V-0; BLACK.
 1.2 CAP: LCP+30%G.F, UL94V-0; BLACK.
 1.3 CONTACT: PHOSPHOR BRONZE.
 1.4 MOUNTING EAR: PHOSPHOR BRONZE.
 2.FINISH:
 2.1 CONTACT: 3u" OR 5u" MIN. GOLD PLATED IN CONTACT AREA
 △ 80u" MIN. TIN PLATED IN SOLDER AREA
 50u" MIN. NICKEL UNDERPLATED OVERALL.
 2.2 MOUNTING EAR: 100u" MIN. TIN PLATED OVER
 50u" MIN. NICKEL UNDERPLATED OVERALL.
 3.ELECTRICAL CHARACTERISTICS
 3.1 CURRENT RATING: 0.5A.
 3.2 CONTACT RESISTANCE: 65mΩ MAX.
 3.3 INSULATION RESISTANCE: 1000MΩ MIN DC500V.
 3.4 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC PER MINUTE.
 3.5 OPERATING TEMPERATURE: -40°C ~ +105°C.
 3.6 OPERATING: 100 CYCLES MIN.
 3.7 INSERTION FORCE: 90g MAX. Per PIN PAIR.
 3.8 WITHDRAWAL FORCE: 10g MIN. Per PIN PAIR.
 3.9 CONTACT RETENTION FORCE: 250g MIN. PER CONTACT
 3.10 STORAGE TEMPERATURE: -10°C ~ +40°C.

Flatness: <80Pins The "M" Is 0.10mm MAX
 △ ≥80Pins The "M" Is 0.15mm MAX

Ordering Information

3614- P XXX - XXX XX R 01

No. of Pins High "H" Contact Plating Packing
 △ S1=3u"Gold/Tin R=Tape&Reel+CAP
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

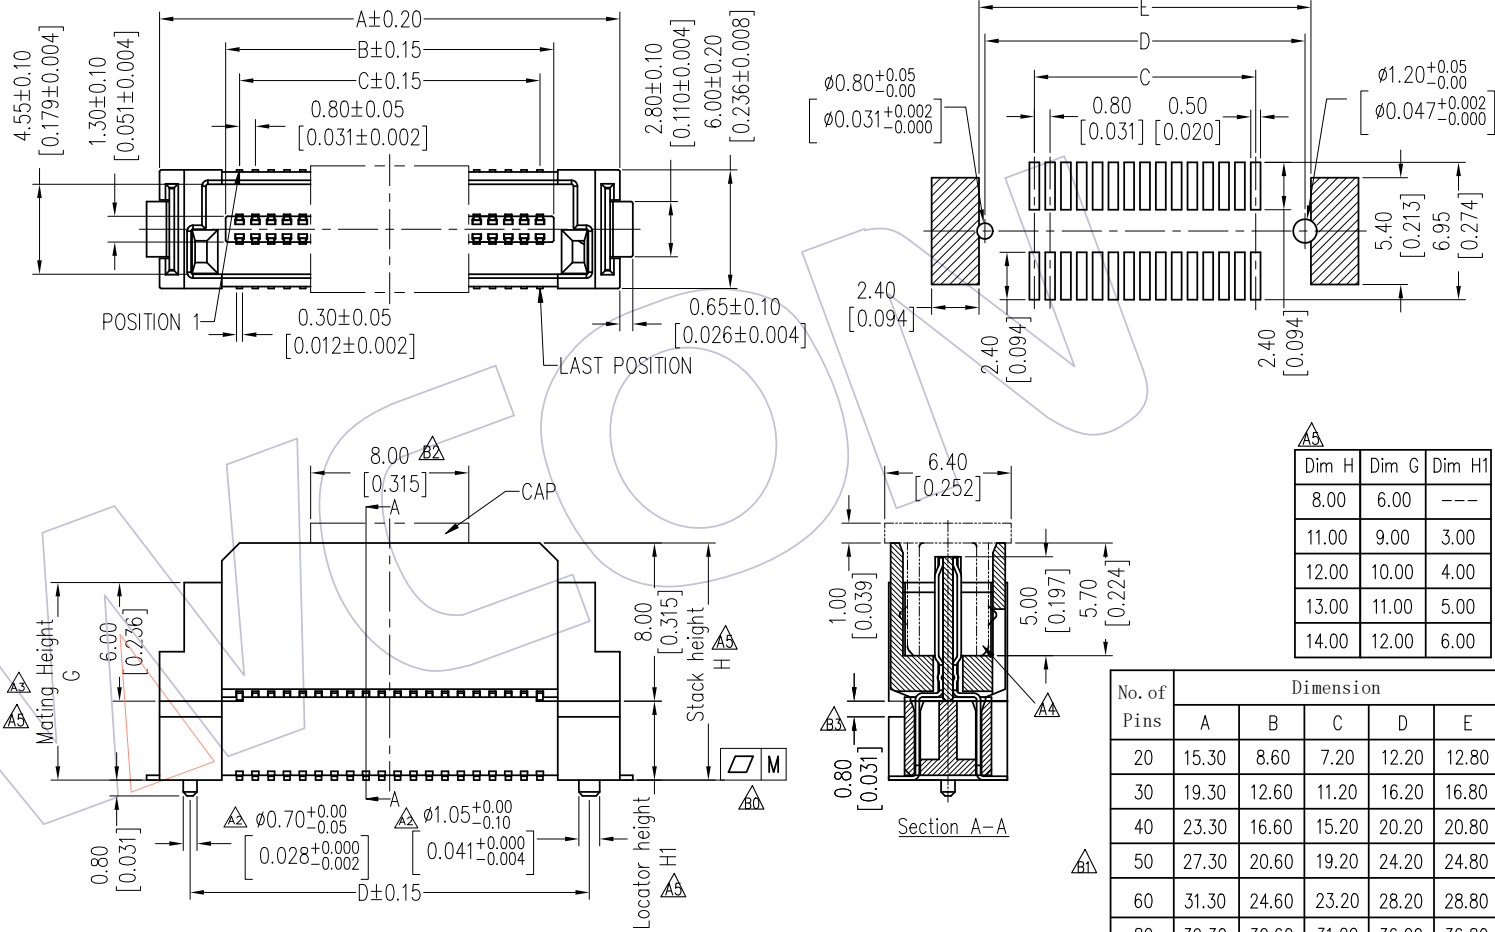

No. of Pins	Dimension				
	A	B	C	D	E
20	15.30	8.60	7.20	12.20	12.80
30	19.30	12.60	11.20	16.20	16.80
40	23.30	16.60	15.20	20.20	20.80
50	27.30	20.60	19.20	24.20	24.80
60	31.30	24.60	23.20	28.20	28.80
80	39.30	32.60	31.20	36.20	36.80
100	47.30	40.60	39.20	44.20	44.80
120	55.30	48.60	47.20	52.20	52.80
160	71.30	64.60	63.20	68.20	68.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
B3	2018/05/24	Modify	△	OPERATION	Ding	2018/05/24	mm		3614-PXXX-XXXXR01
B2	2016/11/18	Modify CAP Length	△	x.x ±0.40	CHECK	DATE	inch		
B1	2016/08/08	ADD 50Pin	△	x.xx ±0.25			A4		TITLE: 0.80mm BTB MALE "D" TYPE 180° SMT
A0	2010/03/09	NEW	—	x.xxx ±0.15	APPROVE	DATE	1/1		
				Angle ± 3°					Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [93696-330](#) [224393](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [45970-4130](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [101A10019X](#) [105061100000861+](#) [55650-0588-C](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [YTT-112-01-H-Q](#) [063209](#) [0717420006](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [YTQ-11201HQ](#) [IL-WX-10PB-HF-B-E1000E](#) [YFT-50-05-H-10-SB-K](#) [FCN-268M024-G/3D](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [74220-001](#) [354184](#) [P50-028-DDS-TG](#)